



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®\_rate2006 = 180

ProLiant BL465c Gen8  
(3.30 GHz AMD Opteron 6204)

SPECint\_rate\_base2006 = 160

CPU2006 license: 3


Test date: Jun-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

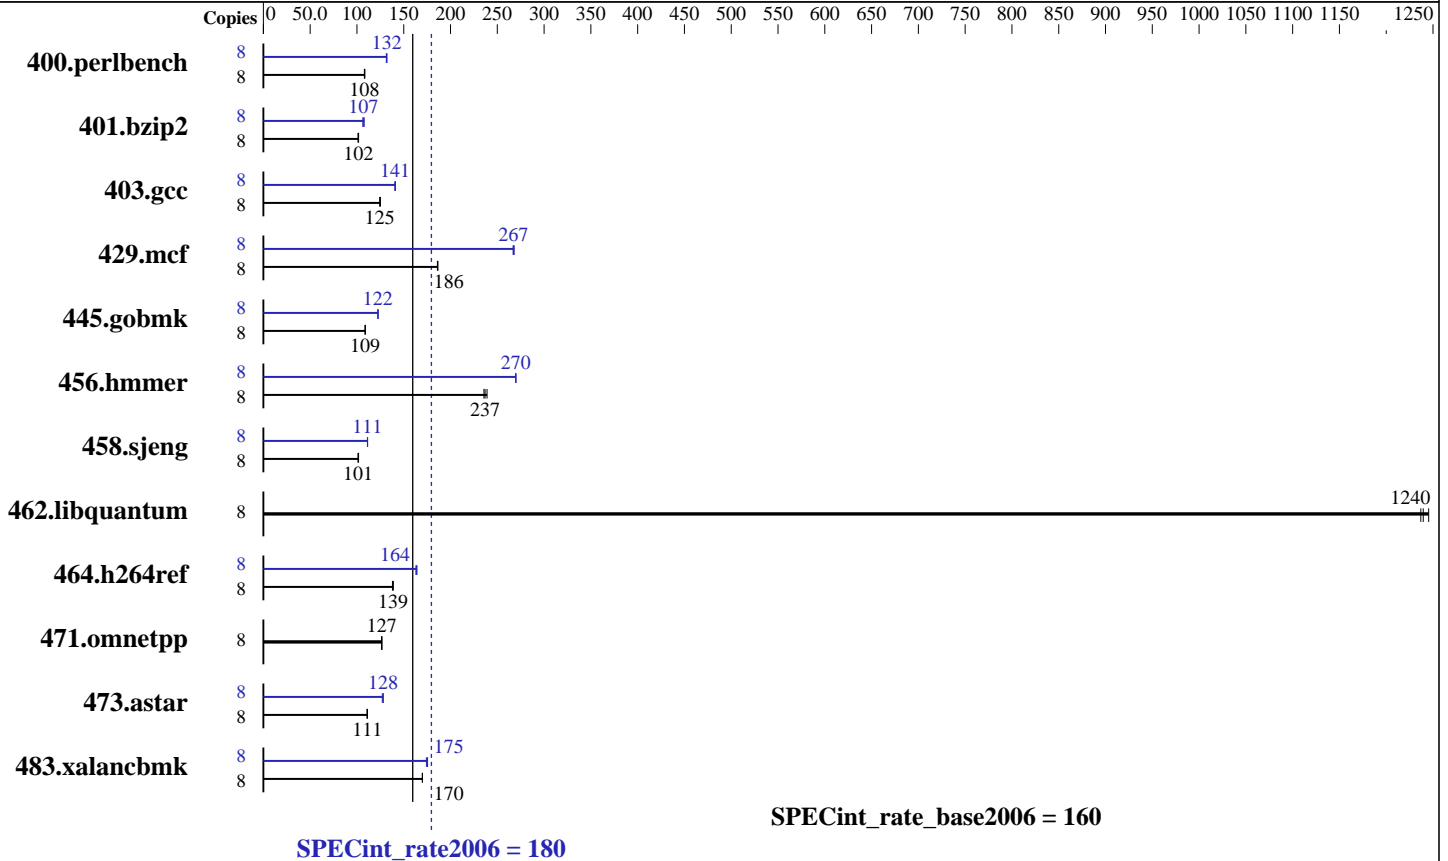

### Hardware

CPU Name: AMD Opteron 6204  
 CPU Characteristics:  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 128 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 146 GB 15 K SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2,  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 4.5.1 of  
 x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 180

ProLiant BL465c Gen8  
(3.30 GHz AMD Opteron 6204)

SPECint\_rate\_base2006 = 160

CPU2006 license: 3

Test date: Jun-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	721	108	<u>722</u>	<u>108</u>	724	108	8	592	132	<u>593</u>	<u>132</u>	595	131
401.bzip2	8	764	101	759	102	<u>760</u>	<u>102</u>	8	726	106	716	108	<u>723</u>	<u>107</u>
403.gcc	8	517	124	515	125	<u>517</u>	<u>125</u>	8	458	141	<u>458</u>	<u>141</u>	457	141
429.mcf	8	<u>392</u>	<u>186</u>	392	186	391	187	8	273	267	272	268	<u>273</u>	<u>267</u>
445.gobmk	8	770	109	<u>771</u>	<u>109</u>	771	109	8	685	122	685	123	<u>685</u>	<u>122</u>
456.hammer	8	317	236	312	239	<u>315</u>	<u>237</u>	8	277	270	<u>277</u>	<u>270</u>	277	270
458.sjeng	8	<u>955</u>	<u>101</u>	956	101	952	102	8	869	111	871	111	<u>869</u>	<u>111</u>
462.libquantum	8	134	1240	<u>134</u>	<u>1240</u>	133	1250	8	134	1240	<u>134</u>	<u>1240</u>	133	1250
464.h264ref	8	<u>1278</u>	<u>139</u>	1283	138	1276	139	8	1079	164	<u>1081</u>	<u>164</u>	1086	163
471.omnetpp	8	396	126	<u>395</u>	<u>127</u>	395	127	8	396	126	<u>395</u>	<u>127</u>	395	127
473.astar	8	<u>505</u>	<u>111</u>	507	111	505	111	8	<u>439</u>	<u>128</u>	438	128	442	127
483.xalancbmk	8	325	170	325	170	<u>325</u>	<u>170</u>	8	315	175	<u>315</u>	<u>175</u>	317	174

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr\_hugepages=7168 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

BIOS configuration:  
HP Power Profile set to Maximum Performance  
Thermal Configuration set to Maximum Cooling  
System Locality Information Table to Disabled  
Minimum Processor Idle Power Cle State to Enabled



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 180**

ProLiant BL465c Gen8  
(3.30 GHz AMD Opteron 6204)

**SPECint\_rate\_base2006 = 160**

**CPU2006 license:** 3

**Test date:** Jun-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "480"

LD\_LIBRARY\_PATH = "/cpu2006/amd1104-rate-libs-revC/32:/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2

C++ benchmarks:

-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 180

ProLiant BL465c Gen8  
(3.30 GHz AMD Opteron 6204)

SPECint\_rate\_base2006 = 160

CPU2006 license: 3

Test date: Jun-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
-IPA:plimit=20000 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
-CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
-OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
-HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
-HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
-INLINE:aggressive=on -CG:gcm=off -CG:dsched=on
-GRA:prioritize_by_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
-OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 180**

ProLiant BL465c Gen8  
(3.30 GHz AMD Opteron 6204)

**SPECint\_rate\_base2006 = 160**

**CPU2006 license:** 3

**Test date:** Jun-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

445.gobmk (continued):

-LNO:ignore\_feedback=off -WOPT:if\_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2

-OPT:alias=disjoint -OPT:unroll\_times\_max=16

-OPT:unroll\_size=512 -OPT:unroll\_level=2 -OPT:keep\_ext=on

-CG:cflow=0 -CG:cmp\_peep=on -CG:pre\_local\_sched=off

-HP:bd=2m:heap=2m

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0

-CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on

-LNO:full\_unroll=10 -IPA:pu\_reorder=2 -HP:heap=2m:bd=2m

-WOPT:sib=on

462.libquantum: basepeak = yes

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256

-OPT:unroll\_times\_max=2 -IPA:plimit=20000

-OPT:alias=disjoint -CG:ptr\_load\_use=0

-CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off

-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on

-CG:p2align=1 -CG:dsched=on -GRA:optimize\_boundary=on

-OPT:alias=disjoint -INLINE:aggressive=on

-IPA:small\_pu=3000 -IPA:plimit=3000 -m32

-HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512

-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET

-INLINE:aggressive=on -m32 -CG:cmp\_peep=on

-CG:local\_sched=off -CG:p2align=1 -GRA:unspill=on

-TENV:frame\_pointer=off -fno-emit-exceptions

-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20120703.html>

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20120703.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml>

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL465c Gen8  
(3.30 GHz AMD Opteron 6204)

**SPECint\_rate2006 = 180**

**SPECint\_rate\_base2006 = 160**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 09:43:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 July 2012.