



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp[®]_rate2006 = 392

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECfp_rate_base2006 = 383

CPU2006 license: 6


Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Oct-2011

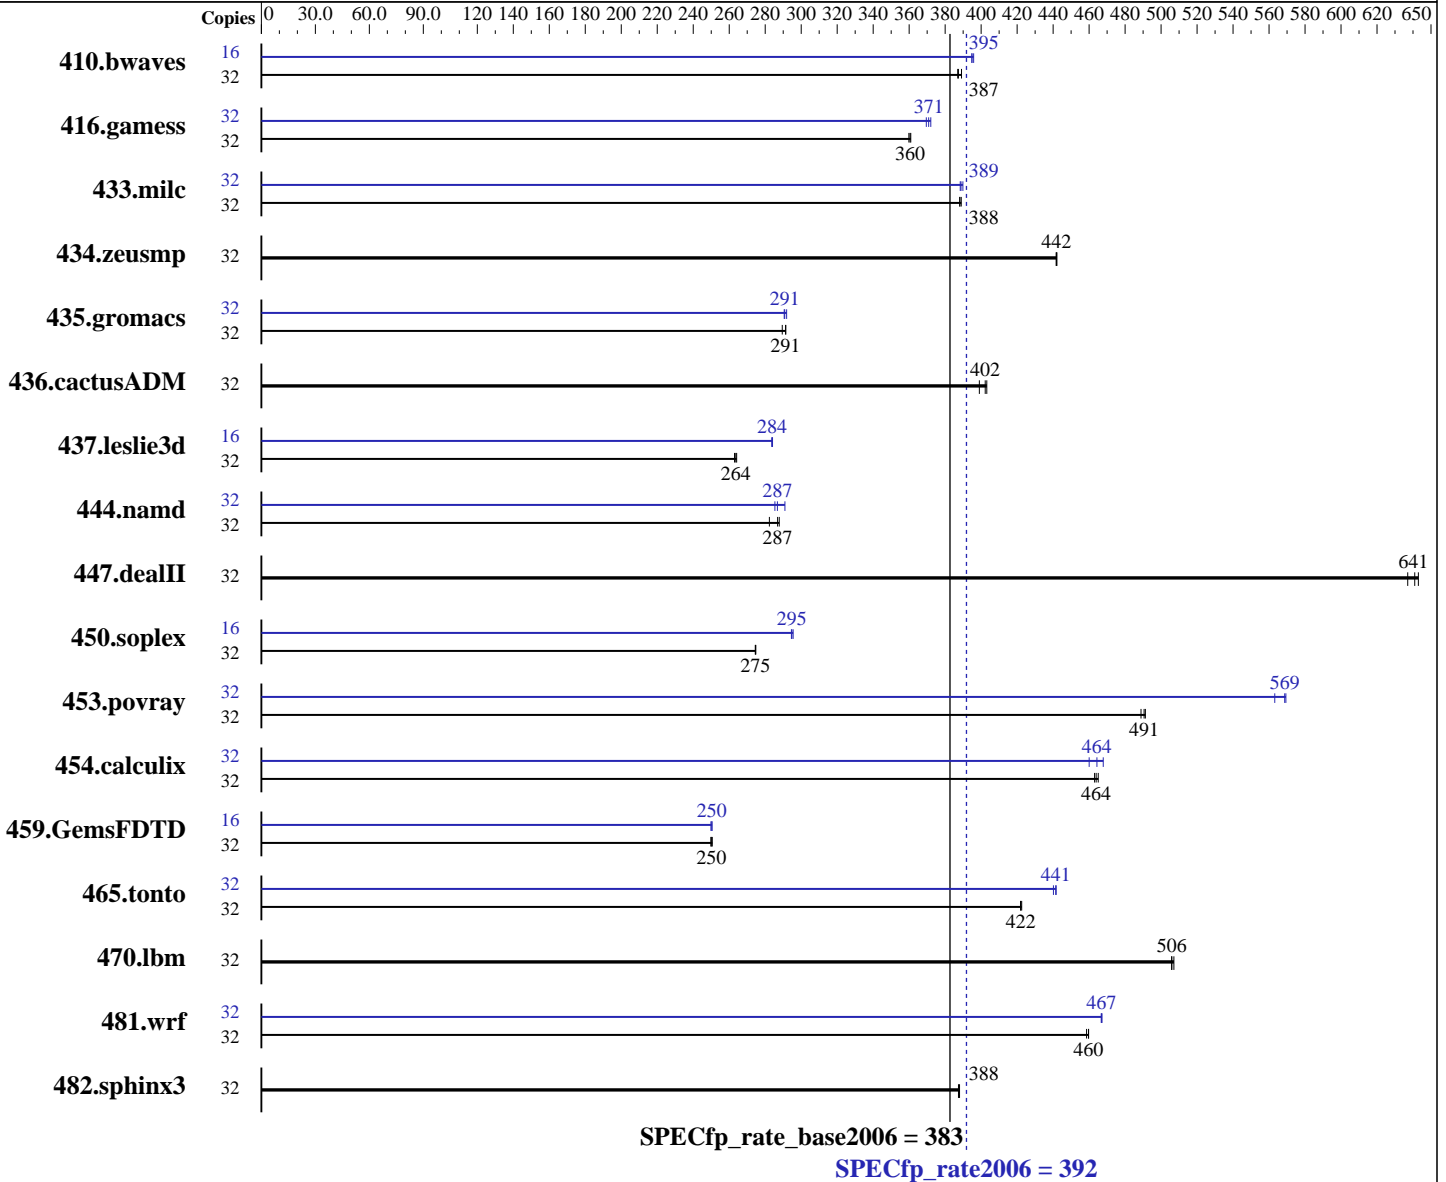

Hardware

CPU Name: Intel Xeon E5-2658
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Oracle Linux Server release 6.1
 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 5 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 392

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECfp_rate_base2006 = 383

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Oct-2011

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 300 GB 10K RPM SAS
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1118	389	<u>1123</u>	<u>387</u>	1124	387	16	<u>551</u>	<u>395</u>	549	396	551	395
416.gamess	32	1736	361	1741	360	<u>1738</u>	<u>360</u>	32	<u>1690</u>	<u>371</u>	1684	372	1696	370
433.milc	32	757	388	<u>757</u>	<u>388</u>	755	389	32	753	390	756	388	<u>756</u>	<u>389</u>
434.zeusmp	32	659	442	659	442	<u>659</u>	<u>442</u>	32	659	442	659	442	<u>659</u>	<u>442</u>
435.gromacs	32	789	289	<u>784</u>	<u>291</u>	784	291	32	783	292	786	291	<u>786</u>	<u>291</u>
436.cactusADM	32	<u>951</u>	<u>402</u>	958	399	949	403	32	<u>951</u>	<u>402</u>	958	399	949	403
437.leslie3d	32	1144	263	<u>1141</u>	<u>264</u>	1139	264	16	529	284	<u>530</u>	<u>284</u>	530	284
444.namd	32	<u>895</u>	<u>287</u>	892	288	909	282	32	899	285	<u>895</u>	<u>287</u>	882	291
447.dealII	32	569	643	575	637	<u>571</u>	<u>641</u>	32	569	643	575	637	<u>571</u>	<u>641</u>
450.soplex	32	971	275	<u>972</u>	<u>275</u>	972	274	16	452	296	453	295	<u>453</u>	<u>295</u>
453.povray	32	348	489	347	491	<u>347</u>	<u>491</u>	32	<u>299</u>	<u>569</u>	299	569	302	563
454.calculix	32	568	465	<u>569</u>	<u>464</u>	570	463	32	564	468	<u>569</u>	<u>464</u>	574	460
459.GemsFDTD	32	1355	251	1359	250	<u>1358</u>	<u>250</u>	16	678	250	679	250	<u>678</u>	<u>250</u>
465.tonto	32	<u>746</u>	<u>422</u>	746	422	745	423	32	<u>713</u>	<u>441</u>	713	442	715	440
470.lbm	32	867	507	<u>869</u>	<u>506</u>	869	506	32	867	507	<u>869</u>	<u>506</u>	869	506
481.wrf	32	778	460	<u>778</u>	<u>460</u>	779	459	32	766	467	<u>765</u>	<u>467</u>	765	467
482.sphinx3	32	1610	387	<u>1609</u>	<u>388</u>	1607	388	32	1610	387	<u>1609</u>	<u>388</u>	1607	388

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Default BIOS Settings were used.

Oracle's Netra Server X3-2 was formerly known as the Sun Netra X4270 M3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 392

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECfp_rate_base2006 = 383

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Mar-2012

Hardware Availability: Apr-2012

Software Availability: Oct-2011

Platform Notes (Continued)

Sysinfo program /data1/cpu2006v1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3
running on pae-sb-02 Wed Mar 21 20:28:09 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2658 0 @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal: 132288120 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Oracle Linux Server release 6.1
```

```
From /etc/*release* /etc/*version*
oracle-release: Oracle Linux Server release 6.1
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Oracle Linux Server release 6.1
system-release-cpe: cpe:/o:oracle:oracle_linux:6server:ga:server
```

```
uname -a:
Linux pae-sb-02 2.6.32-131.0.15.el6.x86_64 #1 SMP Fri May 20 15:04:03 EDT
2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Mar 16 16:49
```

```
SPEC is set to: /data1/cpu2006v1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/vg_paesb02-lv_root
ext4 50G 11G 37G 23% /
```

Additional information from dmidecode:

```
Memory:
16x Samsung M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 392

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECfp_rate_base2006 = 383

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Oct-2011

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/data1/cpu2006v1.2/libs/32:/data1/cpu2006v1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages disabled with:
echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 392

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECfp_rate_base2006 = 383

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Oct-2011

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 392

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECfp_rate_base2006 = 383

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Oct-2011

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 392

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECfp_rate_base2006 = 383

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Mar-2012

Hardware Availability: Apr-2012

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:43:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 July 2012.