



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M4  
(Intel Pentium G640, 2.80 GHz)

**SPECint®2006 = 36.2**

**SPECint\_base2006 = 34.4**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

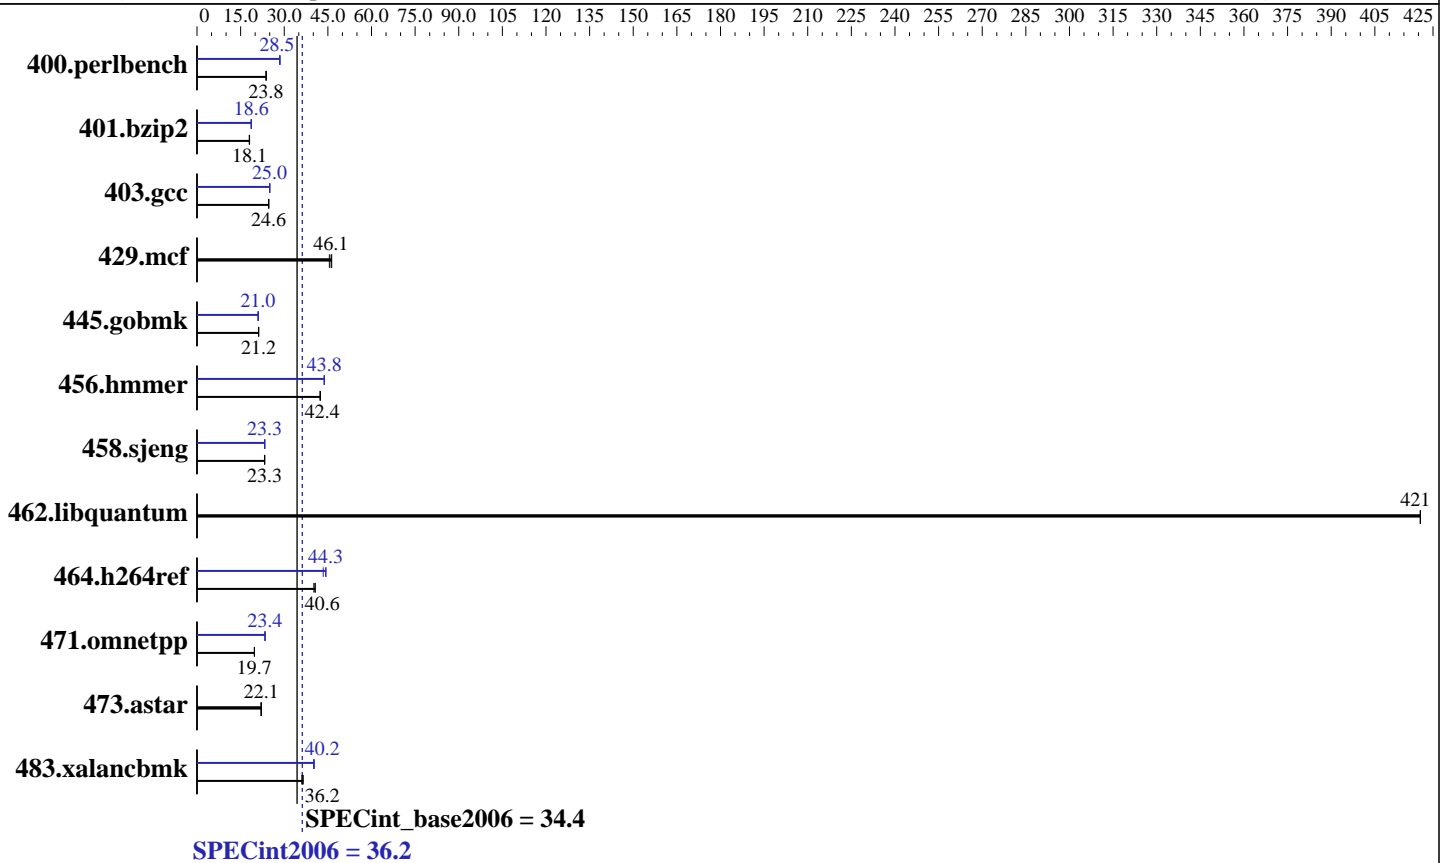

### Hardware

CPU Name: Intel Pentium G640  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC, running at 1066 MHz)  
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M4  
(Intel Pentium G640, 2.80 GHz)

SPECint2006 = 36.2

SPECint\_base2006 = 34.4

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Sep-2012  
Hardware Availability: May-2012  
Software Availability: Dec-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b><u>411</u></b>	<b><u>23.8</u></b>	411	23.7	411	23.8	343	28.5	<b><u>343</u></b>	<b><u>28.5</u></b>	343	28.5
401.bzip2	<b><u>534</u></b>	<b><u>18.1</u></b>	534	18.1	537	18.0	<b><u>517</u></b>	<b><u>18.6</u></b>	518	18.6	517	18.7
403.gcc	326	24.7	<b><u>327</u></b>	<b><u>24.6</u></b>	327	24.6	322	25.0	322	25.0	<b><u>322</u></b>	<b><u>25.0</u></b>
429.mcf	200	45.5	197	46.3	<b><u>198</u></b>	<b><u>46.1</u></b>	200	45.5	197	46.3	<b><u>198</u></b>	<b><u>46.1</u></b>
445.gobmk	<b><u>495</u></b>	<b><u>21.2</u></b>	495	21.2	495	21.2	499	21.0	499	21.0	<b><u>499</u></b>	<b><u>21.0</u></b>
456.hammer	220	42.4	<b><u>220</u></b>	<b><u>42.4</u></b>	220	42.3	<b><u>213</u></b>	<b><u>43.8</u></b>	213	43.8	213	43.8
458.sjeng	521	23.2	<b><u>520</u></b>	<b><u>23.3</u></b>	519	23.3	<b><u>519</u></b>	<b><u>23.3</u></b>	520	23.3	519	23.3
462.libquantum	49.3	421	49.3	421	<b><u>49.3</u></b>	<b><u>421</u></b>	49.3	421	49.3	421	<b><u>49.3</u></b>	<b><u>421</u></b>
464.h264ref	551	40.2	<b><u>545</u></b>	<b><u>40.6</u></b>	545	40.6	510	43.4	499	44.4	<b><u>500</u></b>	<b><u>44.3</u></b>
471.omnetpp	<b><u>317</u></b>	<b><u>19.7</u></b>	316	19.8	317	19.7	267	23.4	268	23.4	<b><u>267</u></b>	<b><u>23.4</u></b>
473.astar	317	22.2	319	22.0	<b><u>317</u></b>	<b><u>22.1</u></b>	317	22.2	319	22.0	<b><u>317</u></b>	<b><u>22.1</u></b>
483.xalancbmk	189	36.5	<b><u>190</u></b>	<b><u>36.2</u></b>	191	36.1	171	40.3	172	40.1	<b><u>172</u></b>	<b><u>40.2</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Settings:

Turbo Mode enabled in BIOS

C-State enabled in BIOS

Sysinfo program /root/SPECcpul.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost.localdomain Thu Sep 27 06:08:13 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

### From /proc/cpuinfo

model name : Intel(R) Pentium(R) CPU G640 @ 2.80GHz

1 "physical id"s (chips)

2 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 2

siblings : 2

physical 0: cores 0 1

cache size : 3072 KB

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint2006 = 36.2**

IBM System x3250 M4  
(Intel Pentium G640, 2.80 GHz)

**SPECint\_base2006 = 34.4**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Sep-2012  
**Hardware Availability:** May-2012  
**Software Availability:** Dec-2011

## Platform Notes (Continued)

```

From /proc/meminfo
  MemTotal:      16322724 kB
  HugePages_Total: 0
  Hugepagesize:  2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
  redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
  system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
  EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 25 15:52

SPEC is set to: /root/SPECcpul.2
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                 ext4      50G       20G   28G   43% /

Additional information from dmidecode:
Memory:
  2x Micron 18JSF1G72AZ-1G6D1 8 GB 1067 MHz 2 rank

(End of data from sysinfo program)

```

## General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/SPECcpul.2/libs/32:/root/SPECcpul.2/libs/64"
OMP_NUM_THREADS = "2"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:

```

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

```

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3250 M4  
(Intel Pentium G640, 2.80 GHz)

**SPECint2006 = 36.2**

**SPECint\_base2006 = 34.4**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Sep-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/smartheap -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32`

`445.gobmk: icc -m32`

`464.h264ref: icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

`473.astar: icpc -m64`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint2006 = 36.2**

IBM System x3250 M4  
(Intel Pentium G640, 2.80 GHz)

**SPECint\_base2006 = 34.4**

**CPU2006 license:** 11

**Test date:** Sep-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** May-2012

**Tested by:** IBM Corporation

**Software Availability:** Dec-2011

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block -ansi-alias
              -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3250 M4  
(Intel Pentium G640, 2.80 GHz)

**SPECint2006 = 36.2**

**SPECint\_base2006 = 34.4**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Sep-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 13:53:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 October 2012.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>