



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,  
Opteron 6344)  
AMD Opteron 6344

SPECint®\_rate2006 = 441

SPECint\_rate\_base2006 = 394

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

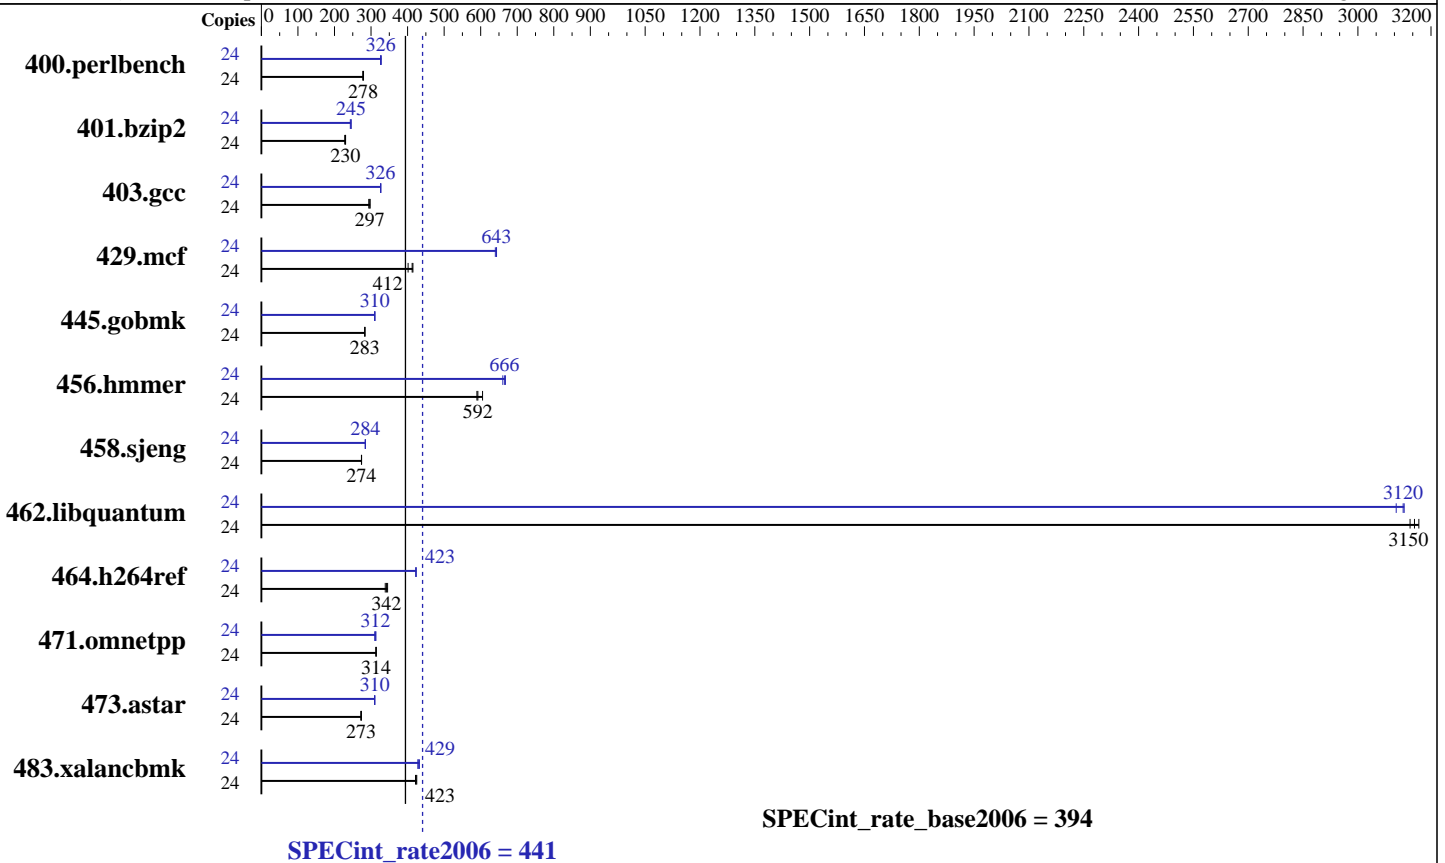

### Hardware

CPU Name: AMD Opteron 6344  
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 384 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores  
 Other Cache: None  
 Memory: 64 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x XXX GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2,  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite  
 (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,  
Opteron 6344)  
AMD Opteron 6344

SPECint\_rate2006 = 441

SPECint\_rate\_base2006 = 394

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	845	278	839	279	<b>843</b>	<b>278</b>	24	719	326	715	328	<b>718</b>	<b>326</b>
401.bzip2	24	1005	230	1016	228	<b>1007</b>	<b>230</b>	24	952	243	944	245	<b>944</b>	<b>245</b>
403.gcc	24	650	297	<b>652</b>	<b>297</b>	658	294	24	591	327	<b>592</b>	<b>326</b>	592	326
429.mcf	24	545	401	<b>531</b>	<b>412</b>	528	415	24	<b>340</b>	<b>643</b>	340	643	342	640
445.gobmk	24	<b>889</b>	<b>283</b>	890	283	889	283	24	811	311	<b>812</b>	<b>310</b>	812	310
456.hammer	24	370	605	<b>378</b>	<b>592</b>	380	590	24	339	661	<b>336</b>	<b>666</b>	335	668
458.sjeng	24	1060	274	1061	274	<b>1060</b>	<b>274</b>	24	<b>1021</b>	<b>284</b>	1022	284	1020	285
462.libquantum	24	158	3140	157	3170	<b>158</b>	<b>3150</b>	24	160	3100	159	3130	<b>159</b>	<b>3120</b>
464.h264ref	24	1538	345	<b>1552</b>	<b>342</b>	1567	339	24	1254	424	<b>1256</b>	<b>423</b>	1257	423
471.omnetpp	24	479	313	<b>478</b>	<b>314</b>	477	314	24	484	310	<b>481</b>	<b>312</b>	479	313
473.astar	24	616	274	619	272	<b>617</b>	<b>273</b>	24	<b>543</b>	<b>310</b>	543	310	544	310
483.xalancbmk	24	<b>391</b>	<b>423</b>	390	425	393	422	24	387	428	383	432	<b>386</b>	<b>429</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,  
Opteron 6344)  
AMD Opteron 6344

SPECint\_rate2006 = 441

SPECint\_rate\_base2006 = 394

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Oct-2012  
**Hardware Availability:** Nov-2012  
**Software Availability:** Aug-2012

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000  
-IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2  
-march=bdver1

C++ benchmarks:  
-Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on -D\_\_OPEN64\_FAST\_SET  
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,  
Opteron 6344)  
AMD Opteron 6344

SPECint\_rate2006 = 441

SPECint\_rate\_base2006 = 394

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
 -WOPT:sib=on -CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
 -CG:movext\_icmp=off -HP:bd=2m:heap=2m -march=bdver1  
 -GRA:aggr\_loop\_splitting=off -GRA:loop\_splitting=off

401.bzip2: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
 -LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint  
 -OPT:goto=off -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m  
 -march=bdver2

403.gcc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:trip\_count=256 -CG:cmp\_peep=on -CG:pre\_minreg\_level=2  
 -m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
 -WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll\_times\_max=5 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -CG:dsched=on -GRA:prioritize\_by\_density=on  
 -m32 -HP:bd=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -OPT:unroll\_size=256 -OPT:unroll\_times\_max=8  
 -OPT:keep\_ext=on -IPA:plimit=750 -IPA:min\_hotness=300  
 -IPA:pu\_reorder=1 -LNO:ignore\_feedback=off -WOPT:if\_conv=2  
 -HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:prefetch=2 -OPT:alias=disjoint  
 -OPT:unroll\_times\_max=16 -OPT:unroll\_size=512  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -CG:cflow=0  
 -CG:cmp\_peep=on -CG:pre\_local\_sched=off -HP:bd=2m:heap=2m  
 -CG:p2align=0 -CG:load\_exe=3 -CG:dsched=on -march=bdver1

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,  
Opteron 6344)  
AMD Opteron 6344

**SPECint\_rate2006 = 441**

**SPECint\_rate\_base2006 = 394**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Aug-2012

## Peak Optimization Flags (Continued)

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-CG:ptr\_load\_use=0 -CG:divrem\_opt=on -CG:movext\_icmp=off  
-CG:locs\_best=on -LNO:full\_unroll=10 -IPA:pu\_reorder=2  
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: -Ofast -mso -OPT:unroll\_size=512 -OPT:unroll\_times\_max=16  
-LNO:prefetch=2 -LNO:prefetch\_ahead=4 -LNO:pf2=0  
-CG:local\_sched\_alg=1 -CG:p2align=0 -INLINE:aggressive=ON  
-IPA:plimit=15000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m,limit=300 -march=bdver2

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:unroll\_size=256 -OPT:unroll\_times\_max=2  
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-WOPT:sib=on -D\_\_OPEN64\_FAST\_SET -march=bdver2 -mno-fma4  
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-CG:p2align=1 -CG:dsched=on -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m  
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -CG:p2align=1 -GRA:unspill=on  
-TENV:frame\_pointer=off -fno-emit-exceptions -march=bdver2  
-mno-fma4  
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,  
Opteron 6344)  
AMD Opteron 6344

**SPECint\_rate2006 = 441**

**SPECint\_rate\_base2006 = 394**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Aug-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:33:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 January 2013.