



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5038ML-H12TRF (X10SLE-F single node, Intel E3-1285L v3)

SPECint®\_rate2006 = 210

SPECint\_rate\_base2006 = 203

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2013

Hardware Availability: Jun-2013

Software Availability: May-2013

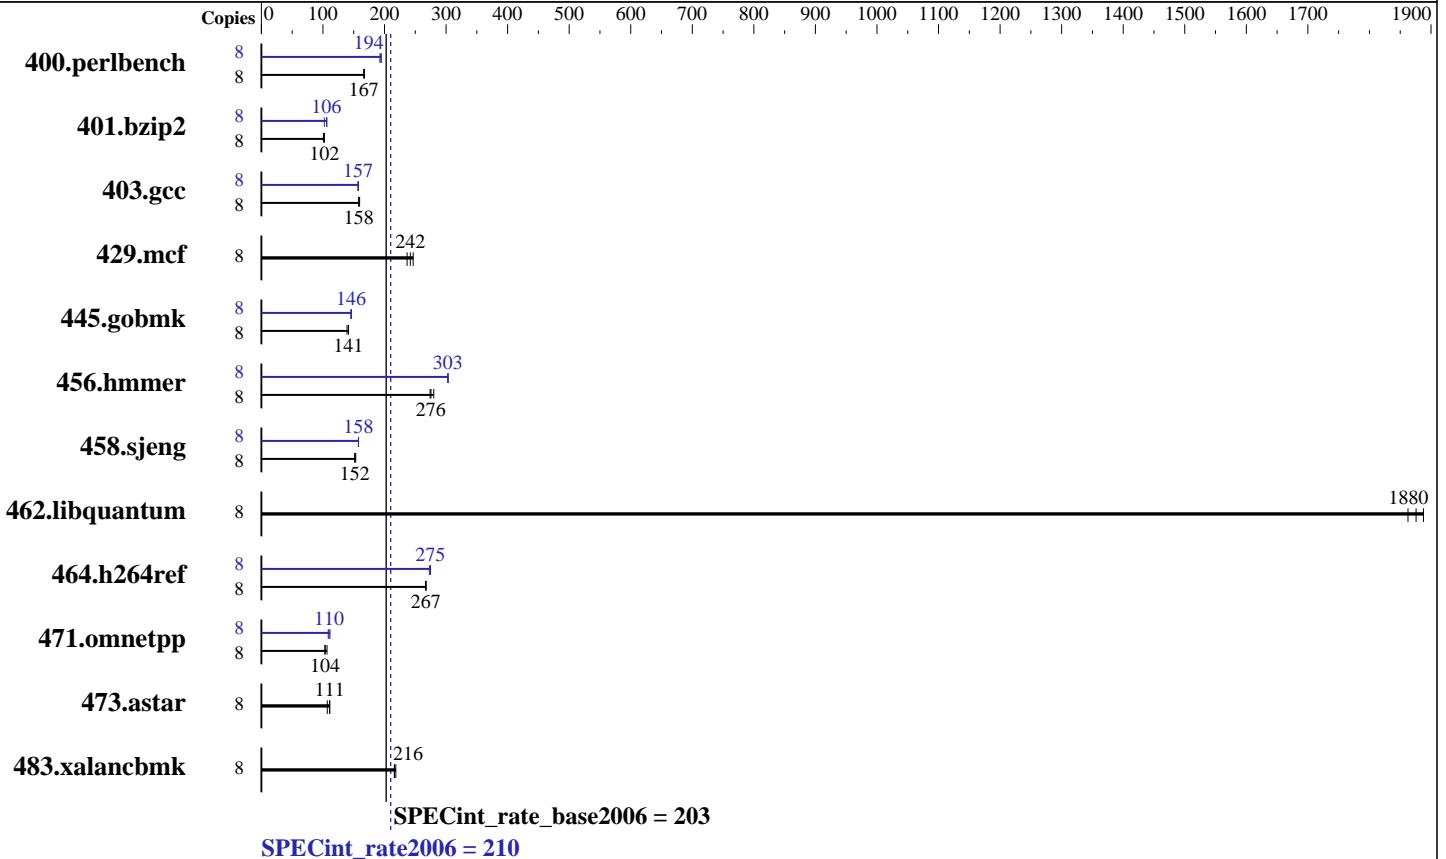

### Hardware

CPU Name: Intel Xeon E3-1285L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATA III, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Kernel 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5038ML-H12TRF (X10SLE-F single node, Intel E3-1285L v3)

SPECint\_rate2006 = 210

SPECint\_rate\_base2006 = 203

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jun-2013  
Hardware Availability: Jun-2013  
Software Availability: May-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	467	167	469	167	<b>469</b>	<b>167</b>	8	406	193	<b>403</b>	<b>194</b>	401	195
401.bzip2	8	766	101	<b>754</b>	<b>102</b>	754	102	8	<b>729</b>	<b>106</b>	755	102	725	106
403.gcc	8	404	160	<b>407</b>	<b>158</b>	407	158	8	<b>409</b>	<b>157</b>	409	157	411	157
429.mcf	8	308	237	<b>301</b>	<b>242</b>	296	247	8	308	237	<b>301</b>	<b>242</b>	296	247
445.gobmk	8	603	139	593	142	<b>593</b>	<b>141</b>	8	<b>576</b>	<b>146</b>	574	146	576	146
456.hammer	8	<b>271</b>	<b>276</b>	272	274	267	280	8	246	303	246	303	<b>246</b>	<b>303</b>
458.sjeng	8	631	153	639	152	<b>637</b>	<b>152</b>	8	614	158	613	158	<b>613</b>	<b>158</b>
462.libquantum	8	<b>88.4</b>	<b>1880</b>	87.8	1890	89.0	1860	8	<b>88.4</b>	<b>1880</b>	87.8	1890	89.0	1860
464.h264ref	8	662	268	663	267	<b>663</b>	<b>267</b>	8	644	275	<b>645</b>	<b>275</b>	649	273
471.omnetpp	8	<b>482</b>	<b>104</b>	485	103	469	107	8	460	109	449	111	<b>455</b>	<b>110</b>
473.astar	8	525	107	506	111	<b>506</b>	<b>111</b>	8	525	107	506	111	<b>506</b>	<b>111</b>
483.xalancbmk	8	253	218	<b>255</b>	<b>216</b>	256	216	8	253	218	<b>255</b>	<b>216</b>	256	216

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5038ML-H12TRF (X10SLE-F single node, Intel E3-1285L v3)

SPECint\_rate2006 = 210

SPECint\_rate\_base2006 = 203

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2013

Hardware Availability: Jun-2013

Software Availability: May-2013

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5038ML-H12TRF (X10SLE-F single node, Intel E3-1285L v3)

**SPECint\_rate2006 = 210**

**SPECint\_rate\_base2006 = 203**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jun-2013

**Hardware Availability:** Jun-2013

**Software Availability:** May-2013

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5038ML-H12TRF (X10SLE-F single node, Intel E3-1285L v3)

**SPECint\_rate2006 = 210**

**SPECint\_rate\_base2006 = 203**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jun-2013

**Hardware Availability:** Jun-2013

**Software Availability:** May-2013

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 16:37:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 July 2013.