



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®2006 = 45.2

Huawei CH242 (Intel Xeon E7-4807)

SPECfp_base2006 = 43.9

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Apr-2011

Software Availability: Nov-2013

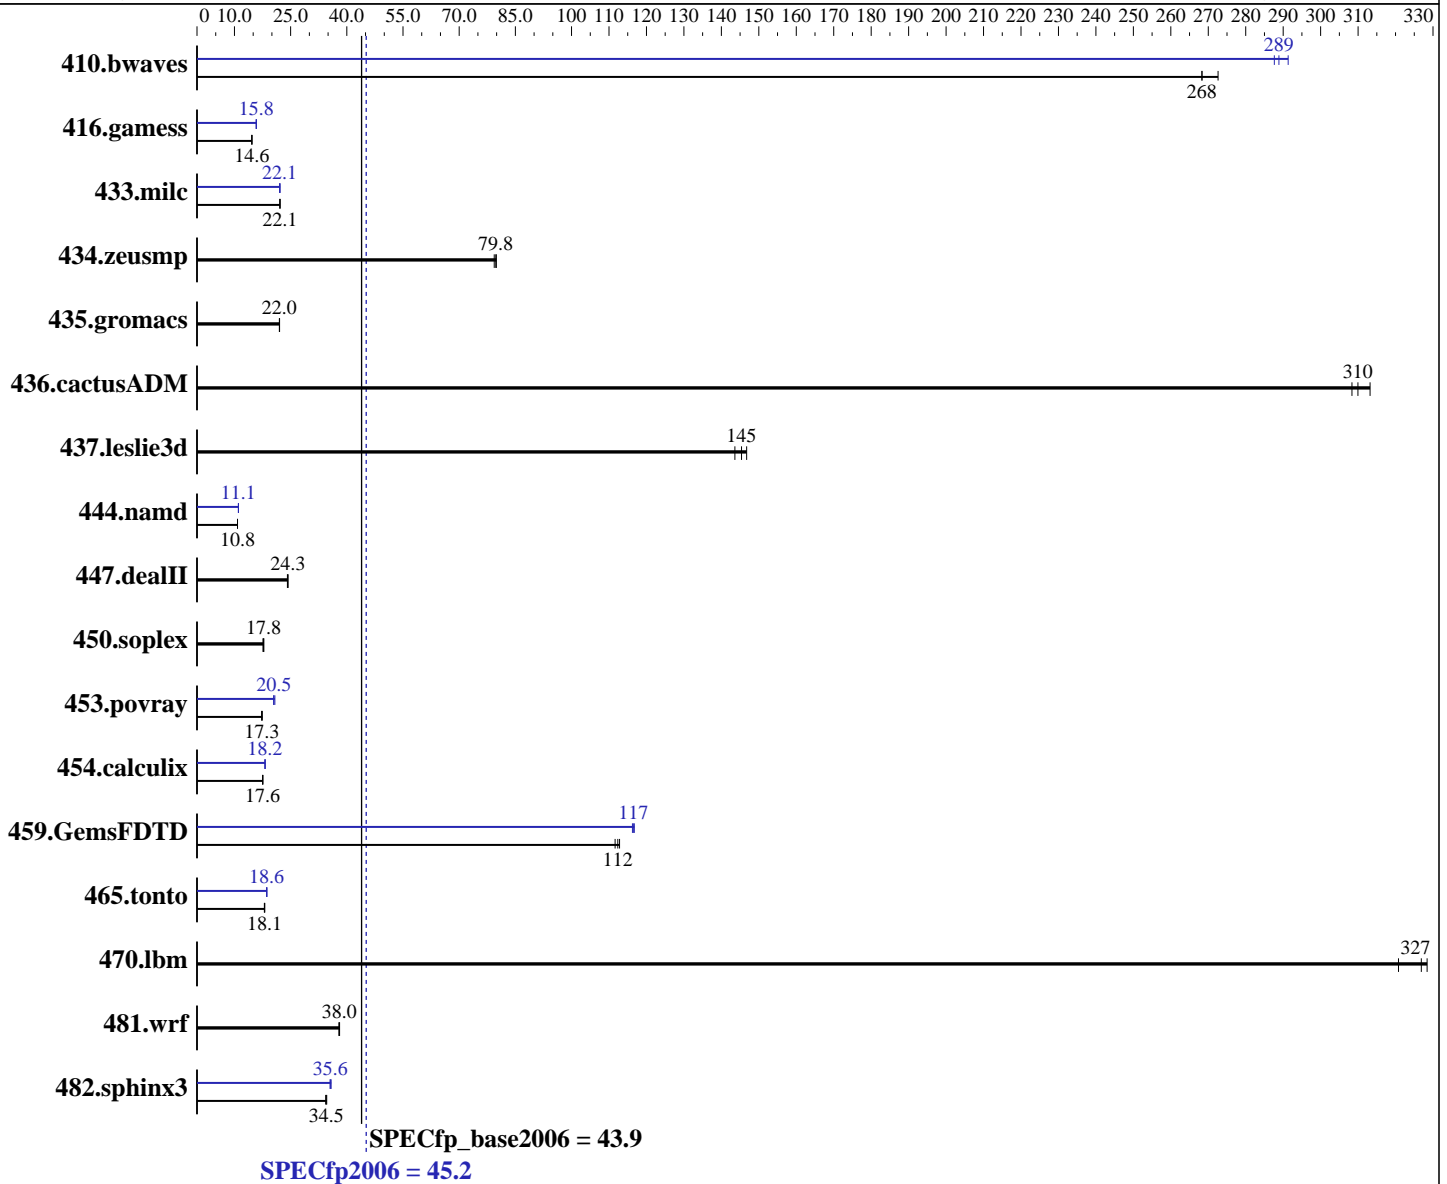

Hardware

CPU Name: Intel Xeon E7-4807
 CPU Characteristics:
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = **45.2**

Huawei CH242 (Intel Xeon E7-4807)

SPECfp_base2006 = **43.9**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Apr-2011

Software Availability: Nov-2013

L3 Cache: 18 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-10600R-09, ECC, running at 800 MHz)
 Disk Subsystem: 1 X 600 GB SAS 10000 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 49.9 | 273 | 50.6 | 268 | 50.6 | 268 | 46.6 | 291 | 47.0 | 289 | 47.2 | 288 |
| 416.gamess | 1337 | 14.6 | 1337 | 14.6 | 1336 | 14.7 | 1236 | 15.8 | 1237 | 15.8 | 1237 | 15.8 |
| 433.milc | 415 | 22.1 | 414 | 22.2 | 415 | 22.1 | 414 | 22.2 | 416 | 22.1 | 416 | 22.1 |
| 434.zeusmp | 114 | 79.9 | 114 | 79.8 | 115 | 79.4 | 114 | 79.9 | 114 | 79.8 | 115 | 79.4 |
| 435.gromacs | 324 | 22.0 | 324 | 22.0 | 324 | 22.0 | 324 | 22.0 | 324 | 22.0 | 324 | 22.0 |
| 436.cactusADM | 38.6 | 310 | 38.8 | 308 | 38.2 | 313 | 38.6 | 310 | 38.8 | 308 | 38.2 | 313 |
| 437.leslie3d | 65.5 | 144 | 64.1 | 147 | 64.7 | 145 | 65.5 | 144 | 64.1 | 147 | 64.7 | 145 |
| 444.namd | 741 | 10.8 | 742 | 10.8 | 742 | 10.8 | 725 | 11.1 | 725 | 11.1 | 725 | 11.1 |
| 447.dealII | 471 | 24.3 | 474 | 24.1 | 471 | 24.3 | 471 | 24.3 | 474 | 24.1 | 471 | 24.3 |
| 450.soplex | 473 | 17.6 | 469 | 17.8 | 467 | 17.8 | 473 | 17.6 | 469 | 17.8 | 467 | 17.8 |
| 453.povray | 305 | 17.4 | 307 | 17.3 | 308 | 17.3 | 259 | 20.5 | 256 | 20.8 | 260 | 20.5 |
| 454.calculix | 470 | 17.6 | 471 | 17.5 | 470 | 17.6 | 454 | 18.2 | 454 | 18.2 | 454 | 18.2 |
| 459.GemsFDTD | 94.4 | 112 | 95.0 | 112 | 94.0 | 113 | 91.1 | 117 | 91.3 | 116 | 90.9 | 117 |
| 465.tonto | 547 | 18.0 | 545 | 18.1 | 545 | 18.1 | 528 | 18.6 | 528 | 18.6 | 529 | 18.6 |
| 470.lbm | 42.8 | 321 | 42.0 | 327 | 41.8 | 328 | 42.8 | 321 | 42.0 | 327 | 41.8 | 328 |
| 481.wrf | 293 | 38.1 | 295 | 37.9 | 294 | 38.0 | 293 | 38.1 | 295 | 37.9 | 294 | 38.0 |
| 482.sphinx3 | 565 | 34.5 | 567 | 34.4 | 563 | 34.6 | 547 | 35.6 | 548 | 35.5 | 544 | 35.8 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
 Power Management = Maximum Performance (Default = Active Power Controller)
 Sysinfo program /spec/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Fri Aug 1 17:24:21 2014

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 45.2

Huawei CH242 (Intel Xeon E7-4807)

SPECfp_base2006 = 43.9

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Apr-2011

Software Availability: Nov-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E7- 4807 @ 1.87GHz
 4 "physical id"s (chips)
 24 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 6
siblings       : 6
physical 0:    : cores 0 1 2 18 24 25
physical 1:    : cores 0 8 9 16 17 25
physical 2:    : cores 0 1 2 18 24 25
physical 3:    : cores 0 8 9 16 17 25
```

cache size : 18432 KB

From /proc/meminfo

```
MemTotal:      264382684 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 1 05:16

SPEC is set to: /spec

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  547G  115G  404G  23% /
```

Additional information from dmidecode:

Memory:

32x RAMAXEL RMS6031EC64FAF1333 8 GB 800 MHz 2 rank

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | | |
|--|--------------------------|-------------|
| Huawei | SPECfp2006 = | 45.2 |
| Huawei CH242 (Intel Xeon E7-4807) | SPECfp_base2006 = | 43.9 |

| | |
|------------------------------|--|
| CPU2006 license: 3175 | Test date: Jul-2014 |
| Test sponsor: Huawei | Hardware Availability: Apr-2011 |
| Tested by: Huawei | Software Availability: Nov-2013 |

General Notes

Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,compact,0,1"
 LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
 -ansi-alias

C++ benchmarks:
 -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | | |
|--|--------------------------|-------------|
| Huawei | SPECfp2006 = | 45.2 |
| Huawei CH242 (Intel Xeon E7-4807) | SPECfp_base2006 = | 43.9 |

| | |
|------------------------------|--|
| CPU2006 license: 3175 | Test date: Jul-2014 |
| Test sponsor: Huawei | Hardware Availability: Apr-2011 |
| Tested by: Huawei | Software Availability: Nov-2013 |

Base Optimization Flags (Continued)

Fortran benchmarks:
 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
 -ansi-alias

Peak Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
 -parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | | |
|--|--------------------------|-------------|
| Huawei | SPECfp2006 = | 45.2 |
| Huawei CH242 (Intel Xeon E7-4807) | SPECfp_base2006 = | 43.9 |

| | |
|------------------------------|--|
| CPU2006 license: 3175 | Test date: Jul-2014 |
| Test sponsor: Huawei | Hardware Availability: Apr-2011 |
| Tested by: Huawei | Software Availability: Nov-2013 |

Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120912.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120912.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | | |
|-----------------------------------|-------------------|------|
| Huawei | SPECfp2006 = | 45.2 |
| Huawei CH242 (Intel Xeon E7-4807) | SPECfp_base2006 = | 43.9 |

CPU2006 license: 3175
 Test sponsor: Huawei
 Tested by: Huawei

Test date: Jul-2014
 Hardware Availability: Apr-2011
 Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
 For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
 Report generated on Wed Sep 24 16:18:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
 Originally published on 24 September 2014.