



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2643 v2, 3.50 GHz)

**SPECfp®\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 504**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: IBM Corporation

Test date: Oct-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

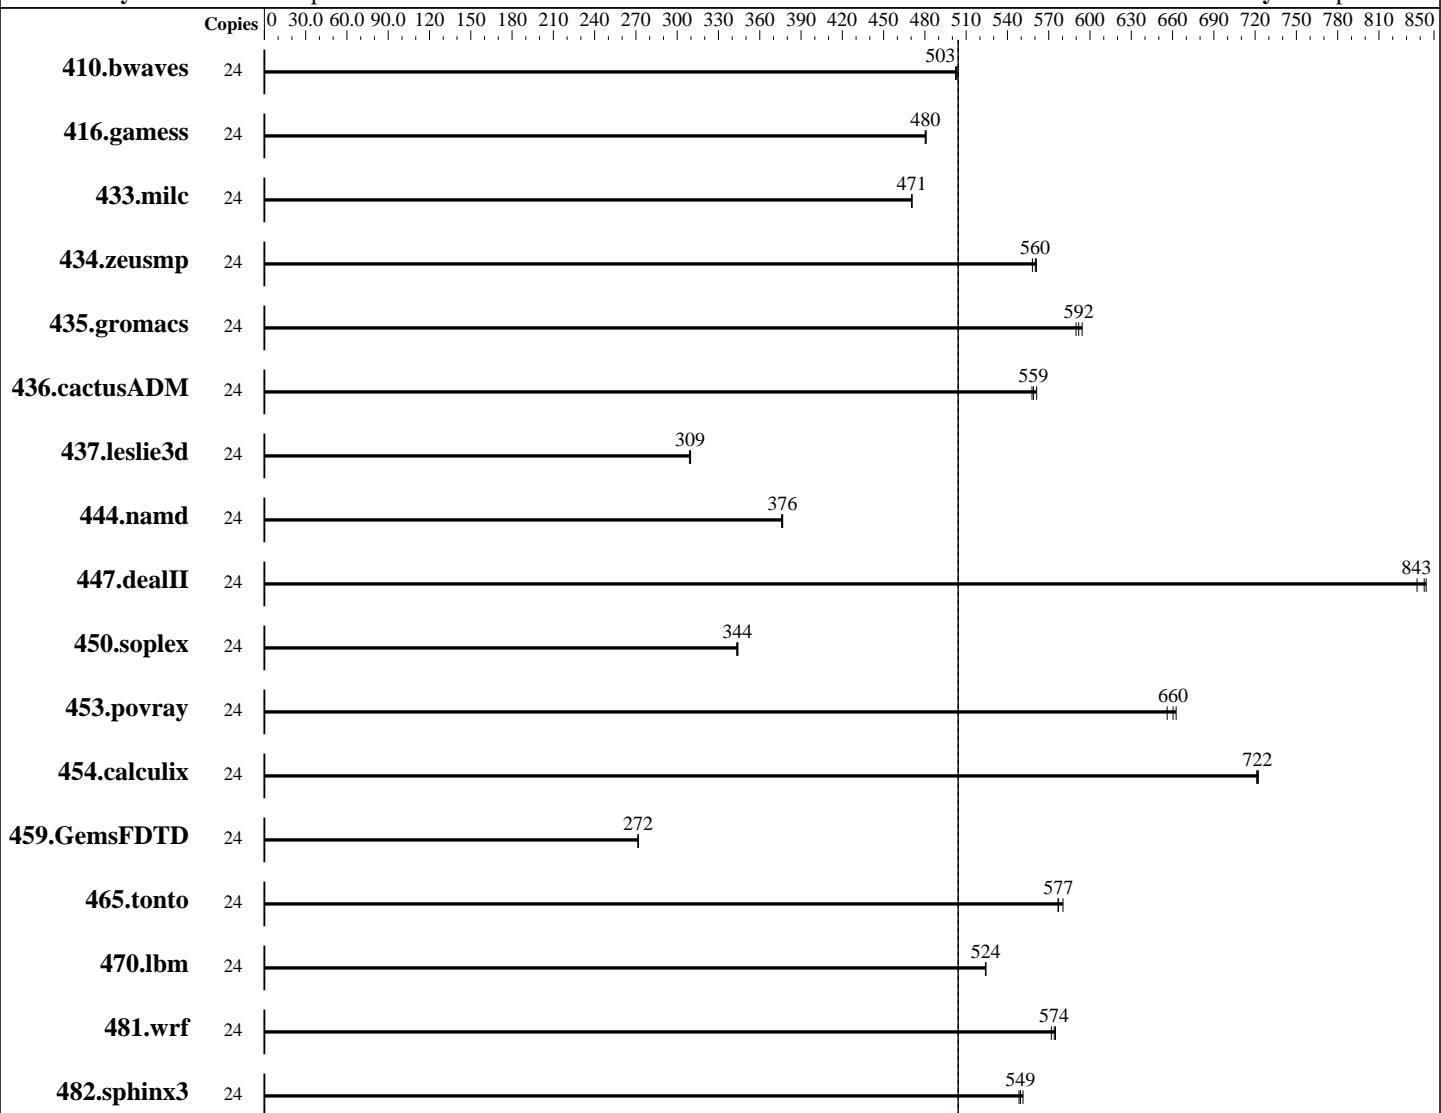

**SPECfp\_rate\_base2006 = 504**

**SPECfp\_rate2006 = 504**

### Hardware

CPU Name: Intel Xeon E5-2643 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
CPU MHz: 3500  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: 2.6.32-358.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2643 v2, 3.50 GHz)

**SPECfp\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 504**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Nov-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 2 x 250 GB SATA, 7200RPM, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<b>648</b>	<b>503</b>	648	503	649	502	24	<b>648</b>	<b>503</b>	648	503	649	502
416.gamess	24	977	481	978	480	<b>978</b>	<b>480</b>	24	977	481	978	480	<b>978</b>	<b>480</b>
433.milc	24	468	470	468	471	<b>468</b>	<b>471</b>	24	468	470	468	471	<b>468</b>	<b>471</b>
434.zeusmp	24	<b>390</b>	<b>560</b>	389	561	391	558	24	<b>390</b>	<b>560</b>	389	561	391	558
435.gromacs	24	288	594	<b>290</b>	<b>592</b>	291	590	24	288	594	<b>290</b>	<b>592</b>	291	590
436.cactusADM	24	511	561	<b>513</b>	<b>559</b>	514	558	24	511	561	<b>513</b>	<b>559</b>	514	558
437.leslie3d	24	<b>729</b>	<b>309</b>	728	310	730	309	24	<b>729</b>	<b>309</b>	728	310	730	309
444.namd	24	512	376	<b>511</b>	<b>376</b>	511	377	24	512	376	<b>511</b>	<b>376</b>	511	377
447.dealII	24	<b>326</b>	<b>843</b>	325	844	328	838	24	<b>326</b>	<b>843</b>	325	844	328	838
450.soplex	24	582	344	<b>582</b>	<b>344</b>	583	343	24	<b>582</b>	344	<b>582</b>	<b>344</b>	583	343
453.povray	24	<b>193</b>	<b>660</b>	195	656	193	663	24	<b>193</b>	<b>660</b>	195	656	193	663
454.calculix	24	274	722	275	721	<b>274</b>	<b>722</b>	24	274	722	275	721	<b>274</b>	<b>722</b>
459.GemsFDTD	24	<b>937</b>	<b>272</b>	937	272	938	271	24	<b>937</b>	<b>272</b>	937	272	938	271
465.tonto	24	409	577	407	580	<b>409</b>	<b>577</b>	24	409	577	407	580	<b>409</b>	<b>577</b>
470.lbm	24	<b>629</b>	<b>524</b>	629	524	629	524	24	<b>629</b>	<b>524</b>	629	524	629	524
481.wrf	24	469	572	466	575	<b>467</b>	<b>574</b>	24	469	572	466	575	<b>467</b>	<b>574</b>
482.sphinx3	24	848	551	853	548	<b>851</b>	<b>549</b>	24	848	551	853	548	<b>851</b>	<b>549</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Zone reclaim mode enabled with:

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:  
intel\_idle.max\_cstate=0



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2643 v2, 3.50 GHz)

**SPECfp\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 504**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Nov-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Platform Notes

BIOS setting:

```
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 #$ 654bd3fcf53b06faef0efe54ed011998
running on nx360M4 Tue Oct 14 00:59:03 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2643 v2 @ 3.50GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 6
        siblings : 12
        physical 0: cores 2 3 4 8 9 10
        physical 1: cores 2 3 4 8 9 10
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      132089100 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux nx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 13 14:23
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_nx360m4-lv_home
                  ext4   403G   14G  370G   4%  /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2643 v2, 3.50 GHz)

**SPECfp\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 504**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** IBM Corporation

**Test date:** Oct-2014

**Hardware Availability:** Nov-2013

**Software Availability:** Sep-2013

## Platform Notes (Continued)

BIOS IBM -[FHE107NUS-1.20]- 06/03/2014

Memory:

8x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1867 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/lib32:/home/SPECcpu-20140116-ic14.0/lib64:/home/SPECcpu-20140116-ic14.0/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2643 v2, 3.50 GHz)

**SPECfp\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 504**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** IBM Corporation

**Test date:** Oct-2014

**Hardware Availability:** Nov-2013

**Software Availability:** Sep-2013

## Base Portability Flags (Continued)

```
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2643 v2, 3.50 GHz)

**SPECfp\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 504**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** IBM Corporation

**Test date:** Oct-2014

**Hardware Availability:** Nov-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: basepeak = yes

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2643 v2, 3.50 GHz)

**SPECfp\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 504**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Nov-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:32:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 November 2014.