



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®\_rate2006 = 213

ProLiant DL320e Gen8v2  
(3.40 GHz, Intel Xeon E3-1231 v3)

SPECint\_rate\_base2006 = 205

CPU2006 license: 3


Test date: Apr-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2015

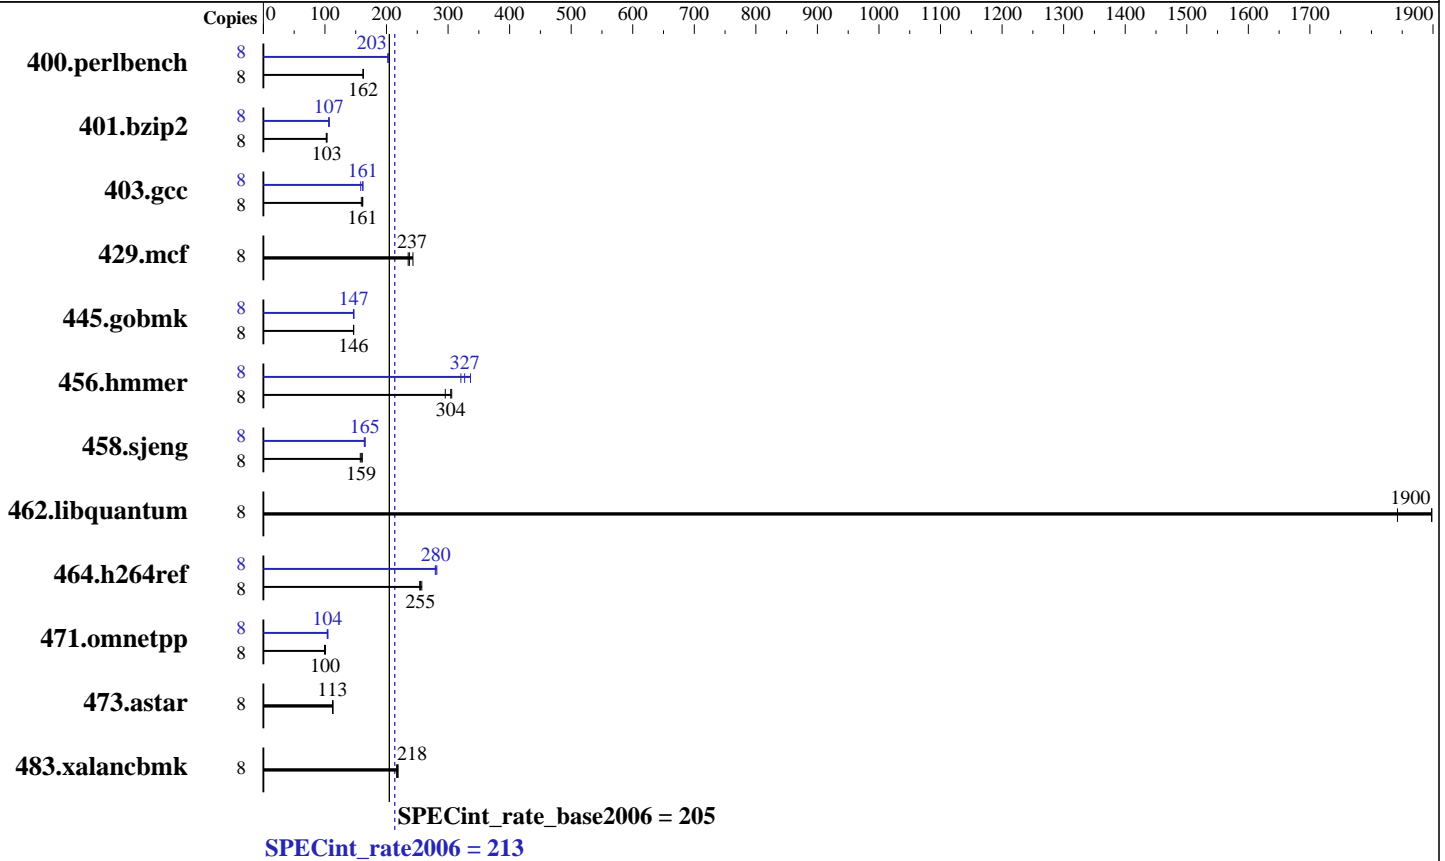

### Hardware

CPU Name: Intel Xeon E3-1231 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800E-11, ECC)  
 Disk Subsystem: 1 x 500 GB 7.2K RPM SATA, RAID 0  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Kernel 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 213

ProLiant DL320e Gen8v2  
(3.40 GHz, Intel Xeon E3-1231 v3)

SPECint\_rate\_base2006 = 205

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Apr-2015  
Hardware Availability: May-2014  
Software Availability: Sep-2015

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	481	163	<b><u>482</u></b>	<b><u>162</u></b>	483	162	8	<b><u>386</u></b>	<b><u>203</u></b>	386	203	386	202
401.bzip2	8	756	102	746	103	<b><u>751</u></b>	<b><u>103</u></b>	8	<b><u>725</u></b>	<b><u>107</u></b>	721	107	727	106
403.gcc	8	<b><u>400</u></b>	<b><u>161</u></b>	399	161	405	159	8	407	158	398	162	<b><u>399</u></b>	<b><u>161</u></b>
429.mcf	8	<b><u>308</u></b>	<b><u>237</u></b>	310	235	300	243	8	<b><u>308</u></b>	<b><u>237</u></b>	310	235	300	243
445.gobmk	8	573	146	<b><u>573</u></b>	<b><u>146</u></b>	571	147	8	571	147	<b><u>571</u></b>	<b><u>147</u></b>	574	146
456.hammer	8	244	306	253	295	<b><u>245</u></b>	<b><u>304</u></b>	8	222	336	233	321	<b><u>228</u></b>	<b><u>327</u></b>
458.sjeng	8	602	161	<b><u>609</u></b>	<b><u>159</u></b>	615	157	8	586	165	591	164	<b><u>587</u></b>	<b><u>165</u></b>
462.libquantum	8	87.3	1900	90.0	1840	<b><u>87.4</u></b>	<b><u>1900</u></b>	8	87.3	1900	90.0	1840	<b><u>87.4</u></b>	<b><u>1900</u></b>
464.h264ref	8	<b><u>693</u></b>	<b><u>255</u></b>	688	257	697	254	8	634	279	628	282	<b><u>632</u></b>	<b><u>280</u></b>
471.omnetpp	8	503	99.3	496	101	<b><u>498</u></b>	<b><u>100</u></b>	8	477	105	482	104	<b><u>479</u></b>	<b><u>104</u></b>
473.astar	8	499	112	497	113	<b><u>499</u></b>	<b><u>113</u></b>	8	499	112	497	113	<b><u>499</u></b>	<b><u>113</u></b>
483.xalancbmk	8	255	216	252	219	<b><u>253</u></b>	<b><u>218</u></b>	8	255	216	252	219	<b><u>253</u></b>	<b><u>218</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches

### Platform Notes

BIOS Configuration:  
HP Power Regulator set to HP Static High Performance Mode  
Thermal Configuration set to Maximum Cooling  
Minimum Processor Idle Power Core State set to C6 State  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh  
Sysinfo program /root/spec/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Wed Apr 15 10:07:41 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 213

ProLiant DL320e Gen8v2  
(3.40 GHz, Intel Xeon E3-1231 v3)

SPECint\_rate\_base2006 = 205

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Apr-2015  
**Hardware Availability:** May-2014  
**Software Availability:** Sep-2015

### Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1231 v3 @ 3.40GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
 cache size : 8192 KB

```

```

From /proc/meminfo
MemTotal:      32740012 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 15 10:06

```

SPEC is set to: /root/spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   50G   27G   24G   53% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

BIOS HP P80 03/28/2014
Memory:
4x HP 669239-081 8 GB 2 rank 1600 MHz

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 213

ProLiant DL320e Gen8v2  
(3.40 GHz, Intel Xeon E3-1231 v3)

SPECint\_rate\_base2006 = 205

CPU2006 license: 3

Test date: Apr-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2015

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/spec/libs/32:/root/spec/libs/64:/root/spec/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB  
memory using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 213**

ProLiant DL320e Gen8v2  
(3.40 GHz, Intel Xeon E3-1231 v3)

**SPECint\_rate\_base2006 = 205**

**CPU2006 license:** 3

**Test date:** Apr-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2015

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 213**

ProLiant DL320e Gen8v2  
(3.40 GHz, Intel Xeon E3-1231 v3)

**SPECint\_rate\_base2006 = 205**

**CPU2006 license:** 3

**Test date:** Apr-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2015

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue May 5 15:16:14 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 May 2015.