SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E2, Intel Xeon E7-8890 v3, 2.50 GHz

SPECfp®_rate2006 = 3910

SPECfp_rate_base2006 = 3850

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2015
Hardware Availability: May-2015
Software Availability: Mar-2015

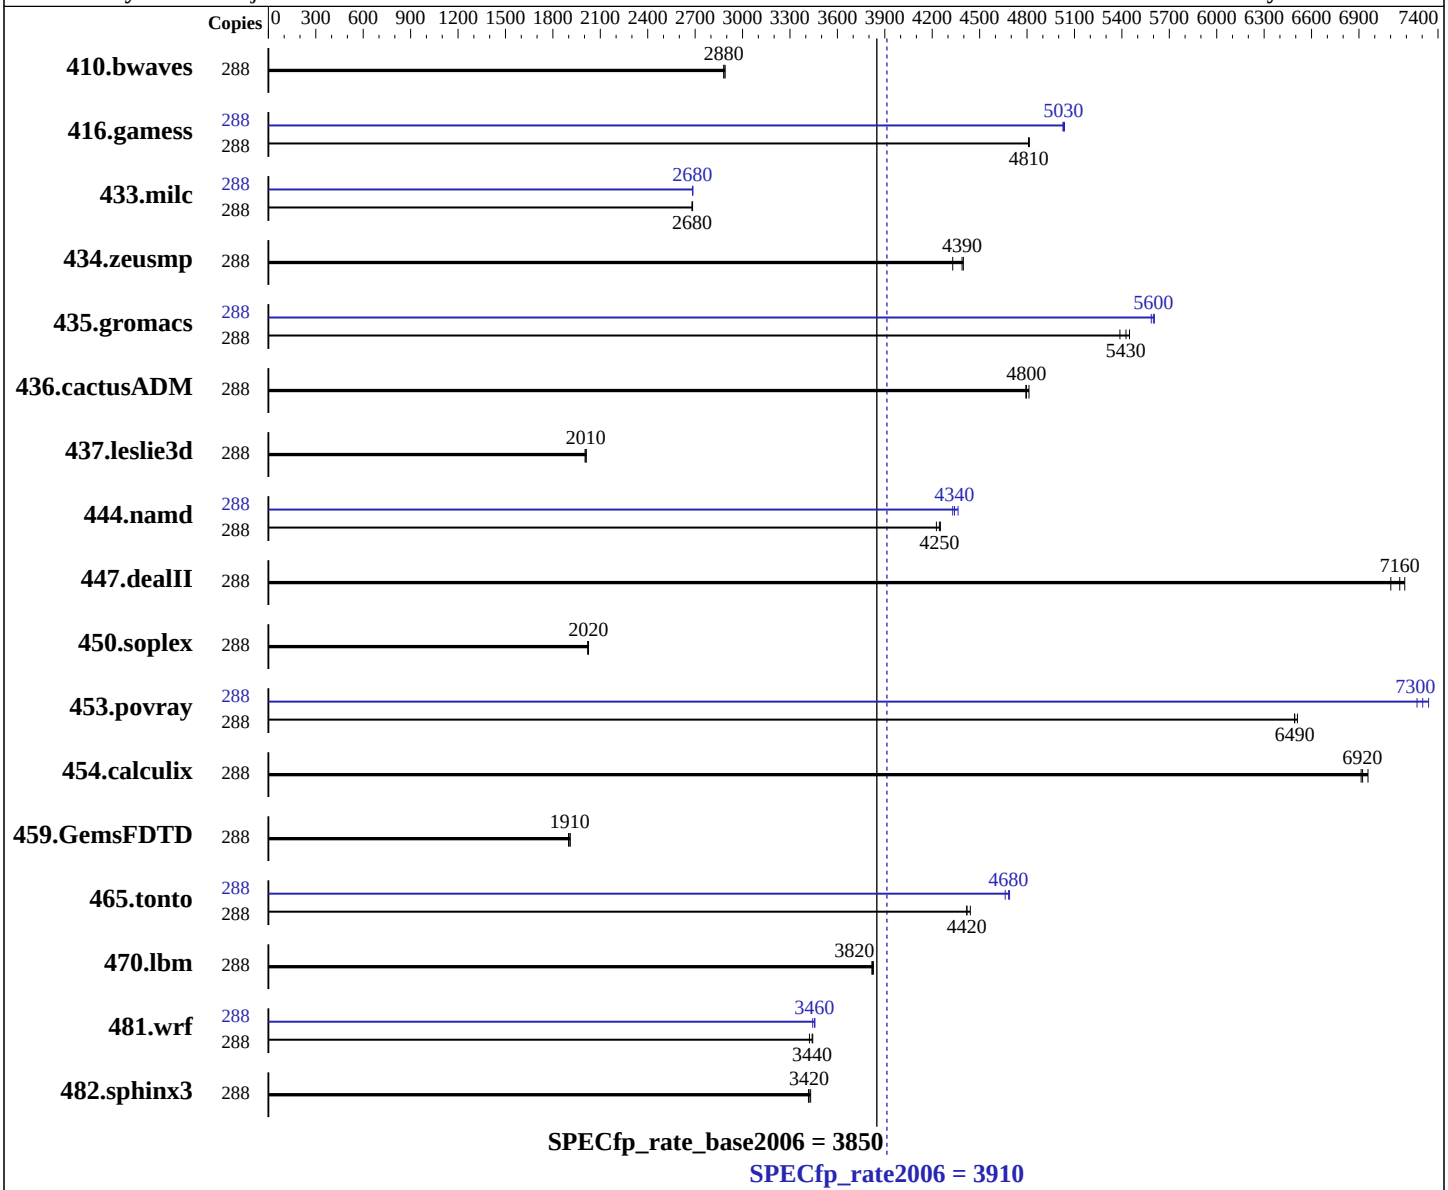

Hardware

CPU Name:	Intel Xeon E7-8890 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	144 cores, 8 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,4,6,8 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.1 (Maipo) 3.10.0-229.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E2, Intel Xeon E7-8890 v3, 2.50 GHz

SPECfp_rate2006 = 3910

SPECfp_rate_base2006 = 3850

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2015
Hardware Availability: May-2015
Software Availability: Mar-2015

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 2 TB (128 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 2 x SATA, 600 GB, 10000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	288	**1358**	**2880**	1358	2880	1354	2890	288	**1358**	**2880**	1358	2880	1354	2890
416.gamess	288	**1172**	**4810**	1171	4810	1173	4810	288	1122	5030	**1121**	**5030**	1120	5040
433.milc	288	986	2680	**986**	**2680**	985	2680	288	985	2690	**985**	**2680**	985	2680
434.zeusmp	288	**597**	**4390**	596	4400	605	4330	288	**597**	**4390**	596	4400	605	4330
435.gromacs	288	**379**	**5430**	382	5390	377	5450	288	367	5610	**367**	**5600**	368	5590
436.cactusADM	288	**718**	**4800**	715	4810	718	4790	288	**718**	**4800**	715	4810	718	4790
437.leslie3d	288	**1348**	**2010**	1351	2000	1346	2010	288	**1348**	**2010**	1351	2000	1346	2010
444.namd	288	543	4250	**544**	**4250**	547	4230	288	529	4360	533	4330	**532**	**4340**
447.dealII	288	458	7190	464	7100	**460**	**7160**	288	458	7190	464	7100	**460**	**7160**
450.soplex	288	1189	2020	**1186**	**2020**	1186	2030	288	1189	2020	**1186**	**2020**	1186	2030
453.povray	288	235	6510	236	6490	**236**	**6490**	288	**210**	**7300**	211	7270	209	7340
454.calculix	288	342	6960	344	6910	**343**	**6920**	288	342	6960	344	6910	**343**	**6920**
459.GemsFDTD	288	1609	1900	1600	1910	**1602**	**1910**	288	1609	1900	1600	1910	**1602**	**1910**
465.tonto	288	**641**	**4420**	641	4420	638	4440	288	604	4690	**605**	**4680**	608	4660
470.lbm	288	**1035**	**3820**	1036	3820	1034	3830	288	**1035**	**3820**	1036	3820	1034	3830
481.wrf	288	940	3420	934	3440	**935**	**3440**	288	930	3460	**931**	**3460**	934	3440
482.sphinx3	288	1643	3420	**1641**	**3420**	1636	3430	288	1643	3420	**1641**	**3420**	1636	3430

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Energy Performance = Performance
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>

 For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
      470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32`

470.lbm: `basepeak = yes`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 2 13:45:40 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 June 2015.