



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint\_rate2006 = 1370**

Express5800/B120f-h (Intel Xeon E5-2699 v3)

**SPECint\_rate\_base2006 = 1320**

**CPU2006 license:** 9006


**Test date:** Jul-2015

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jun-2015

**Tested by:** NEC Corporation

**Software Availability:** Oct-2014

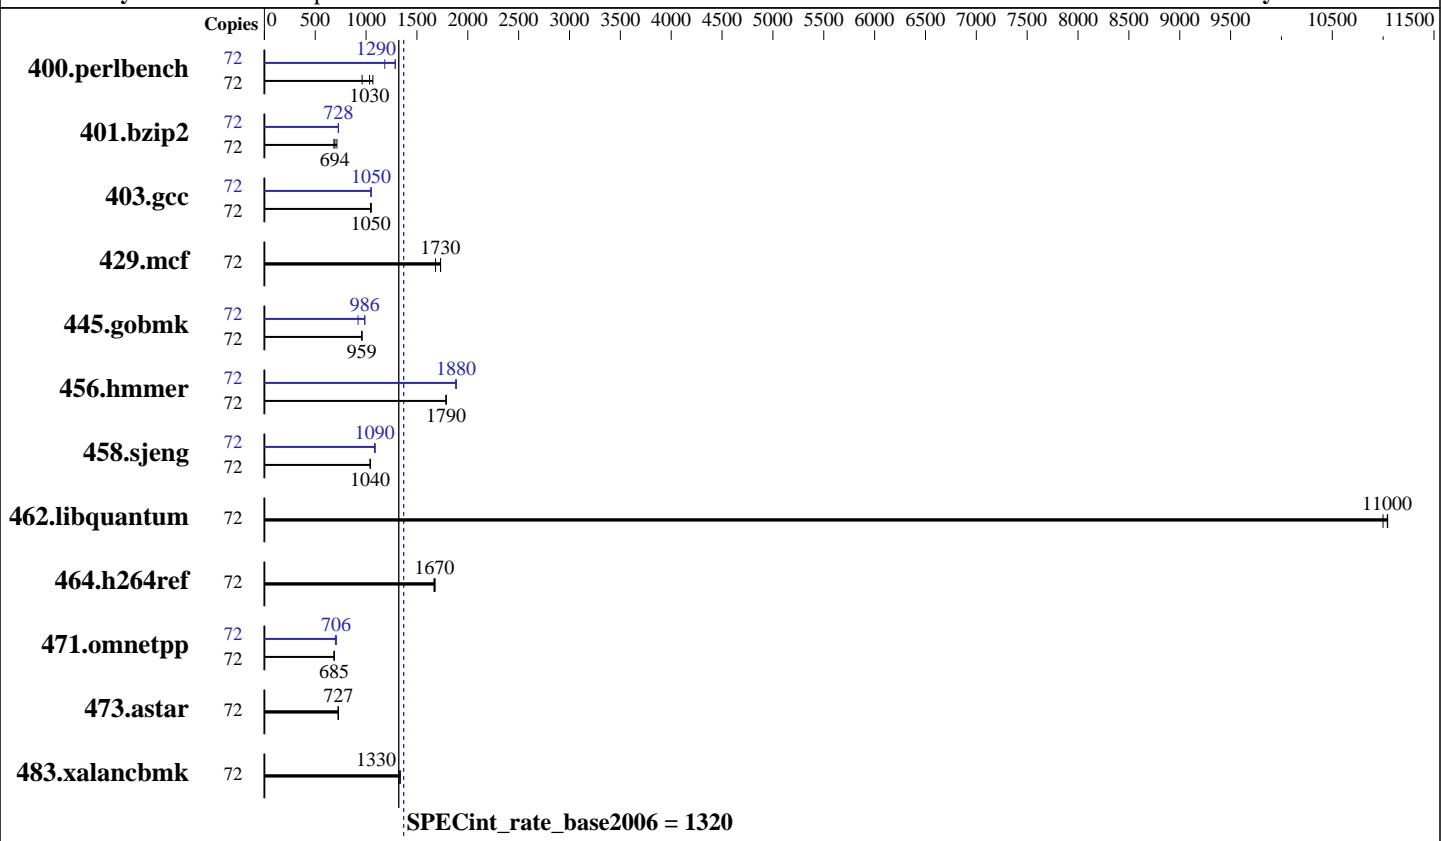

## Hardware

CPU Name: Intel Xeon E5-2699 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: NEC Storage M100 via Fibre Channel  
 (See additional details below)  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)  
 Compiler: Kernel 2.6.32-504.el6.x86\_64  
 C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/B120f-h (Intel Xeon E5-2699 v3)

**SPECint\_rate2006 = 1370**

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Jun-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	659	1070	<b>680</b>	<b>1030</b>	732	961	72	<b>547</b>	<b>1290</b>	594	1180	<b>546</b>	1290
401.bzip2	72	974	713	1016	684	<b>1001</b>	<b>694</b>	72	<b>954</b>	<b>728</b>	953	729	<b>957</b>	726
403.gcc	72	<b>554</b>	<b>1050</b>	551	1050	555	1040	72	<b>553</b>	<b>1050</b>	<b>552</b>	<b>1050</b>	<b>552</b>	1050
429.mcf	72	390	1680	<b>379</b>	<b>1730</b>	379	1730	72	390	1680	<b>379</b>	<b>1730</b>	379	1730
445.gobmk	72	788	959	<b>788</b>	<b>959</b>	788	958	72	<b>766</b>	<b>986</b>	765	988	820	921
456.hammer	72	376	1790	<b>376</b>	<b>1790</b>	376	1790	72	357	1880	356	1890	<b>357</b>	<b>1880</b>
458.sjeng	72	838	1040	<b>837</b>	<b>1040</b>	836	1040	72	800	1090	<b>801</b>	<b>1090</b>	805	1080
462.libquantum	72	<b>135</b>	<b>11000</b>	135	11000	136	11000	72	<b>135</b>	<b>11000</b>	135	11000	136	11000
464.h264ref	72	949	1680	<b>952</b>	<b>1670</b>	955	1670	72	949	1680	<b>952</b>	<b>1670</b>	955	1670
471.omnetpp	72	<b>657</b>	<b>685</b>	657	685	653	690	72	<b>645</b>	<b>698</b>	<b>637</b>	<b>706</b>	637	707
473.astar	72	697	725	<b>695</b>	<b>727</b>	695	727	72	697	725	<b>695</b>	<b>727</b>	695	727
483.xalancbmk	72	<b>373</b>	<b>1330</b>	377	1320	372	1340	72	<b>373</b>	<b>1330</b>	377	1320	372	1340

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Energy Performance: Performance

Patrol Scrub: Disabled

Cluster on Die: Enabled

Storage Configuration for Disk Subsystem:

NEC Storage M100 has 4 x 600 GB 10000 RPM SAS disks under RAID-10 configuration mounted over 8Gbps Fibre Channel interface with these options "defaults" in the /etc/fstab.

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B120f-h (Intel Xeon E5-2699 v3)

**SPECint\_rate2006 = 1370**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

## General Notes (Continued)

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f-h (Intel Xeon E5-2699 v3)

**SPECint\_rate2006 = 1370**

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Jun-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hammer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hammer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hammer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120f-h (Intel Xeon E5-2699 v3)

**SPECint\_rate2006 = 1370**

**SPECint\_rate\_base2006 = 1320**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Oct-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120f-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 25 17:52:49 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 August 2015.