



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Dell Inc.

SPECfp<sup>®</sup>2006 = **119**

PowerEdge T630 (Intel Xeon E5-2698 v4, 2.20 GHz)

SPECfp\_base2006 = **113**

CPU2006 license: 55


Test date: Dec-2015

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

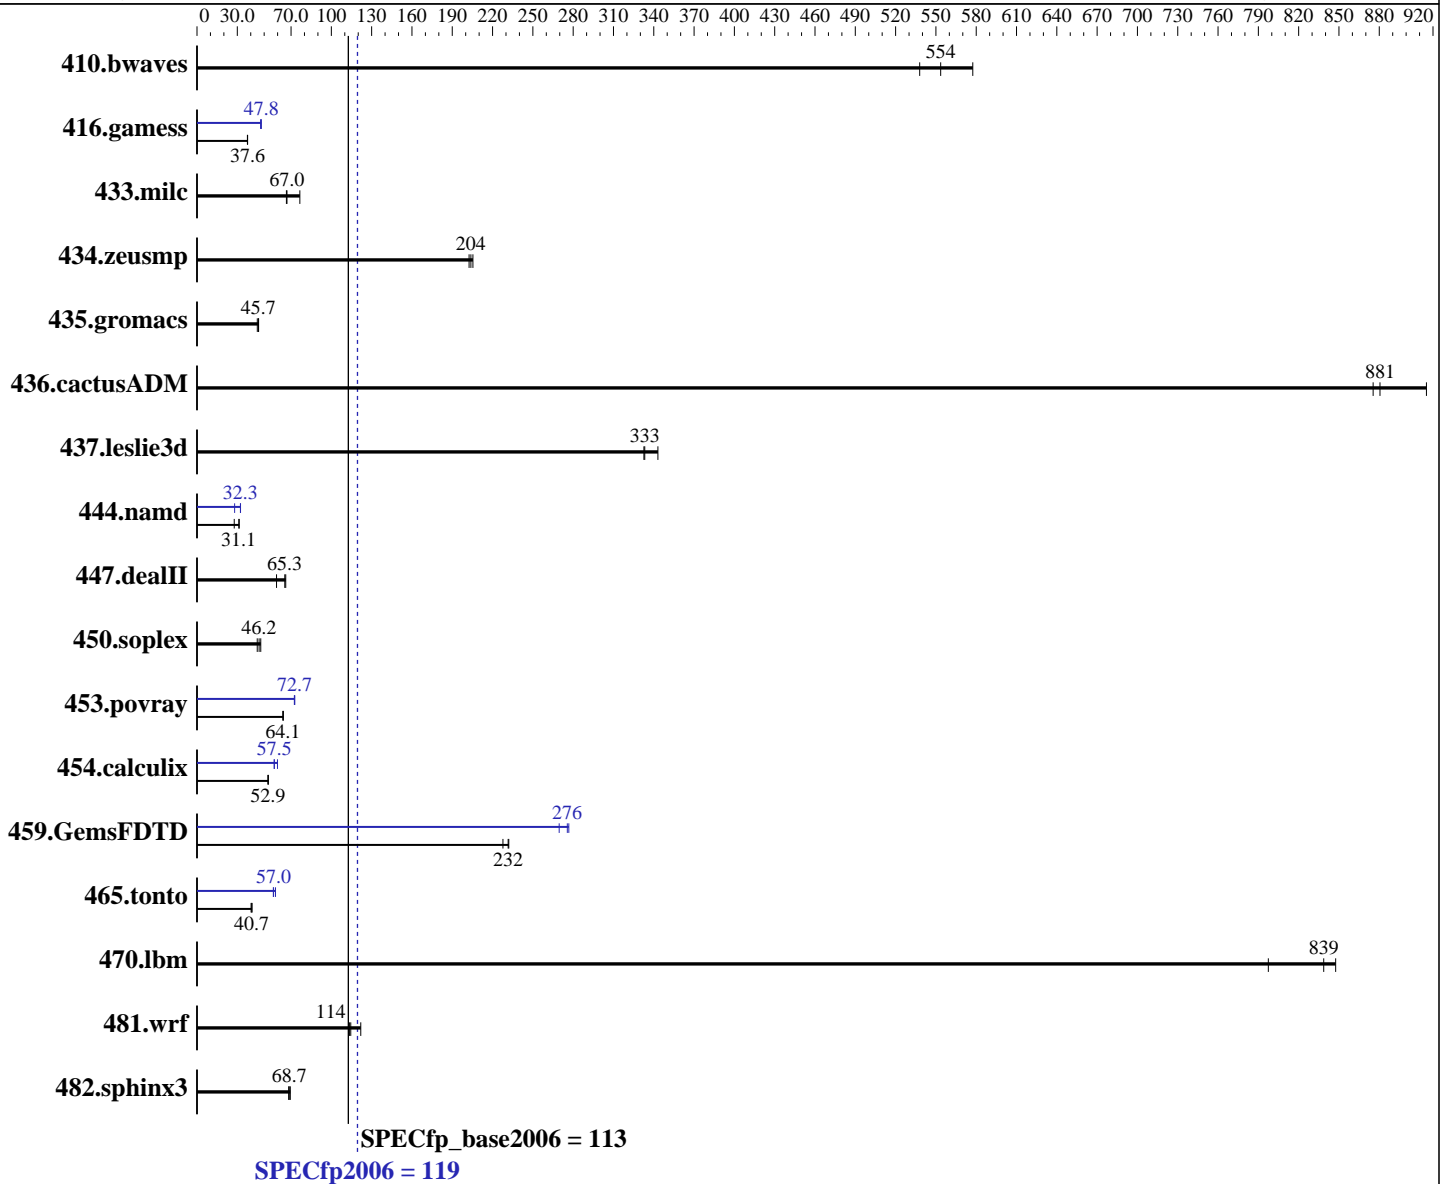

### Hardware

CPU Name: Intel Xeon E5-2698 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 2 chips, 20 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 119

PowerEdge T630 (Intel Xeon E5-2698 v4, 2.20 GHz)

SPECfp\_base2006 = 113

CPU2006 license: 55

Test date: Dec-2015

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

L3 Cache: 50 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	25.3	538	<b><u>24.6</u></b>	<b><u>554</u></b>	23.5	577	25.3	538	<b><u>24.6</u></b>	<b><u>554</u></b>	23.5	577
416.gamess	<b><u>521</u></b>	<b><u>37.6</u></b>	520	37.7	522	37.5	410	47.8	<b><u>410</u></b>	<b><u>47.8</u></b>	413	47.4
433.milc	120	76.6	<b><u>137</u></b>	<b><u>67.0</u></b>	138	66.6	120	76.6	<b><u>137</u></b>	<b><u>67.0</u></b>	138	66.6
434.zeusmp	44.9	203	44.3	205	<b><u>44.6</u></b>	<b><u>204</u></b>	44.9	203	44.3	205	<b><u>44.6</u></b>	<b><u>204</u></b>
435.gromacs	159	44.9	156	45.9	<b><u>156</u></b>	<b><u>45.7</u></b>	159	44.9	156	45.9	<b><u>156</u></b>	<b><u>45.7</u></b>
436.cactusADM	13.1	915	<b><u>13.6</u></b>	<b><u>881</u></b>	13.7	875	13.1	915	<b><u>13.6</u></b>	<b><u>881</u></b>	13.7	875
437.leslie3d	27.4	343	<b><u>28.2</u></b>	<b><u>333</u></b>	28.3	333	27.4	343	<b><u>28.2</u></b>	<b><u>333</u></b>	28.3	333
444.namd	255	31.4	289	27.7	<b><u>258</u></b>	<b><u>31.1</u></b>	<b><u>248</u></b>	<b><u>32.3</u></b>	248	32.4	286	28.0
447.dealII	<b><u>175</u></b>	<b><u>65.3</u></b>	193	59.2	173	66.1	<b><u>175</u></b>	<b><u>65.3</u></b>	193	59.2	173	66.1
450.soplex	176	47.5	186	44.8	<b><u>180</u></b>	<b><u>46.2</u></b>	176	47.5	186	44.8	<b><u>180</u></b>	<b><u>46.2</u></b>
453.povray	83.2	64.0	82.9	64.2	<b><u>83.0</u></b>	<b><u>64.1</u></b>	73.4	72.5	73.2	72.7	<b><u>73.2</u></b>	<b><u>72.7</u></b>
454.calculix	156	52.9	<b><u>156</u></b>	<b><u>52.9</u></b>	156	53.0	<b><u>143</u></b>	<b><u>57.5</u></b>	144	57.5	138	59.9
459.GemsFDTD	<b><u>45.8</u></b>	<b><u>232</u></b>	45.7	232	46.6	228	38.3	277	39.4	270	<b><u>38.5</u></b>	<b><u>276</u></b>
465.tonto	244	40.3	<b><u>242</u></b>	<b><u>40.7</u></b>	240	40.9	168	58.4	<b><u>173</u></b>	<b><u>57.0</u></b>	173	56.8
470.lbm	17.2	797	<b><u>16.4</u></b>	<b><u>839</u></b>	16.2	848	17.2	797	<b><u>16.4</u></b>	<b><u>839</u></b>	16.2	848
481.wrf	98.5	113	<b><u>97.6</u></b>	<b><u>114</u></b>	91.6	122	98.5	113	<b><u>97.6</u></b>	<b><u>114</u></b>	91.6	122
482.sphinx3	281	69.4	286	68.2	<b><u>284</u></b>	<b><u>68.7</u></b>	281	69.4	286	68.2	<b><u>284</u></b>	<b><u>68.7</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
 Snoop Mode set to Home Snoop  
 Virtualization Technology disabled  
 System Profile set to Performance  
 Memory Patrol Scrub disabled  
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914  
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
 running on localhost.localdomain Mon Dec 14 22:25:04 2015

This section contains SUT (System Under Test) info as seen by  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 119

PowerEdge T630 (Intel Xeon E5-2698 v4, 2.20 GHz)

SPECfp\_base2006 = 113

CPU2006 license: 55

Test date: Dec-2015

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2698 v4 @ 2.20GHz
 2 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 20
siblings : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size : 51200 KB

```

```

From /proc/meminfo
MemTotal:      528283000 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Dec 14 17:26

```

SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   235G  9.6G  225G   5% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.7.11 12/07/2015

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 119

PowerEdge T630 (Intel Xeon E5-2698 v4, 2.20 GHz)

SPECfp\_base2006 = 113

CPU2006 license: 55

Test date: Dec-2015

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Platform Notes (Continued)

Memory:

16x 00CE00B300CE M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz  
8x Not Specified Not Specified

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"  
OMP\_NUM\_THREADS = "40"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB  
memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 119

PowerEdge T630 (Intel Xeon E5-2698 v4, 2.20 GHz)

SPECfp\_base2006 = 113

CPU2006 license: 55

Test date: Dec-2015

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
 -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
 -ansi-alias

C++ benchmarks:  
 -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
 -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
 -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
 -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
 icc -m64

C++ benchmarks:  
 icpc -m64

Fortran benchmarks:  
 ifort -m64

Benchmarks using both Fortran and C:  
 icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 119

PowerEdge T630 (Intel Xeon E5-2698 v4, 2.20 GHz)

SPECfp\_base2006 = 113

CPU2006 license: 55

Test date: Dec-2015

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 119

PowerEdge T630 (Intel Xeon E5-2698 v4, 2.20 GHz)

SPECfp\_base2006 = 113

CPU2006 license: 55

Test date: Dec-2015

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Apr 5 14:54:32 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 April 2016.