



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = Not Run

PowerEdge R440 (Intel Xeon Bronze 3106, 1.70 GHz)

SPECint_base2006 = 36.7

CPU2006 license: 55


Test date: Aug-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Apr-2017

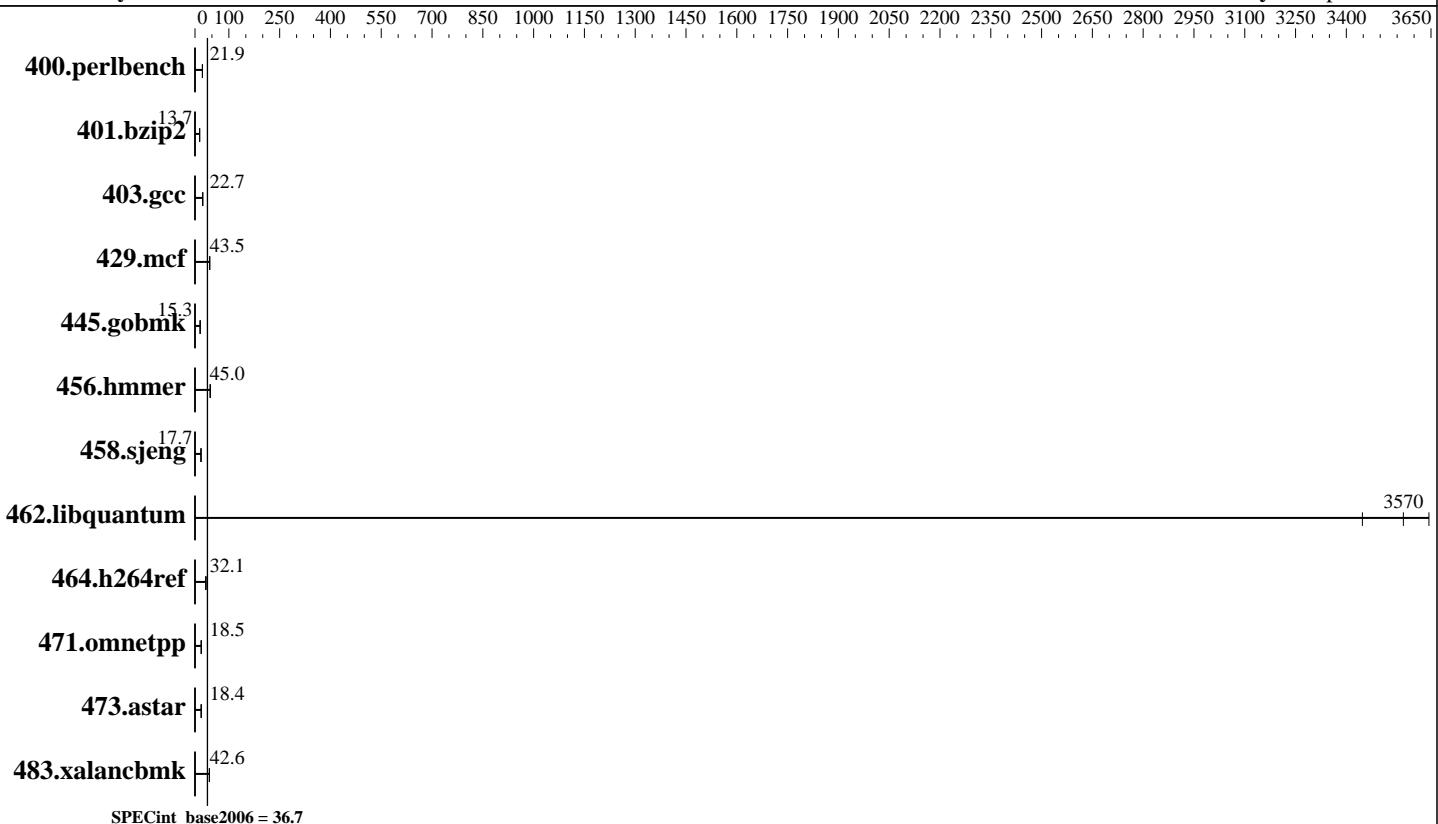

Hardware		Software
CPU Name:	Intel Xeon Bronze 3106	Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
CPU Characteristics:		Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
CPU MHz:	1700	Auto Parallel: Yes
FPU:	Integrated	File System: xfs
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip	System State: Run level 3 (multi-user)
CPU(s) orderable:	1,2 chip	Base Pointers: 32/64-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers: 32/64-bit
Secondary Cache:	1 MB I+D on chip per core	Other Software: Microquill SmartHeap V10.2
L3 Cache:	11 MB I+D on chip per chip	
Other Cache:	None	
Memory:	192 GB (12 x 16 GB 2Rx8 PC4-2666V-R, running at 2133 MT/s)	
Disk Subsystem:	1 x 1 TB SATA 7200 RPM	
Other Hardware:	None	



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = Not Run

PowerEdge R440 (Intel Xeon Bronze 3106, 1.70 GHz)

SPECint_base2006 = 36.7

CPU2006 license: 55

Test date: Aug-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Apr-2017

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	446	<u>21.9</u>	447	21.9	444	22.0						
401.bzip2	705	<u>13.7</u>	706	13.7	705	13.7						
403.gcc	354	22.7	353	22.8	354	<u>22.7</u>						
429.mcf	213	42.8	209	43.6	209	<u>43.5</u>						
445.gobmk	687	15.3	687	<u>15.3</u>	688	15.3						
456.hmmer	207	<u>45.0</u>	207	45.0	207	45.0						
458.sjeng	682	<u>17.7</u>	683	17.7	682	17.7						
462.libquantum	5.69	3640	6.01	3450	5.81	<u>3570</u>						
464.h264ref	690	32.1	690	<u>32.1</u>	691	32.0						
471.omnetpp	338	<u>18.5</u>	340	18.4	337	18.5						
473.astar	381	18.4	382	<u>18.4</u>	382	18.4						
483.xalancbmk	162	42.6	162	42.5	162	<u>42.6</u>						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Sub NUMA Cluster disabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Energy Efficient Turbo disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /root/cpu2006-1.2_ic17u3/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-vw3y Thu Aug 10 19:06:03 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3106 CPU @ 1.70GHz

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = Not Run

PowerEdge R440 (Intel Xeon Bronze 3106, 1.70 GHz)

SPECint_base2006 = 36.7

CPU2006 license: 55

Test date: Aug-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Apr-2017

Platform Notes (Continued)

```
2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings   : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 11264 KB

From /proc/meminfo
MemTotal:      197458260 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
 SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or
  release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-vw3y 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 8 19:54

SPEC is set to: /root/cpu2006-1.2_ic17u3
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda3        xfs   923G  9.2G  913G   1% /
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = Not Run

PowerEdge R440 (Intel Xeon Bronze 3106, 1.70 GHz)

SPECint_base2006 = 36.7

CPU2006 license: 55

Test date: Aug-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Apr-2017

Platform Notes (Continued)

BIOS Dell Inc. 0.4.2 07/21/2017

Memory:

12x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz, configured at 2133 MHz

4x Not Specified Not Specified

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/root/cpu2006-1.2_ic17u3/lib/ia32:/root/cpu2006-1.2_ic17u3/lib/intel64:/root/cpu2006-1.2_ic17u3/sh10.2"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = Not Run

PowerEdge R440 (Intel Xeon Bronze 3106, 1.70 GHz)

SPECint_base2006 = 36.7

CPU2006 license: 55

Test date: Aug-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Apr-2017

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
-auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 20 11:03:00 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2017.