



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECfp®\_rate2006 = 1520**

**SPECfp\_rate\_base2006 = 1490**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

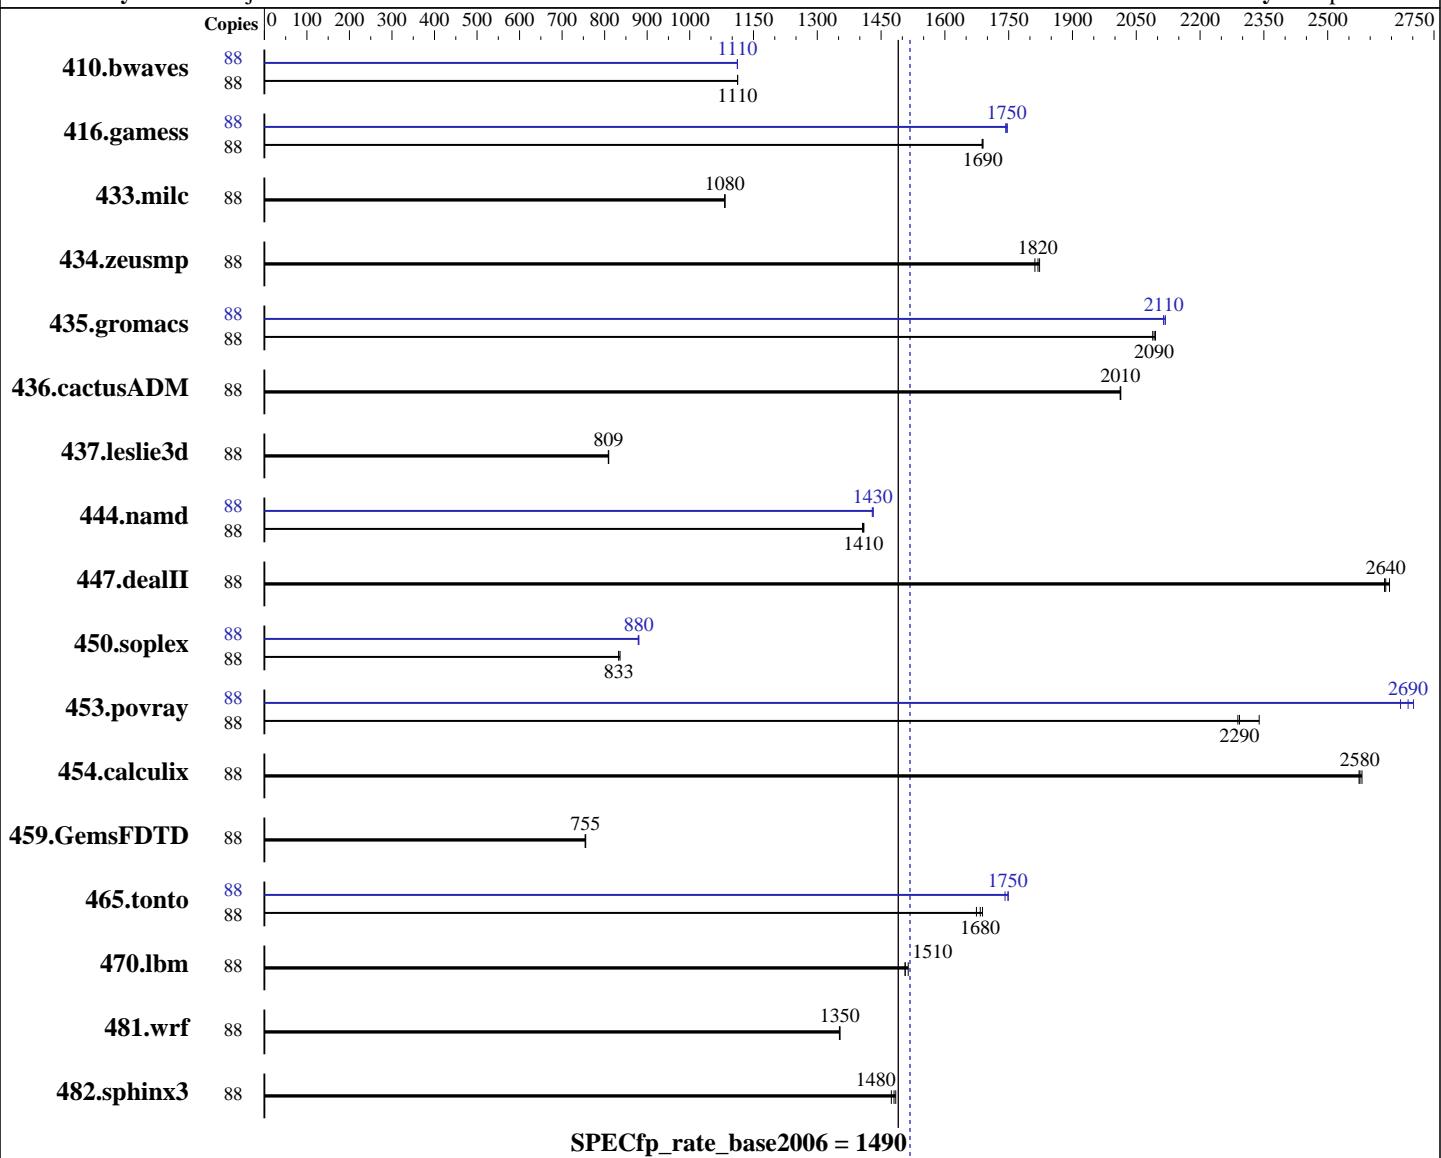

**SPECfp\_rate\_base2006 = 1490**

**SPECfp\_rate2006 = 1520**

## Hardware

CPU Name: Intel Xeon Gold 6152  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: tmpfs  
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECfp\_rate2006 = 1520**

**SPECfp\_rate\_base2006 = 1490**

**CPU2006 license:** 19

**Test date:** Aug-2017

**Test sponsor:** Fujitsu

**Hardware Availability:** Jul-2017

**Tested by:** Fujitsu

**Software Availability:** Apr-2017

L3 Cache: 30.25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)  
 Disk Subsystem: 752 GB tmpfs  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88	1075	1110	<b>1075</b>	<b>1110</b>	1075	1110	88	1075	1110	<b>1075</b>	<b>1110</b>	1075	1110
416.gamess	88	<b>1020</b>	<b>1690</b>	1020	1690	1021	1690	88	986	1750	<b>987</b>	<b>1750</b>	989	1740
433.milc	88	746	1080	746	1080	<b>746</b>	<b>1080</b>	88	746	1080	746	1080	<b>746</b>	<b>1080</b>
434.zeusmp	88	<b>440</b>	<b>1820</b>	439	1820	442	1810	88	<b>440</b>	<b>1820</b>	439	1820	442	1810
435.gromacs	88	<b>300</b>	<b>2090</b>	301	2090	300	2100	88	297	2120	<b>297</b>	<b>2110</b>	297	2110
436.cactusADM	88	522	2010	523	2010	<b>522</b>	<b>2010</b>	88	522	2010	523	2010	<b>522</b>	<b>2010</b>
437.leslie3d	88	1023	809	1022	809	<b>1022</b>	<b>809</b>	88	1023	809	1022	809	<b>1022</b>	<b>809</b>
444.namd	88	<b>501</b>	<b>1410</b>	502	1410	501	1410	88	494	1430	<b>493</b>	<b>1430</b>	493	1430
447.dealII	88	382	2630	381	2650	<b>382</b>	<b>2640</b>	88	382	2630	381	2650	<b>382</b>	<b>2640</b>
450.soplex	88	<b>881</b>	<b>833</b>	881	833	878	836	88	834	880	<b>834</b>	<b>880</b>	835	879
453.povray	88	205	2290	<b>204</b>	<b>2290</b>	200	2340	88	173	2700	175	2670	<b>174</b>	<b>2690</b>
454.calculix	88	281	2580	<b>282</b>	<b>2580</b>	282	2570	88	281	2580	<b>282</b>	<b>2580</b>	282	2570
459.GemsFDTD	88	1238	754	1236	756	<b>1237</b>	<b>755</b>	88	1238	754	1236	756	<b>1237</b>	<b>755</b>
465.tonto	88	<b>514</b>	<b>1680</b>	517	1670	513	1690	88	<b>495</b>	<b>1750</b>	495	1750	497	1740
470.lbm	88	803	1510	799	1510	<b>803</b>	<b>1510</b>	88	803	1510	799	1510	<b>803</b>	<b>1510</b>
481.wrf	88	<b>727</b>	<b>1350</b>	726	1350	727	1350	88	<b>727</b>	<b>1350</b>	726	1350	727	1350
482.sphinx3	88	1163	1470	<b>1159</b>	<b>1480</b>	1155	1480	88	1163	1470	<b>1159</b>	<b>1480</b>	1155	1480

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Kernel Boot Parameter set with : nohz\_full=1-87  
 Turbo mode set with :  
 cpupower -c all frequency-set -g performance  
 Tmpfs filesystem can be set with:  
 mkdir /home/memory  
 mount -t tmpfs -o size=752g,rw tmpfs /home/memory  
 Process tunning setting:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECfp\_rate2006 = 1520**

**SPECfp\_rate\_base2006 = 1490**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

## Platform Notes

BIOS configuration:

```
Link Frequency Select = 10.4 GT/s
HWPM Support = Disabled
Intel Virtualization Technology = Disabled
Sub NUMA Clustering = Enabled
IMC Interleaving = 1-way
LLC Dead Line Alloc = Disabled
Stale AtoS = Enabled
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-zz9i Thu Aug 3 12:20:50 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6152 CPU @ 2.10GHz
        2 "physical id"s (chips)
        88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 22
        siblings : 44
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
cache size : 30976 KB
```

```
From /proc/meminfo
MemTotal:      394407124 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECfp\_rate2006 = 1520**

**SPECfp\_rate\_base2006 = 1490**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-zz9i 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 3 00:04

SPEC is set to: /home/memory/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs          tmpfs  752G   4.1G  748G   1% /home/memory
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.4.1 for D3383-A1x
06/19/2017
Memory:
24x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64:/home/memory/speccpu/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECfp\_rate2006 = 1520**

**SPECfp\_rate\_base2006 = 1490**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Base Compiler Invocation

C benchmarks:  
`icc -m64`

C++ benchmarks:  
`icpc -m64`

Fortran benchmarks:  
`ifort -m64`

Benchmarks using both Fortran and C:  
`icc -m64 ifort -m64`

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3`

C++ benchmarks:  
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3`

Fortran benchmarks:  
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECfp\_rate2006 = 1520**

**SPECfp\_rate\_base2006 = 1490**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECfp\_rate2006 = 1520**

**SPECfp\_rate\_base2006 = 1490**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32  
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECfp\_rate2006 = 1520**

**SPECfp\_rate\_base2006 = 1490**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 20 13:42:47 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 September 2017.