



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10  
(2.30 GHz, Intel Xeon Gold 5118)

**SPECint®\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 2250**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

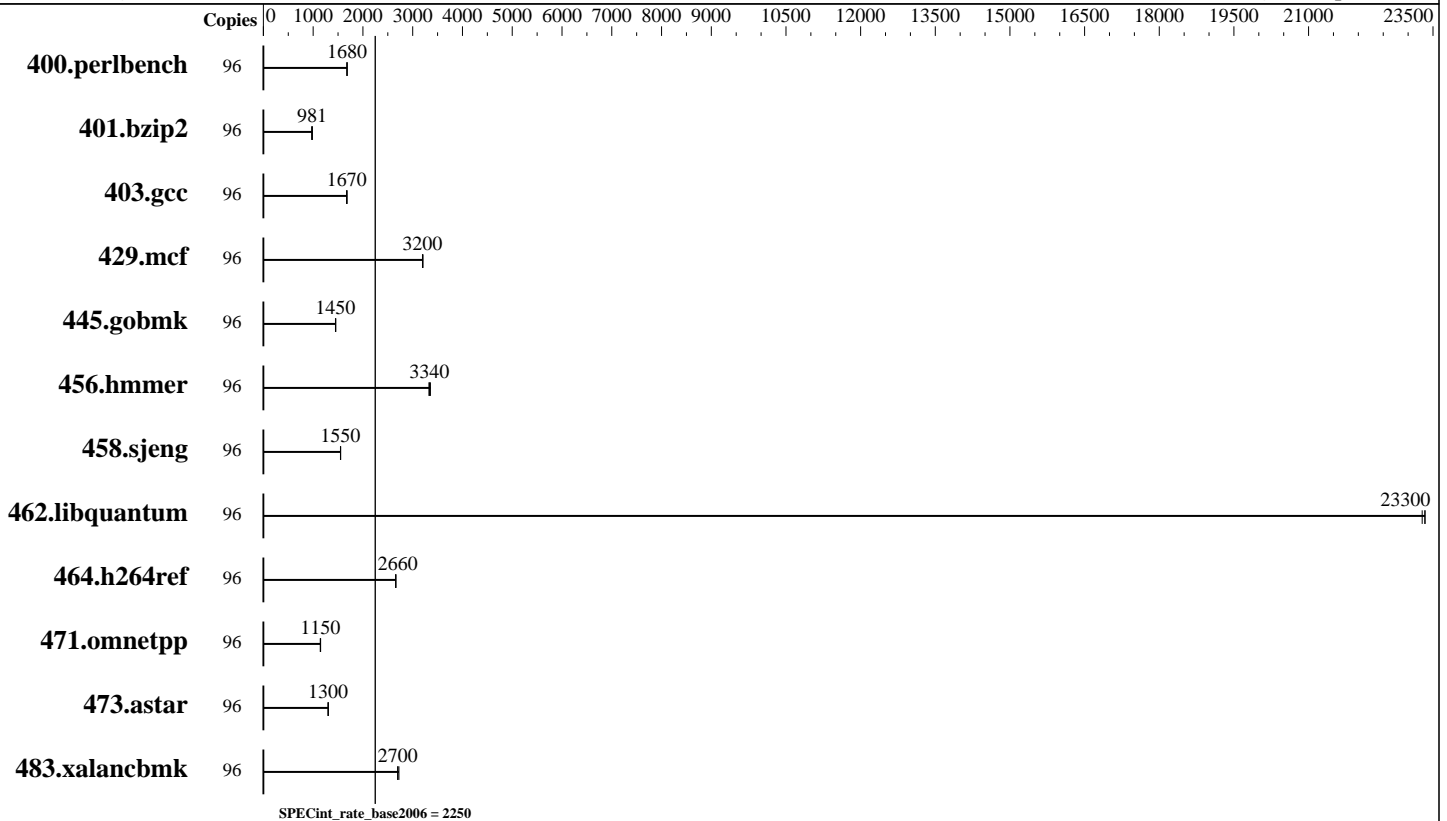

## Hardware

CPU Name: Intel Xeon Gold 5118  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2, 4 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 16.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)  
 Disk Subsystem: 1 x 600 GB SAS 15 K, RAID 0  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.73-5-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10  
(2.30 GHz, Intel Xeon Gold 5118)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 2250

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	96	<b>558</b>	<b>1680</b>	558	1680	559	1680							
401.bzip2	96	955	970	941	984	<b>945</b>	<b>981</b>							
403.gcc	96	462	1670	<b>461</b>	<b>1670</b>	460	1680							
429.mcf	96	273	3210	274	3200	<b>274</b>	<b>3200</b>							
445.gobmk	96	695	1450	692	1450	<b>694</b>	<b>1450</b>							
456.hammer	96	267	3360	269	3330	<b>268</b>	<b>3340</b>							
458.sjeng	96	<b>749</b>	<b>1550</b>	750	1550	748	1550							
462.libquantum	96	<b>85.2</b>	<b>23300</b>	85.4	23300	85.2	23300							
464.h264ref	96	<b>799</b>	<b>2660</b>	798	2660	799	2660							
471.omnetpp	96	522	1150	<b>524</b>	<b>1150</b>	524	1140							
473.astar	96	518	1300	<b>517</b>	<b>1300</b>	517	1300							
483.xalancbmk	96	<b>245</b>	<b>2700</b>	246	2700	243	2720							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
irqbalance disabled with "systemctl stop irqbalance"  
tuned profile set with "tuned-adm profile throughput-performance"  
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"  
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

## Platform Notes

BIOS Configuration:  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Workload Profile set to General Throughput Compute  
Minimum Processor Idle Power Core C-State set to C1E State  
Sysinfo program /home/cpu2006/config/sysinfo.rev6993

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10  
(2.30 GHz, Intel Xeon Gold 5118)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 2250

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-irgu Wed Oct 4 06:38:37 2017

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz

4 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The  
following excerpts from /proc/cpuinfo might not be reliable. Use with  
caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13

cache size : 16896 KB

From /proc/meminfo

MemTotal: 792281188 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP3

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 3

# This file is deprecated and will be removed in a future service pack or  
release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION\_ID="12.3"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-irgu 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017

(b7ce4e4) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Oct 4 05:57

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10  
(2.30 GHz, Intel Xeon Gold 5118)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 2250**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

SPEC is set to: /home/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	331G	76G	255G	23%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 08/18/2017

Memory:

48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz, configured at 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.htm>.

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10  
(2.30 GHz, Intel Xeon Gold 5118)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 2250

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
 403.gcc: -D\_FILE\_OFFSET\_BITS=64  
 429.mcf: -D\_FILE\_OFFSET\_BITS=64  
 445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
 456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
 458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
 462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
 471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
 473.astar: -D\_FILE\_OFFSET\_BITS=64  
 483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10  
(2.30 GHz, Intel Xeon Gold 5118)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 2250**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jun 14 11:29:42 2018 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 June 2018.