



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

**SPECrate2017\_fp\_base = 110**

**SPECrate2017\_fp\_peak = 114**

CPU2017 License: 9046


Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

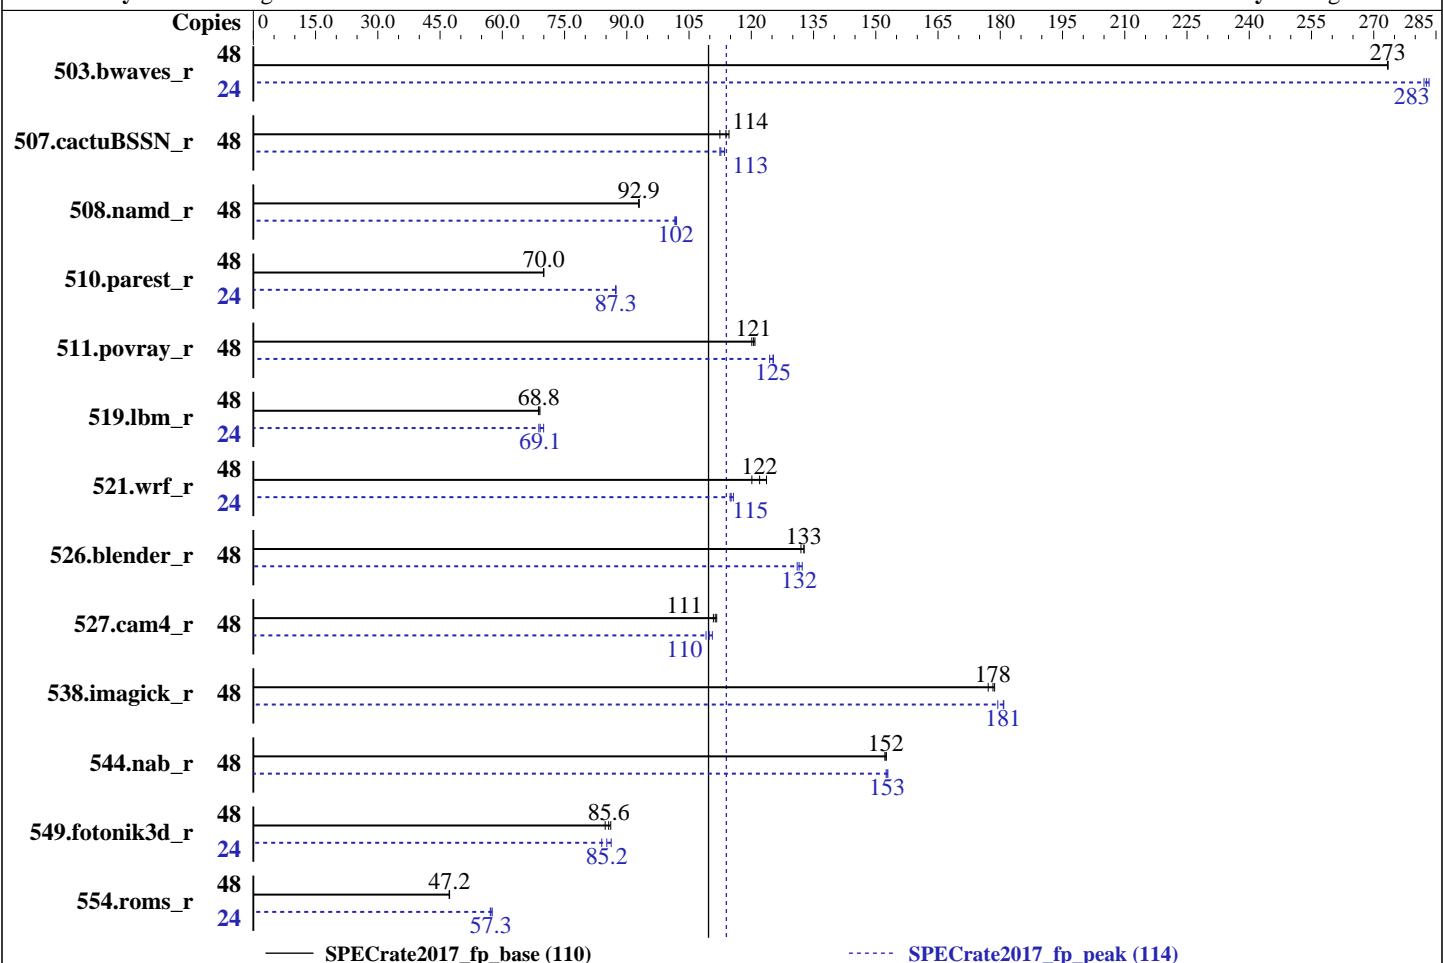

— SPECrate2017\_fp\_base (110)

····· SPECrate2017\_fp\_peak (114)

## Hardware

CPU Name: AMD EPYC 7401P  
Max MHz.: 3000  
Nominal: 2000  
Enabled: 24 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 64 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 64 MB I+D on chip per chip, 8 MB shared / 3 cores  
Other: None  
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2667V-R, running at 2400)  
Storage: 1 x 800 GB SATA, SSD  
Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP3  
kernel 4.4.73-5-default  
Compiler: C/C++: Version 1.0.0 of AOCC  
Fortran: Version 4.8.2 of GCC  
Parallel: No  
Firmware: American Megatrends Inc. BIOS Version 1QLSH012 released Sep-2017  
File System: ext4  
System State: Run level 3 (Multi User)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

**SPECrate2017\_fp\_base = 110**

**SPECrate2017\_fp\_peak = 114**

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1760	273	<b>1761</b>	<b>273</b>	1761	273	24	853	282	<b>851</b>	<b>283</b>	849	283
507.cactuBSSN_r	48	541	112	<b>534</b>	<b>114</b>	530	115	48	535	114	<b>539</b>	<b>113</b>	541	112
508.namd_r	48	491	92.9	491	92.9	<b>491</b>	<b>92.9</b>	48	449	102	447	102	<b>448</b>	<b>102</b>
510.parest_r	48	<b>1794</b>	<b>70.0</b>	1794	70.0	1796	69.9	24	719	87.3	719	87.4	<b>719</b>	<b>87.3</b>
511.povray_r	48	933	120	<b>930</b>	<b>121</b>	927	121	48	<b>895</b>	<b>125</b>	894	125	901	124
519.lbm_r	48	732	69.1	<b>735</b>	<b>68.8</b>	736	68.7	24	<b>366</b>	<b>69.1</b>	368	68.8	362	70.0
521.wrf_r	48	<b>881</b>	<b>122</b>	895	120	869	124	24	<b>467</b>	<b>115</b>	468	115	465	116
526.blender_r	48	551	133	<b>551</b>	<b>133</b>	554	132	48	<b>556</b>	<b>132</b>	558	131	553	132
527.cam4_r	48	757	111	752	112	<b>754</b>	<b>111</b>	48	770	109	759	111	<b>764</b>	<b>110</b>
538.imagick_r	48	668	179	674	177	<b>670</b>	<b>178</b>	48	<b>661</b>	<b>181</b>	660	181	665	179
544.nab_r	48	530	153	531	152	<b>530</b>	<b>152</b>	48	530	152	528	153	<b>529</b>	<b>153</b>
549.fotonik3d_r	48	2172	86.1	2206	84.8	<b>2184</b>	<b>85.6</b>	24	1085	86.2	<b>1098</b>	<b>85.2</b>	1114	84.0
554.roms_r	48	<b>1614</b>	<b>47.2</b>	1616	47.2	1613	47.3	24	662	57.6	668	57.1	<b>666</b>	<b>57.3</b>

**SPECrate2017\_fp\_base = 110**

**SPECrate2017\_fp\_peak = 114**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory

sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

SPECrate2017\_fp\_base = 110

SPECrate2017\_fp\_peak = 114

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:  
MALLOC_CONF = "lg_chunk:28"
```

The AMD64 AOCC Compiler Suite is available at

<http://developer.amd.com/tools-and-sdks/cpu-development/amd-optimizing-cc-compiler/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing  
of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to  $2^{21} = 2\text{MiB}$ .

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers  
with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

## Platform Notes

BIOS settings:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on localhost Sun Dec 10 20:50:15 2017
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7401P 24-Core Processor

1 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

SPECrate2017\_fp\_base = 110

SPECrate2017\_fp\_peak = 114

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

## Platform Notes (Continued)

physical 0: cores 0 1 2 3 4 5

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             1
NUMA node(s):          4
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7401P 24-Core Processor
Stepping:               2
CPU MHz:               1200.000
CPU max MHz:           2000.0000
CPU min MHz:           1200.0000
BogoMIPS:              3992.25
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0-5,24-29
NUMA node1 CPU(s):     6-11,30-35
NUMA node2 CPU(s):     12-17,36-41
NUMA node3 CPU(s):     18-23,42-47
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap
clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf overflow_recov succor smca
```

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

SPECrate2017\_fp\_base = 110

SPECrate2017\_fp\_peak = 114

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

## Platform Notes (Continued)

```
node 0 size: 62511 MB
node 0 free: 62294 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 64507 MB
node 1 free: 64292 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 64507 MB
node 2 free: 64278 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 64506 MB
node 3 free: 64294 MB
node distances:
node   0   1   2   3
  0: 10  16  16  16
  1: 16  10  16  16
  2: 16  16  10  16
  3: 16  16  16  10
```

```
From /proc/meminfo
MemTotal:      262176928 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP3"
    VERSION_ID="12.3"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux localhost 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 7 21:30
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

SPECrate2017\_fp\_base = 110

SPECrate2017\_fp\_peak = 114

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	ext4	722G	51G	670G	8%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1QLSH012 09/15/2017

Memory:

8x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400  
8x Unknown Unknown

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----

=====
CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----

=====
CC 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

SPECrate2017\_fp\_base = 110

SPECrate2017\_fp\_peak = 114

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

## Compiler Version Notes (Continued)

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

---

---

=====

FC 507.cactuBSSN\_r(base, peak)

---

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

---

---

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

---

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

---

---

=====

CC 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

---

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

SPECrate2017\_fp\_base = 110

SPECrate2017\_fp\_peak = 114

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

## Compiler Version Notes (Continued)

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.llbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

SPECrate2017\_fp\_base = 110

SPECrate2017\_fp\_peak = 114

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

## Base Portability Flags (Continued)

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-fno -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math  
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100  
-fremap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-fno -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3  
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive  
-fremap-arrays -inline-threshold=1000 -z muldefs -ljemalloc
```

Fortran benchmarks:

```
-fno -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(gfortran)  
-O3(clang) -mavx -madx -funroll-loops -ffast-math -z muldefs  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"  
-ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-fno -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)  
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm  
-unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000  
-O3(gfortran) -mavx -madx -funroll-loops -z muldefs  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"  
-ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-fno -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math  
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100  
-fremap-arrays -mno-avx2 -inline-threshold=1000 -finline-aggressive  
-z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-fno -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

SPECrate2017\_fp\_base = 110

SPECrate2017\_fp\_peak = 114

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm
-unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000
-finline-aggressive -O3(gfortran) -mavx -madx -funroll-loops
-z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
-ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

SPECrate2017\_fp\_base = 110

SPECrate2017\_fp\_peak = 114

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -ml llvm -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(gfortran) -O3(clang) -mavx2
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant"
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(clang) -mavx
-ffast-math -O3(gfortran) -funroll-loops
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant"
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -ml llvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -O3(gfortran) -O3(clang) -mavx2
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant"
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -ml llvm -vectorize-memory-aggressively -mno-avx2
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-finline-aggressive -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -ml llvm -vectorize-memory-aggressively -mno-avx2
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-finline-aggressive -O3 -mavx2 -madx -funroll-loops -ffast-math
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant"
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Sugon

Sugon A320-G30  
(AMD EPYC 7401P)

SPECrate2017\_fp\_base = 110

SPECrate2017\_fp\_peak = 114

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-inline-threshold:1000" -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.html>

<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.xml>

<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-12-10 07:50:14-0500.

Report generated on 2019-02-20 21:10:08 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.