



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

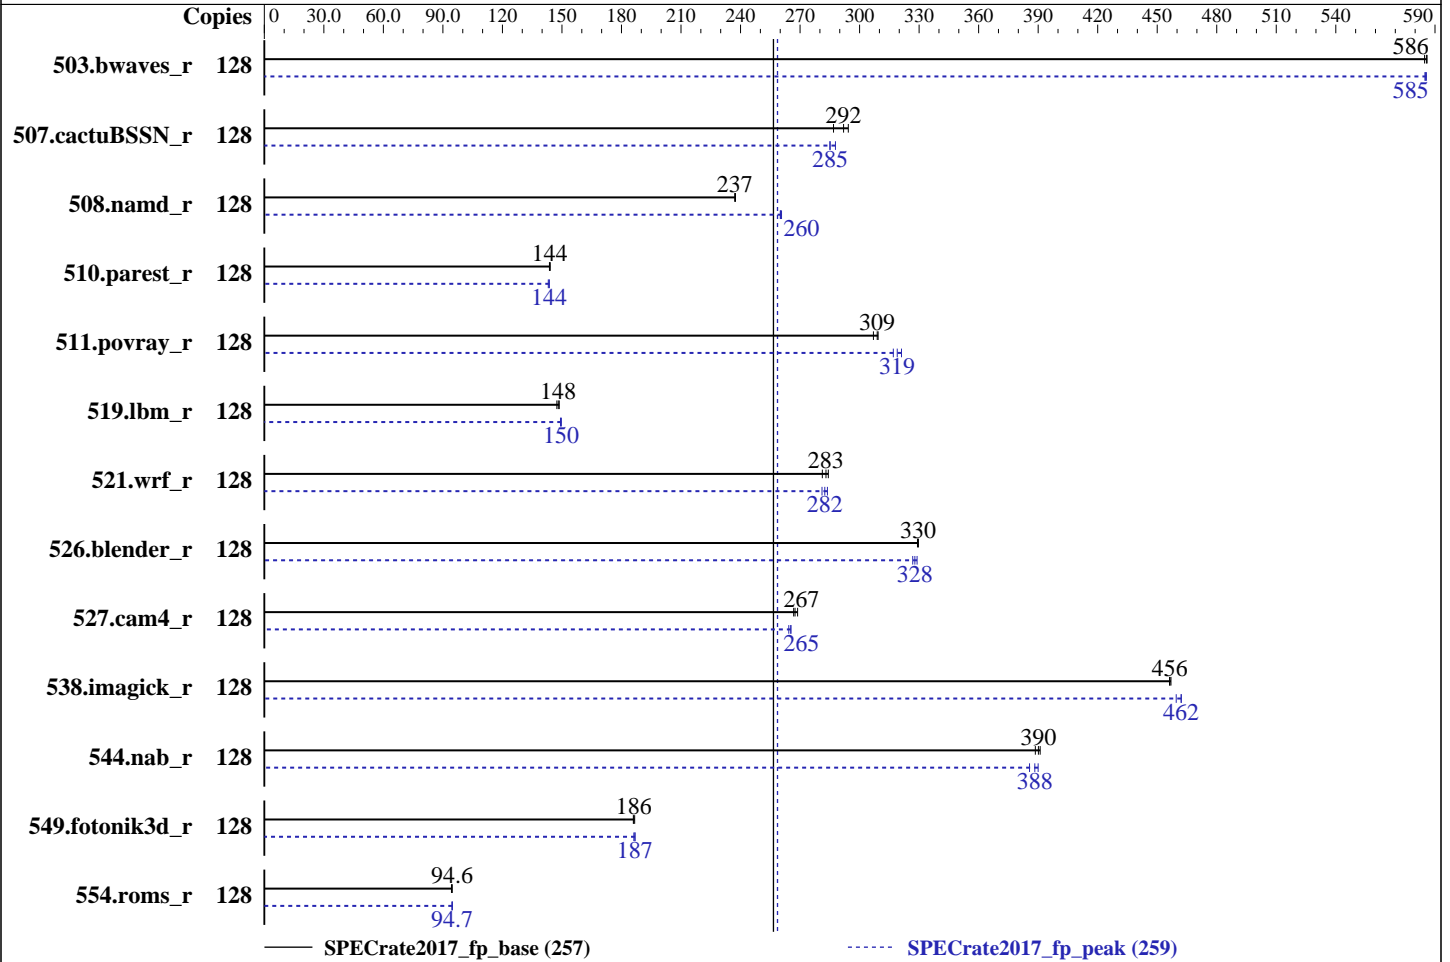

### Hardware

CPU Name: AMD EPYC 7601  
 Max MHz.: 3200  
 Nominal: 2200  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Ubuntu 17.04  
 kernel 4.10.0-24  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Version 1.0.2 released Nov-2017  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator library, version 4.5.0



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2017  
Hardware Availability: Dec-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	2190	586	2195	585	<b>2192</b>	<b>586</b>	128	2192	586	<b>2194</b>	<b>585</b>	2194	585
507.cactuBSSN_r	128	565	287	<b>555</b>	<b>292</b>	551	294	128	563	288	<b>568</b>	<b>285</b>	569	285
508.namd_r	128	513	237	512	237	<b>513</b>	<b>237</b>	128	467	261	<b>467</b>	<b>260</b>	468	260
510.parest_r	128	2330	144	<b>2327</b>	<b>144</b>	2325	144	128	<b>2333</b>	<b>144</b>	2340	143	2332	144
511.povray_r	128	966	309	974	307	<b>968</b>	<b>309</b>	128	931	321	<b>937</b>	<b>319</b>	943	317
519.lbm_r	128	908	149	<b>911</b>	<b>148</b>	915	147	128	904	149	<b>902</b>	<b>150</b>	902	150
521.wrf_r	128	1009	284	1020	281	<b>1013</b>	<b>283</b>	128	1010	284	<b>1015</b>	<b>282</b>	1020	281
526.blender_r	128	<b>592</b>	<b>330</b>	592	329	591	330	128	597	327	<b>595</b>	<b>328</b>	593	329
527.cam4_r	128	839	267	833	269	<b>837</b>	<b>267</b>	128	847	264	844	265	<b>844</b>	<b>265</b>
538.imagick_r	128	698	456	697	457	<b>697</b>	<b>456</b>	128	<b>689</b>	<b>462</b>	689	462	693	460
544.nab_r	128	554	389	<b>552</b>	<b>390</b>	551	391	128	552	390	<b>555</b>	<b>388</b>	559	386
549.fotonik3d_r	128	2682	186	2672	187	<b>2679</b>	<b>186</b>	128	2670	187	<b>2671</b>	<b>187</b>	2678	186
554.roms_r	128	2150	94.6	<b>2150</b>	<b>94.6</b>	2157	94.3	128	<b>2148</b>	<b>94.7</b>	2150	94.6	2147	94.7

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Sep-2017

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revB/64;/home/cpu2017/amd1704-rate-libs-revB/32:"  
MALLOCONF = "lg_chunk:28"
```

The AMD64 AOCC Compiler Suite is available at

<http://developer.amd.com/amd-aocc>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran.

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at

<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOCONF with values narenas and lg\_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example, lg\_chunk:21 sets the default chunk size to  $2^{21} = 2\text{MiB}$ .

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

BIOS settings:

Memory Interleaving set to Channel Interleaving

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

Virtualization Technology disabled  
 System Profile set to Custom  
 CPU Power Management set to Maximum Performance  
 Memory Frequency set to Maximum Performance  
 Turbo Boost enabled  
 C States disabled  
 Memory Patrol Scrub disabled  
 Memory Refresh Rate set to 1x  
 PCI ASPM L1 Link Power Management disabled  
 Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
 running on epyc Sun Nov 12 00:43:34 2017

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : AMD EPYC 7601 32-Core Processor  
 2 "physical id"s (chips)  
 128 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 32  
 siblings : 64  
 physical 0: cores 0 1 2 3 4 5 6 7  
 physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:  
 Architecture: x86\_64  
 CPU op-mode(s): 32-bit, 64-bit  
 Byte Order: Little Endian  
 CPU(s): 128  
 On-line CPU(s) list: 0-127  
 Thread(s) per core: 2  
 Core(s) per socket: 32  
 Socket(s): 2  
 NUMA node(s): 8  
 Vendor ID: AuthenticAMD  
 CPU family: 23  
 Model: 1  
 Model name: AMD EPYC 7601 32-Core Processor  
 Stepping: 2  
 CPU MHz: 2195.725  
 BogoMIPS: 4391.45  
 Virtualization: AMD-V  
 L1d cache: 32K

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Nov-2017  
**Hardware Availability:** Dec-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

```

L1i cache:          64K
L2 cache:           512K
L3 cache:           8192K
NUMA node0 CPU(s): 0, 8, 16, 24, 32, 40, 48, 56, 64, 72, 80, 88, 96, 104, 112, 120
NUMA node1 CPU(s): 2, 10, 18, 26, 34, 42, 50, 58, 66, 74, 82, 90, 98, 106, 114, 122
NUMA node2 CPU(s): 4, 12, 20, 28, 36, 44, 52, 60, 68, 76, 84, 92, 100, 108, 116, 124
NUMA node3 CPU(s): 6, 14, 22, 30, 38, 46, 54, 62, 70, 78, 86, 94, 102, 110, 118, 126
NUMA node4 CPU(s): 1, 9, 17, 25, 33, 41, 49, 57, 65, 73, 81, 89, 97, 105, 113, 121
NUMA node5 CPU(s): 3, 11, 19, 27, 35, 43, 51, 59, 67, 75, 83, 91, 99, 107, 115, 123
NUMA node6 CPU(s): 5, 13, 21, 29, 37, 45, 53, 61, 69, 77, 85, 93, 101, 109, 117, 125
NUMA node7 CPU(s): 7, 15, 23, 31, 39, 47, 55, 63, 71, 79, 87, 95, 103, 111, 119, 127
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw skinit
wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb hw_pstate
vmxcall fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt
xsaves xgetbv1 xsaves clzero irperf arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic overflow_recov
succor smca

```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120
node 0 size: 128639 MB
node 0 free: 128165 MB
node 1 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122
node 1 size: 129004 MB
node 1 free: 128591 MB
node 2 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124
node 2 size: 129021 MB
node 2 free: 128619 MB
node 3 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126
node 3 size: 129021 MB
node 3 free: 128625 MB
node 4 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121
node 4 size: 129021 MB
node 4 free: 128576 MB
node 5 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123
node 5 size: 129021 MB
node 5 free: 128614 MB
node 6 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```

node 6 size: 129021 MB
node 6 free: 128594 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127
node 7 size: 129019 MB
node 7 free: 128615 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 16 16 16 28 28 22 28
  1: 16 10 16 16 28 28 28 22
  2: 16 16 10 16 22 28 28 28
  3: 16 16 16 10 28 22 28 28
  4: 28 28 22 28 10 16 16 16
  5: 28 28 28 22 16 10 16 16
  6: 22 28 28 28 16 16 10 16
  7: 28 22 28 28 16 16 16 10

```

```

From /proc/meminfo
MemTotal:      1056530872 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Ubuntu 17.04

```

```

From /etc/*release* /etc/*version*
debian_version: stretch/sid
os-release:
  NAME="Ubuntu"
  VERSION="17.04 (Zesty Zapus)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 17.04"
  VERSION_ID="17.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"

```

```

uname -a:
Linux epyc 4.10.0-24-generic #28-Ubuntu SMP Wed Jun 14 08:14:34 UTC 2017 x86_64 x86_64
x86_64 GNU/Linux

```

run-level 5 Jun 27 20:06

```

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  880G  8.9G  826G   2% /

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.2 11/03/2017

Memory:

16x 802C8632802C 72ASS8G72LZ-2G6B2 64 GB 4 rank 2666

16x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
=====

=====  
CXXC 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
=====

=====  
CC 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
=====

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Nov-2017  
**Hardware Availability:** Dec-2017  
**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

=====  
FC 507.cactuBSSN\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING  
-----

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base,  
peak)  
=====

GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING  
-----

=====  
CC 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Sep-2017

## Base Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100  
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs  
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madox  
-funroll-loops -ffast-math -z muldefs -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc  
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1  
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays  
-mno-avx2 -inline-threshold=1000 -O3(gfortran) -mavx -madox  
-funroll-loops -z muldefs -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc  
-lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-inline-threshold=1000 -finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1  
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays  
-mno-avx2 -inline-threshold=1000 -finline-aggressive -O3(gfortran)  
-mavx -madox -funroll-loops -z muldefs -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Sep-2017

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-ljemalloc

C++ benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000 -ljemalloc

Fortran benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-O3(gfortran) -O3(clang) -mavx2 -madx -funroll-loops -ffast-math  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -O3(clang) -mavx -ffast-math
-O3(gfortran) -funroll-loops -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -O3(gfortran) -O3(clang) -mavx2
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-finline-aggressive -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-finline-aggressive -O3 -mavx2 -madx -funroll-loops -ffast-math
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/amd1704-Dell-platform-revB-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/amd1704-Dell-platform-revB-I.xml>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R7425  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_fp\_base = 257

SPECrate2017\_fp\_peak = 259

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Sep-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-11-12 01:43:33-0500.

Report generated on 2019-02-21 12:51:31 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-15.