



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

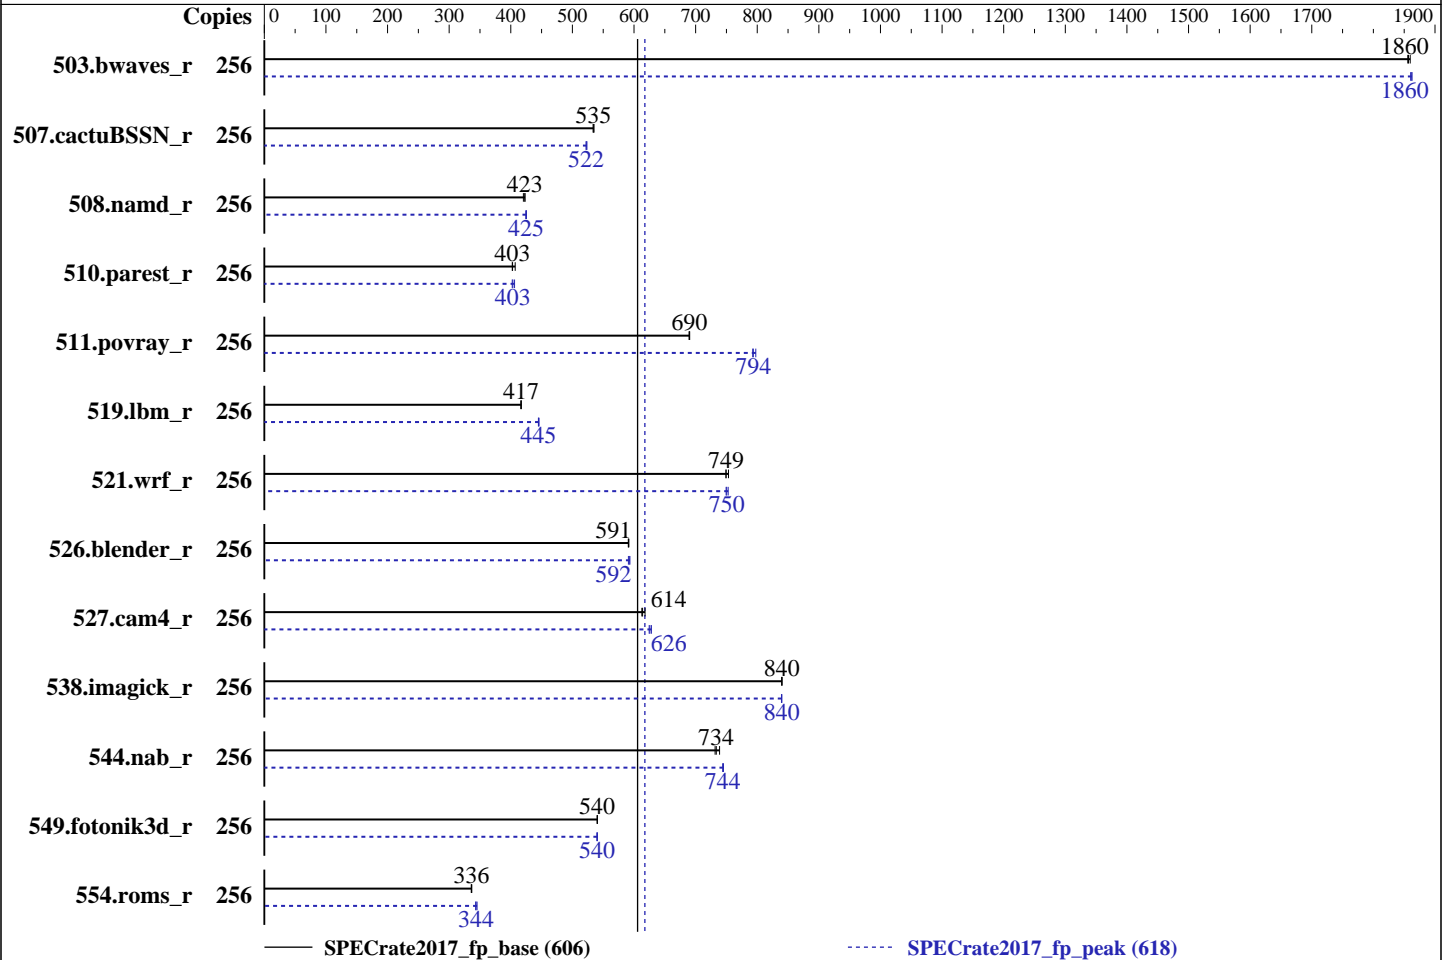

Hardware

CPU Name: Intel Xeon Platinum 8153
 Max MHz.: 2800
 Nominal: 2000
 Enabled: 128 cores, 8 chips, 2 threads/core
 Orderable: 2,4,8 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 22 MB I+D on chip per chip
 Other: None
 Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 800 GB tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version PSE105X 1.00 released Aug-2017
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	1383	1860	<u>1382</u>	<u>1860</u>	1380	1860	256	1378	1860	1380	1860	<u>1378</u>	<u>1860</u>
507.cactuBSSN_r	256	607	534	<u>606</u>	<u>535</u>	606	535	256	620	522	<u>620</u>	<u>522</u>	619	524
508.namd_r	256	<u>575</u>	<u>423</u>	578	420	575	423	256	573	424	572	425	<u>572</u>	<u>425</u>
510.parest_r	256	1645	407	1664	402	<u>1662</u>	<u>403</u>	256	<u>1660</u>	<u>403</u>	1664	402	1649	406
511.povray_r	256	<u>866</u>	<u>690</u>	867	689	866	690	256	754	793	<u>753</u>	<u>794</u>	749	798
519.lbm_r	256	648	417	647	417	<u>648</u>	<u>417</u>	256	607	445	<u>606</u>	<u>445</u>	605	446
521.wrf_r	256	761	753	<u>765</u>	<u>749</u>	765	749	256	765	749	762	753	<u>764</u>	<u>750</u>
526.blender_r	256	660	591	659	592	<u>660</u>	<u>591</u>	256	<u>658</u>	<u>592</u>	657	593	660	591
527.cam4_r	256	731	613	725	618	<u>729</u>	<u>614</u>	256	713	628	717	625	<u>715</u>	<u>626</u>
538.imagick_r	256	758	840	758	840	<u>758</u>	<u>840</u>	256	<u>758</u>	<u>840</u>	758	840	759	839
544.nab_r	256	583	739	<u>587</u>	<u>734</u>	589	732	256	<u>579</u>	<u>744</u>	578	745	579	744
549.fotonik3d_r	256	1846	540	1845	541	<u>1846</u>	<u>540</u>	256	<u>1847</u>	<u>540</u>	1846	541	1848	540
554.roms_r	256	<u>1210</u>	<u>336</u>	1208	337	1211	336	256	<u>1184</u>	<u>344</u>	1178	345	1186	343

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
mount -t tmpfs -o size=800g tmpfs /home
Process tuning setting:
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 606

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_peak = 618

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

General Notes (Continued)

Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance
SNC set to Enable
DCU Streamer Prefetcher set to Disable
MONITORM/WAIT set to Enable
Execute Disable Bit set to Disable
Trusted Execution Technology set to Enable
Per Core Pstate set to Disable
XPT Prefetcher set to Enable
Stale AtoS set to Enable
LLC Deadline Alloc set to Enable
Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-boxi Thu Jan 11 00:20:11 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz

8 "physical id"s (chips)

256 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 4: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 5: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 6: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 7: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 256

On-line CPU(s) list: 0-255

Thread(s) per core: 2

Core(s) per socket: 16

Socket(s): 8

NUMA node(s): 16

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz

Stepping: 4

CPU MHz: 1995.327

BogoMIPS: 3990.65

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 1024K

L3 cache: 22528K

NUMA node0 CPU(s): 0-3,8-11,128-131,136-139

NUMA node1 CPU(s): 4-7,12-15,132-135,140-143

NUMA node2 CPU(s): 16-19,24-27,144-147,152-155

NUMA node3 CPU(s): 20-23,28-31,148-151,156-159

NUMA node4 CPU(s): 32-35,40-43,160-163,168-171

NUMA node5 CPU(s): 36-39,44-47,164-167,172-175

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 606

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_peak = 618

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

```

NUMA node6 CPU(s): 48-51,56-59,176-179,184-187
NUMA node7 CPU(s): 52-55,60-63,180-183,188-191
NUMA node8 CPU(s): 64-67,72-75,192-195,200-203
NUMA node9 CPU(s): 68-71,76-79,196-199,204-207
NUMA node10 CPU(s): 80-83,88-91,208-211,216-219
NUMA node11 CPU(s): 84-87,92-95,212-215,220-223
NUMA node12 CPU(s): 96-99,104-107,224-227,232-235
NUMA node13 CPU(s): 100-103,108-111,228-231,236-239
NUMA node14 CPU(s): 112-115,120-123,240-243,248-251
NUMA node15 CPU(s): 116-119,124-127,244-247,252-255

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 8 9 10 11 128 129 130 131 136 137 138 139
node 0 size: 192984 MB
node 0 free: 192366 MB
node 1 cpus: 4 5 6 7 12 13 14 15 132 133 134 135 140 141 142 143
node 1 size: 193528 MB
node 1 free: 192932 MB
node 2 cpus: 16 17 18 19 24 25 26 27 144 145 146 147 152 153 154 155
node 2 size: 193528 MB
node 2 free: 193002 MB
node 3 cpus: 20 21 22 23 28 29 30 31 148 149 150 151 156 157 158 159
node 3 size: 193528 MB
node 3 free: 188018 MB
node 4 cpus: 32 33 34 35 40 41 42 43 160 161 162 163 168 169 170 171
node 4 size: 193528 MB
node 4 free: 192962 MB
node 5 cpus: 36 37 38 39 44 45 46 47 164 165 166 167 172 173 174 175
node 5 size: 193528 MB
node 5 free: 193012 MB
node 6 cpus: 48 49 50 51 56 57 58 59 176 177 178 179 184 185 186 187
node 6 size: 193528 MB
node 6 free: 193001 MB

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```

node 7 cpus: 52 53 54 55 60 61 62 63 180 181 182 183 188 189 190 191
node 7 size: 193528 MB
node 7 free: 193012 MB
node 8 cpus: 64 65 66 67 72 73 74 75 192 193 194 195 200 201 202 203
node 8 size: 193528 MB
node 8 free: 184376 MB
node 9 cpus: 68 69 70 71 76 77 78 79 196 197 198 199 204 205 206 207
node 9 size: 193528 MB
node 9 free: 193009 MB
node 10 cpus: 80 81 82 83 88 89 90 91 208 209 210 211 216 217 218 219
node 10 size: 193528 MB
node 10 free: 192989 MB
node 11 cpus: 84 85 86 87 92 93 94 95 212 213 214 215 220 221 222 223
node 11 size: 193528 MB
node 11 free: 192991 MB
node 12 cpus: 96 97 98 99 104 105 106 107 224 225 226 227 232 233 234 235
node 12 size: 193528 MB
node 12 free: 192991 MB
node 13 cpus: 100 101 102 103 108 109 110 111 228 229 230 231 236 237 238 239
node 13 size: 193528 MB
node 13 free: 193000 MB
node 14 cpus: 112 113 114 115 120 121 122 123 240 241 242 243 248 249 250 251
node 14 size: 193528 MB
node 14 free: 193011 MB
node 15 cpus: 116 117 118 119 124 125 126 127 244 245 246 247 252 253 254 255
node 15 size: 193523 MB
node 15 free: 193010 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0: 10 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20
 1: 20 10 20 20 20 20 20 20 20 20 20 20 20 20 20 20
 2: 20 20 10 20 20 20 20 20 20 20 20 20 20 20 20 20
 3: 20 20 20 10 20 20 20 20 20 20 20 20 20 20 20 20
 4: 20 20 20 20 10 20 20 20 20 20 20 20 20 20 20 20
 5: 20 20 20 20 20 10 20 20 20 20 20 20 20 20 20 20
 6: 20 20 20 20 20 20 10 20 20 20 20 20 20 20 20 20
 7: 20 20 20 20 20 20 20 10 20 20 20 20 20 20 20 20
 8: 20 20 20 20 20 20 20 20 10 20 20 20 20 20 20 20
 9: 20 20 20 20 20 20 20 20 20 10 20 20 20 20 20 20
10: 20 20 20 20 20 20 20 20 20 20 10 20 20 20 20 20
11: 20 20 20 20 20 20 20 20 20 20 20 10 20 20 20 20
12: 20 20 20 20 20 20 20 20 20 20 20 20 10 20 20 20
13: 20 20 20 20 20 20 20 20 20 20 20 20 20 10 20 20
14: 20 20 20 20 20 20 20 20 20 20 20 20 20 20 10 20
15: 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 10

```

From /proc/meminfo

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Platform Notes (Continued)

MemTotal: 3170207908 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
```

```
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-boxi 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 10 19:26
```

```
SPEC is set to: /home/cpu2017.1.1.0.2.ic18.0
Filesystem      Type      Size      Used Avail Use% Mounted on
tmpfs            tmpfs     800G      11G  790G   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[PSE105X-1.00]- 08/17/2017
Memory:
  96x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 519.lbm_r(peak) 544.nab_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(peak)

=====
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

=====
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 554.roms_r(peak)

=====
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

=====
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)

=====
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 606

SPECrate2017_fp_peak = 618

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-01-10 11:20:10-0500.

Report generated on 2018-10-31 16:50:38 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-06.