



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081


Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

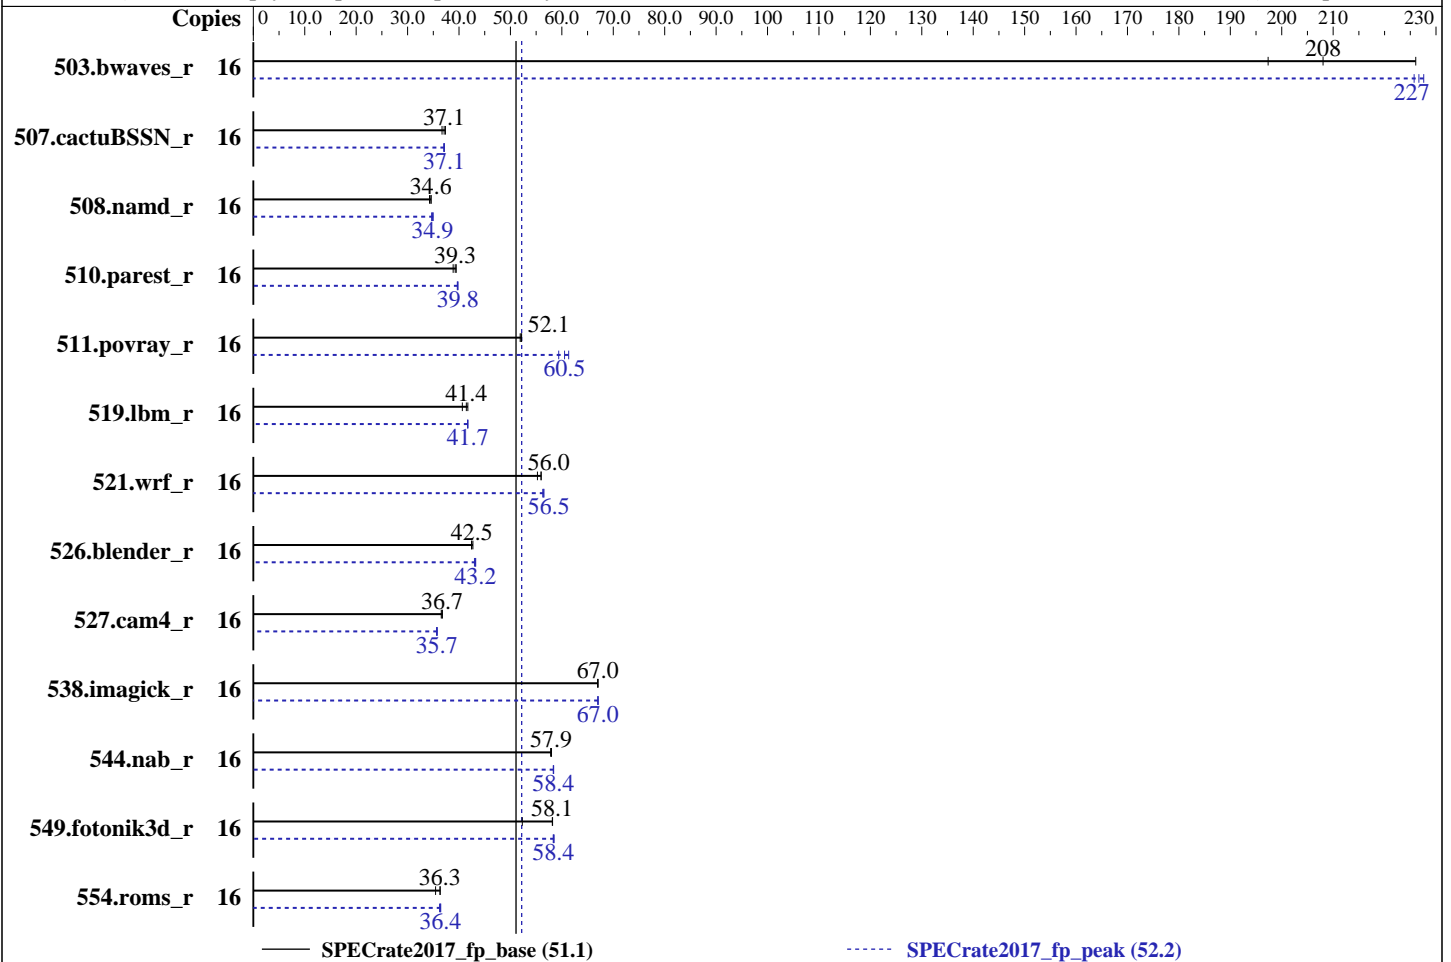

Hardware

CPU Name: Intel Xeon Silver 4112
 Max MHz.: 3000
 Nominal: 2600
 Enabled: 8 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 8.25 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2666V-R, running at 2400)
 Storage: 1 x 960 GB SSD SATA III
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version BIOSR0009 released Oct-2017
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	813	197	<u>771</u>	<u>208</u>	710	226	16	705	228	711	226	<u>708</u>	<u>227</u>
507.cactuBSSN_r	16	552	36.7	<u>546</u>	<u>37.1</u>	542	37.4	16	<u>546</u>	<u>37.1</u>	547	37.0	545	37.2
508.namd_r	16	<u>440</u>	<u>34.6</u>	440	34.6	444	34.3	16	<u>436</u>	<u>34.9</u>	435	35.0	438	34.7
510.parest_r	16	1077	38.9	<u>1066</u>	<u>39.3</u>	1061	39.5	16	1052	39.8	<u>1053</u>	<u>39.8</u>	1055	39.7
511.povray_r	16	716	52.2	<u>717</u>	<u>52.1</u>	720	51.9	16	609	61.3	629	59.4	<u>617</u>	<u>60.5</u>
519.lbm_r	16	415	40.6	<u>407</u>	<u>41.4</u>	404	41.7	16	<u>404</u>	<u>41.7</u>	404	41.7	405	41.7
521.wrf_r	16	649	55.3	<u>641</u>	<u>56.0</u>	640	56.0	16	<u>635</u>	<u>56.5</u>	634	56.5	637	56.3
526.blender_r	16	574	42.4	<u>574</u>	<u>42.5</u>	571	42.7	16	563	43.2	<u>564</u>	<u>43.2</u>	567	43.0
527.cam4_r	16	761	36.8	<u>763</u>	<u>36.7</u>	766	36.5	16	<u>784</u>	<u>35.7</u>	782	35.8	785	35.6
538.imagick_r	16	594	67.0	594	67.0	<u>594</u>	<u>67.0</u>	16	<u>594</u>	<u>67.0</u>	594	67.0	593	67.1
544.nab_r	16	<u>465</u>	<u>57.9</u>	464	58.0	466	57.8	16	461	58.4	<u>461</u>	<u>58.4</u>	462	58.3
549.fotonik3d_r	16	1192	52.3	1071	58.2	<u>1072</u>	<u>58.1</u>	16	<u>1068</u>	<u>58.4</u>	1069	58.3	1066	58.5
554.roms_r	16	717	35.4	700	36.3	<u>700</u>	<u>36.3</u>	16	<u>699</u>	<u>36.4</u>	702	36.2	698	36.4

SPECrate2017_fp_base = 51.1

SPECrate2017_fp_peak = 52.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/cpu2017.1.0/lib/ia32:/cpu2017.1.0/lib/intel64:/cpu2017.1.0/je5.0.1-32:/cpu2017.1.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32 GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

General Notes (Continued)

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Intel(R) Hyper-Threading Tech = Enabled
CPU Power and Performance Policy = Performance
Intel(R) Turbo Boost Technology = Enabled
C1E = Disabled
Processor C6 = Disabled
IMC Interleaving = Auto
Sub_NUMA Cluster = Disabled
Set FAN Profile = Performance
Patrol Scrub = Disabled

sysinfo program /cpu2017.1.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on SUT Wed Feb 14 20:12:11 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4112 CPU @ 2.60GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 8
physical 0: cores 1 2 4 5
physical 1: cores 1 2 4 5
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
Thread(s) per core: 2
Core(s) per socket: 4
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):            2
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Silver 4112 CPU @ 2.60GHz
Stepping:                4
CPU MHz:                 2900.015
CPU max MHz:             3000.0000
CPU min MHz:             800.0000
BogoMIPS:                5200.00
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                8448K
NUMA node0 CPU(s):      0-3,8-11
NUMA node1 CPU(s):      4-7,12-15
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req

```

```

/proc/cpuinfo cache data
cache size : 8448 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 8 9 10 11
node 0 size: 129740 MB
node 0 free: 126364 MB
node 1 cpus: 4 5 6 7 12 13 14 15
node 1 size: 131072 MB
node 1 free: 128012 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

From /proc/meminfo

MemTotal: 262577764 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.4 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VARIANT="Server"

VARIANT_ID="server"

VERSION_ID="7.4"

PRETTY_NAME="Red Hat Enterprise Linux"

redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:

Linux SUT 3.10.0-693.el7.x86_64 #1 SMP Thu Jul 6 19:56:57 EDT 2017 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 14 11:02

SPEC is set to: /cpu2017.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda1	ext4	825G	79G	705G	10%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.00.01.0009.101920170742 10/19/2017

Memory:

16x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Compiler Version Notes (Continued)

=====
CC 519.lbm_r(peak) 544.nab_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
 ifort (IFORT) 18.0.0 20170811
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN_r(peak)

icpc (ICC) 18.0.0 20170811
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
 icc (ICC) 18.0.0 20170811
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
 ifort (IFORT) 18.0.0 20170811
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms_r(peak)

ifort (IFORT) 18.0.0 20170811
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.0 20170811
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
 icc (ICC) 18.0.0 20170811
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(peak) 527.cam4_r(peak)

ifort (IFORT) 18.0.0 20170811
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
 icc (ICC) 18.0.0 20170811
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs

-align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs

-align array32byte

Benchmarks using both C and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs

-align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_fp_base = 51.1

eterio 820 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_fp_peak = 52.2

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Feb-2018-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Feb-2018-For-Intel-Platform.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-02-14 14:12:10-0500.

Report generated on 2018-10-31 17:12:31 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-29.