



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY CX2550 M4, Intel Xeon Silver 4116,  
2.10GHz

**SPECrate2017\_fp\_base = 117**

**SPECrate2017\_fp\_peak = Not Run**

**CPU2017 License:** 19


**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Apr-2018

**Hardware Availability:** Dec-2017

**Software Availability:** Mar-2018

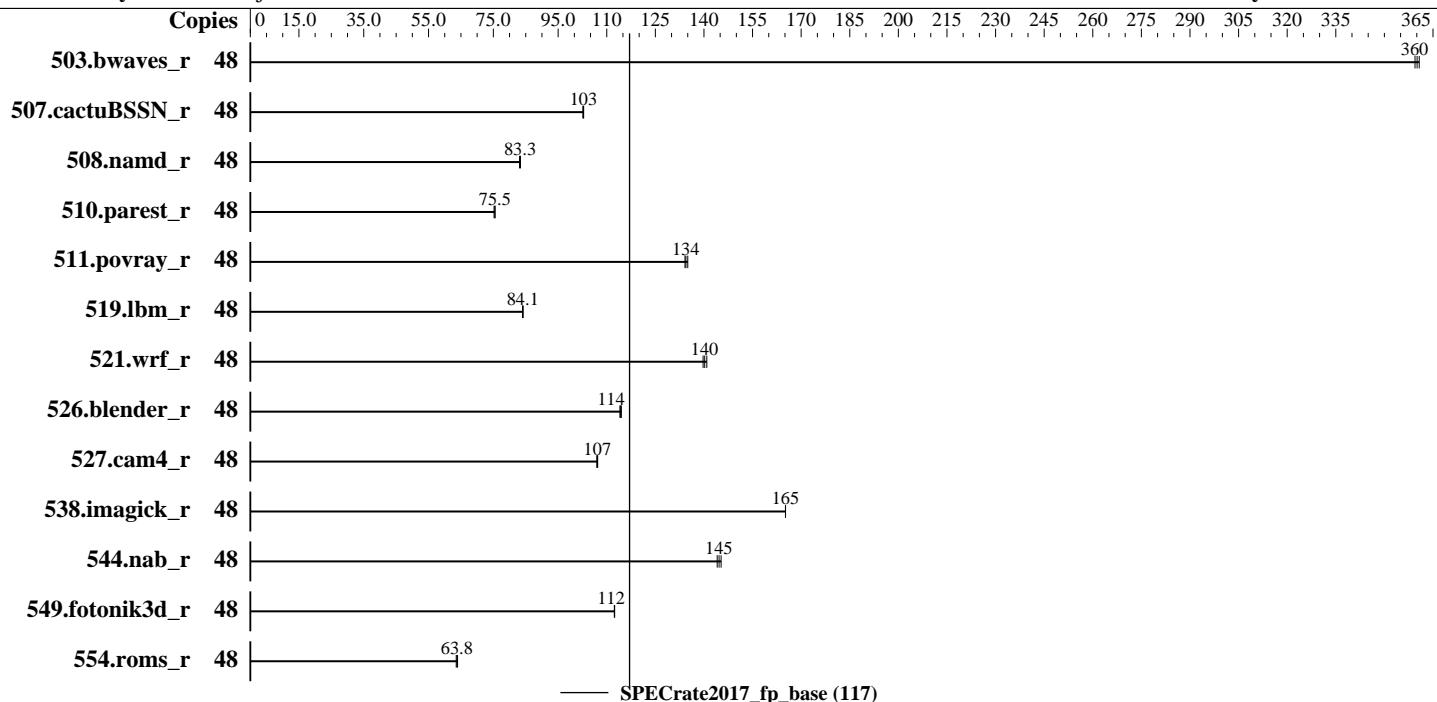

## Hardware

CPU Name: Intel Xeon Silver 4116  
 Max MHz.: 3000  
 Nominal: 2100  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16.5 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (12 x 16 GB 2Rx4 PC4-2666V-R, running at 2400)  
 Storage: 1 x SATA SSD, 960 GB  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP2 4.4.114-92.64-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.27.0 for D3853-A1x. Released Mar-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4116,  
2.10GHz

**SPECrate2017\_fp\_base = 117**

**SPECrate2017\_fp\_peak = Not Run**

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2018

Hardware Availability: Dec-2017

Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1334	361	1339	359	<b><u>1337</u></b>	<b><u>360</u></b>							
507.cactubSSN_r	48	592	103	<b><u>591</u></b>	<b><u>103</u></b>	591	103							
508.namd_r	48	<b><u>548</u></b>	<b><u>83.3</u></b>	547	83.4	549	83.1							
510.parest_r	48	1663	75.5	1669	75.2	<b><u>1663</u></b>	<b><u>75.5</u></b>							
511.povray_r	48	<b><u>834</u></b>	<b><u>134</u></b>	835	134	830	135							
519.lbm_r	48	601	84.2	<b><u>602</u></b>	<b><u>84.1</u></b>	602	84.0							
521.wrf_r	48	769	140	<b><u>767</u></b>	<b><u>140</u></b>	763	141							
526.blender_r	48	638	115	<b><u>640</u></b>	<b><u>114</u></b>	641	114							
527.cam4_r	48	783	107	<b><u>784</u></b>	<b><u>107</u></b>	785	107							
538.imagick_r	48	<b><u>723</u></b>	<b><u>165</u></b>	723	165	723	165							
544.nab_r	48	<b><u>558</u></b>	<b><u>145</u></b>	561	144	556	145							
549.fotonik3d_r	48	<b><u>1665</u></b>	<b><u>112</u></b>	1664	112	1665	112							
554.roms_r	48	1192	64.0	<b><u>1196</u></b>	<b><u>63.8</u></b>	1200	63.5							

**SPECrate2017\_fp\_base = 117**

**SPECrate2017\_fp\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter: nohz_full=1-47
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Process tuning settings:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017/lib/ia32:/home/Benchmark/speccpu2017/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017/je5.0.1-32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017/je5.0.1-64"
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4116,  
2.10GHz

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2018

Test Sponsor: Fujitsu

Hardware Availability: Dec-2017

Tested by: Fujitsu

Software Availability: Mar-2018

## General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled

Intel Virtualization Technology = Disabled

Power Technology = Custom

HWPM Support = Disabled

Uncore Frequency Scaling = Disabled

Sub NUMA Clustering = Enabled

Stale AtoS = Enabled

LLC dead line alloc = Disabled

Sysinfo program /home/Benchmark/speccpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on CX2550M4 Mon Apr 23 22:50:28 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4116,  
2.10GHz

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2018

Test Sponsor: Fujitsu

Hardware Availability: Dec-2017

Tested by: Fujitsu

Software Availability: Mar-2018

## Platform Notes (Continued)

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   2
Core(s) per socket:   12
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
Stepping:               4
CPU MHz:               2101.000
CPU max MHz:           2101.0000
CPU min MHz:           800.0000
BogoMIPS:              4190.11
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              16896K
NUMA node0 CPU(s):    0-2,6-8,24-26,30-32
NUMA node1 CPU(s):    3-5,9-11,27-29,33-35
NUMA node2 CPU(s):    12-14,18-20,36-38,42-44
NUMA node3 CPU(s):    15-17,21-23,39-41,45-47
Flags:     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxtsw spec_ctrl retrpline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqmq_llc cqmq_occrap_llc
```

/proc/cpuinfo cache data  
cache size : 16896 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 24 25 26 30 31 32
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4116,  
2.10GHz

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2018

Test Sponsor: Fujitsu

Hardware Availability: Dec-2017

Tested by: Fujitsu

Software Availability: Mar-2018

## Platform Notes (Continued)

```
node 0 size: 46993 MB
node 0 free: 46746 MB
node 1 cpus: 3 4 5 9 10 11 27 28 29 33 34 35
node 1 size: 48379 MB
node 1 free: 48164 MB
node 2 cpus: 12 13 14 18 19 20 36 37 38 42 43 44
node 2 size: 48379 MB
node 2 free: 48194 MB
node 3 cpus: 15 16 17 21 22 23 39 40 41 45 46 47
node 3 size: 48261 MB
node 3 free: 48082 MB
node distances:
node    0    1    2    3
  0: 10   11   23   23
  1: 11   10   23   23
  2: 23   23   10   11
  3: 23   23   11   10

From /proc/meminfo
MemTotal:           196621924 kB
HugePages_Total:      0
Hugepagesize:        2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux CX2550M4 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 23 14:02
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4116,  
2.10GHz

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2018

Hardware Availability: Dec-2017

Software Availability: Mar-2018

## Platform Notes (Continued)

SPEC is set to: /home/Benchmark/speccpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	852G	17G	836G	2%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU V1.0.0.0 R1.27.0 for D3853-A1x 03/15/2018

Memory:

12x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666, configured at 2400  
4x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd\_r(base) 510.parest\_r(base)

-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray\_r(base) 526.blender\_r(base)

-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN\_r(base)

-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4116,  
2.10GHz

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2018

Test Sponsor: Fujitsu

Hardware Availability: Dec-2017

Tested by: Fujitsu

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CC 521.wrf_r(base) 527.cam4_r(base)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort

Benchmarks using both Fortran and C:

fort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccfort



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4116,  
2.10GHz

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2018

Hardware Availability: Dec-2017

Software Availability: Mar-2018

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactubSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4116,  
2.10GHz

SPECrate2017\_fp\_base = 117

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2018

Hardware Availability: Dec-2017

Software Availability: Mar-2018

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-04-23 09:50:27-0400.

Report generated on 2018-10-31 17:17:07 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-29.