




SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

SPECrate2017_fp_base = 33.9

SPECrate2017_fp_peak = Not Run

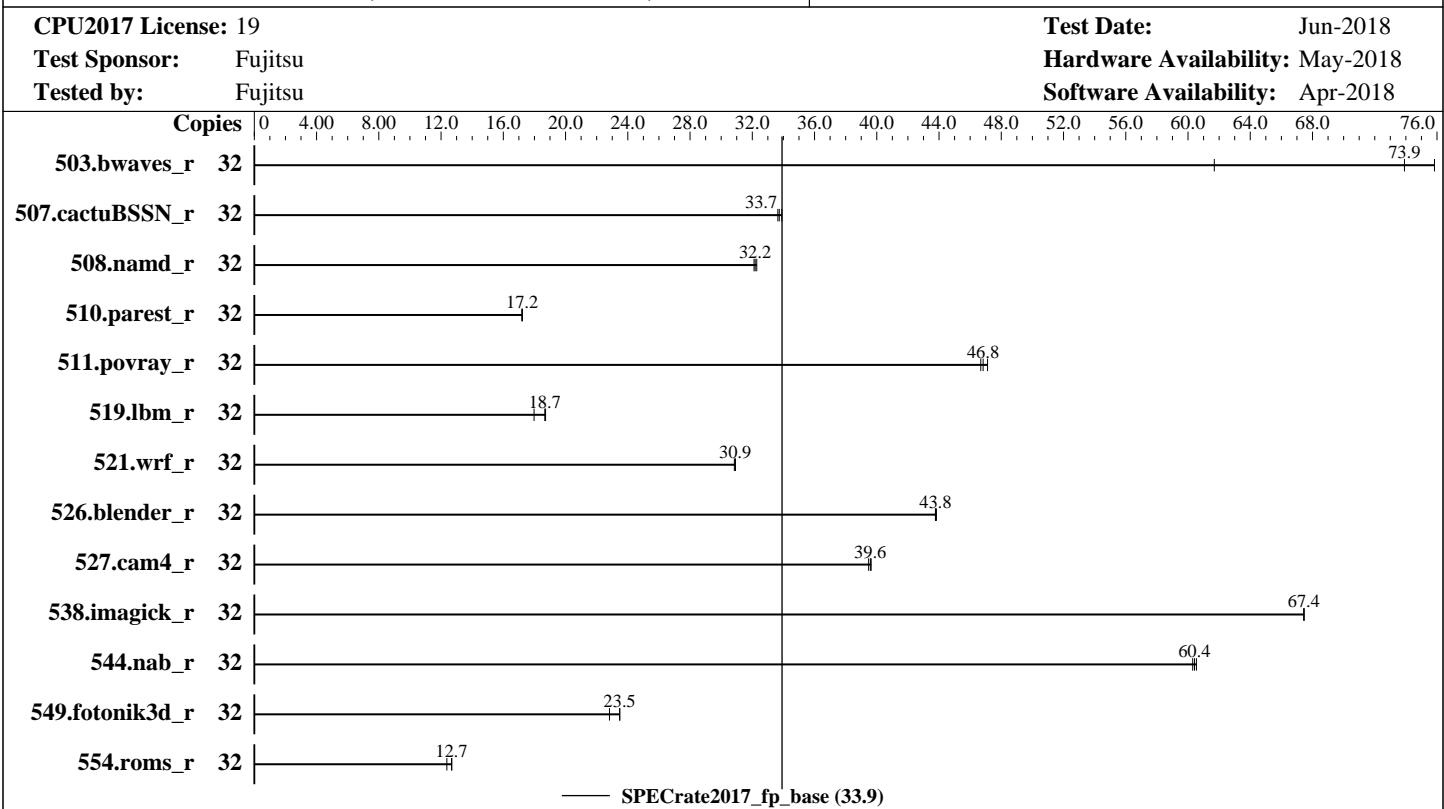

Hardware		Software	
CPU Name:	Intel Xeon D-1571	OS:	SUSE Linux Enterprise Server 12 SP2
Max MHz.:	2100		4.4.114-92.64-default
Nominal:	1300	Compiler:	C/C++: Version 18.0.1.163 of Intel C/C++
Enabled:	16 cores, 1 chip, 2 threads/core		Compiler for Linux;
Orderable:	1 chip		Fortran: Version 18.0.1.163 of Intel Fortran
Cache L1:	32 KB I + 32 KB D on chip per core	Parallel:	Compiler for Linux
L2:	256 KB I+D on chip per core	Firmware:	American Megatrends BIOS Version C419A020. Released Apr-2018
L3:	24 MB I+D on chip per chip	File System:	xfs
Other:	None	System State:	Run level 3 (multi-user)
Memory:	128 GB (4 x 32 GB 2Rx4 PC4-2400T-R)	Base Pointers:	64-bit
Storage:	1 x SAS HDD, 1 TB, 7200 RPM	Peak Pointers:	Not Applicable
Other:	None	Other:	None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

SPECrate2017_fp_base = 33.9

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: May-2018
Software Availability: Apr-2018

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	5202	61.7	4342	73.9	4231	75.8									
507.cactusBSSN_r	32	1204	33.6	1201	33.7	1195	33.9									
508.namd_r	32	942	32.3	947	32.1	945	32.2									
510.parest_r	32	4862	17.2	4869	17.2	4862	17.2									
511.povray_r	32	1595	46.8	1586	47.1	1601	46.7									
519.lbm_r	32	1876	18.0	1802	18.7	1807	18.7									
521.wrf_r	32	2319	30.9	2324	30.8	2319	30.9									
526.blender_r	32	1113	43.8	1113	43.8	1112	43.8									
527.cam4_r	32	1412	39.6	1418	39.5	1414	39.6									
538.imagick_r	32	1180	67.4	1180	67.4	1180	67.5									
544.nab_r	32	891	60.4	893	60.3	890	60.5									
549.fotonik3d_r	32	5464	22.8	5311	23.5	5311	23.5									
554.roms_r	32	4110	12.4	4007	12.7	4012	12.7									

SPECrate2017_fp_base = 33.9

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
cpu idle state set with:
cpupower idle-set -d 1

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu/speccpu2017-ic18.1-20171215/iccl8.1-lib/intel64"
Binaries compiled on a system with 4x Intel Xeon Platinum 8180 CPU + 768GB RAM
memory using SUSE Linux Enterprise Server 12 SP2
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 1 > /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

SPECrate2017_fp_base = 33.9

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: May-2018
Software Availability: Apr-2018

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Intel Virtualization Technology = Disabled
HWP Support = Disabled
Sysinfo program /home/SPECCpu/speccpu2017-ic18.1-20171215/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-ha7w Wed Jun 20 07:43:06 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU D-1571 @ 1.30GHz
1 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
Model: 86
Model name: Intel(R) Xeon(R) CPU D-1571 @ 1.30GHz

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX1430 M1, Intel Xeon D-1571, 1.30GHz

SPECrate2017_fp_base = 33.9

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2018

Tested by: Fujitsu

Software Availability: Apr-2018

Platform Notes (Continued)

Stepping: 4
CPU MHz: 1916.814
CPU max MHz: 2100.0000
CPU min MHz: 800.0000
BogoMIPS: 2600.11
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 24576K
NUMA node0 CPU(s): 0-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm intel_pt spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdseed adx smap xsaveopt cqmq_llc cqmq_occup_llc

/proc/cpuinfo cache data
cache size : 24576 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 0 size: 128655 MB
node 0 free: 127991 MB
node distances:
node 0
0: 10

From /proc/meminfo
MemTotal: 131743552 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX1430 M1, Intel Xeon D-1571, 1.30GHz

SPECrate2017_fp_base = 33.9

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: Apr-2018

Platform Notes (Continued)

```
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-ha7w 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 20 07:39

SPEC is set to: /home/SPECcpu/speccpu2017-ic18.1-20171215
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/md126p4    xfs   889G   18G  872G   2% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. C419A020 04/03/2018
Memory:
 4x Hynix Semiconductor HMA84GR7AFR4N-UH 32 GB 2 rank 2400

(End of data from sysinfo program)
```

Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
icc (ICC) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----
icpc (ICC) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX1430 M1, Intel Xeon D-1571, 1.30GHz

SPECrate2017_fp_base = 33.9

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: Apr-2018

Compiler Version Notes (Continued)

=====

CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.1 20171018

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.1 20171018

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN_r(base)

icpc (ICC) 18.0.1 20171018

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.1 20171018

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.1 20171018

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

ifort (IFORT) 18.0.1 20171018

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.1 20171018

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.1 20171018

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX1430 M1, Intel Xeon D-1571, 1.30GHz

SPECrate2017_fp_base = 33.9

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: Apr-2018

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX1430 M1, Intel Xeon D-1571, 1.30GHz

SPECrate2017_fp_base = 33.9

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: Apr-2018

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevD.xml>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX1430 M1, Intel Xeon D-1571, 1.30GHz

SPECrate2017_fp_base = 33.9

SPECrate2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: Apr-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-19 18:43:05-0400.

Report generated on 2018-10-31 18:57:01 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-10.