



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Gold 6222V, 1.80GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.


SPECrate2017_int_base = 201

SPECrate2017_int_peak = 209

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

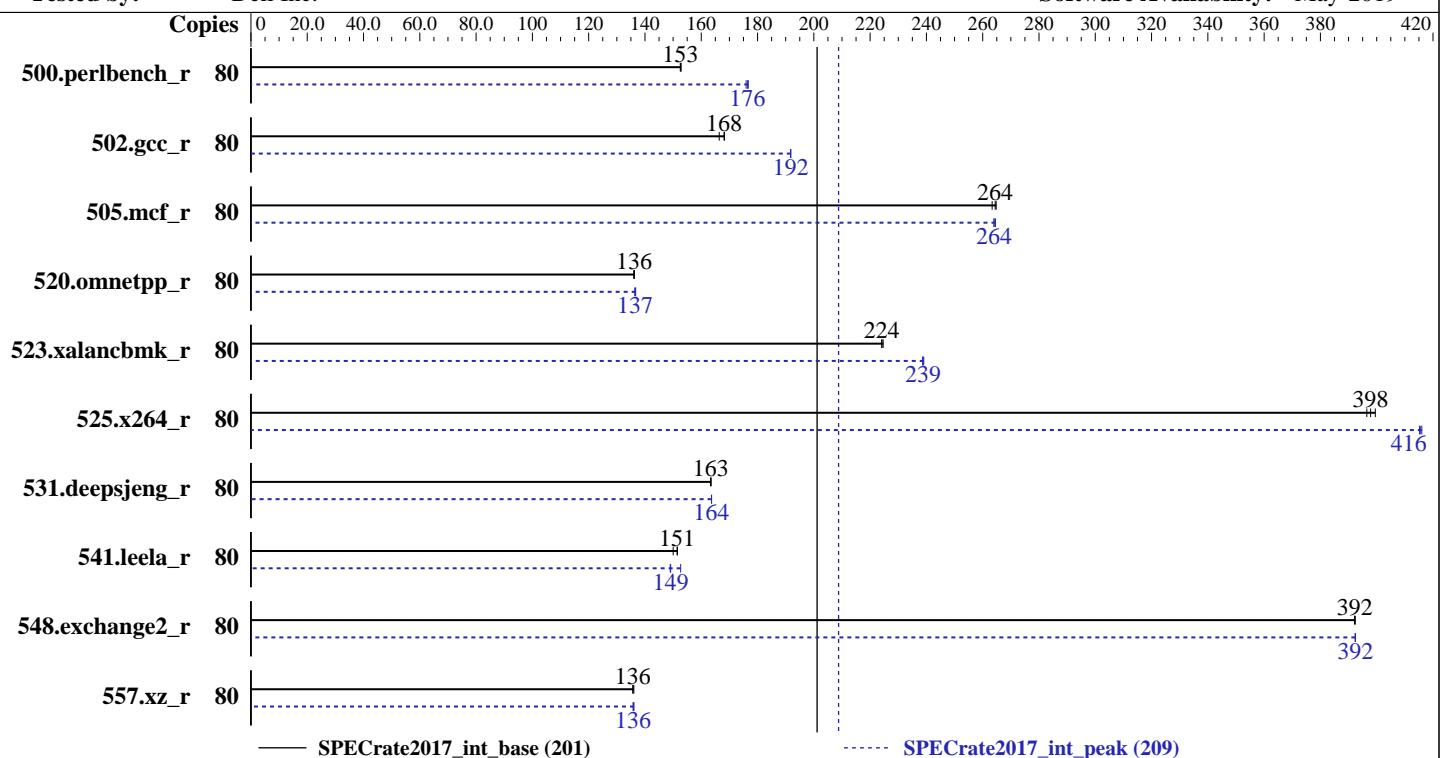

— SPECrate2017_int_base (201)

··· SPECrate2017_int_peak (209)

Hardware

CPU Name: Intel Xeon Gold 6222V
Max MHz.: 3600
Nominal: 1800
Enabled: 40 cores, 2 chips, 2 threads/core
Orderable: 2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 27.5 MB I+D on chip per chip
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)
Storage: 1 x 480 GB SATA SSD
Other: None

Software

OS: Ubuntu 18.04.2 LTS
Compiler: kernel 4.15.0-46-generic
C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel: No
Firmware: Version 2.2.7 released Apr-2019
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 201

SPECrate2017_int_peak = 209

CPU2017 License: 55
 Test Sponsor: Dell Inc.
 Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	834	153	835	153	833	153	80	721	177	724	176	722	176
502.gcc_r	80	681	166	674	168	673	168	80	591	192	591	192	591	192
505.mcf_r	80	489	264	488	265	491	263	80	490	264	489	265	490	264
520.omnetpp_r	80	772	136	771	136	771	136	80	770	136	769	137	768	137
523.xalancbmk_r	80	377	224	376	225	377	224	80	354	239	353	239	354	239
525.x264_r	80	351	400	352	398	353	396	80	337	416	337	415	337	416
531.deepsjeng_r	80	561	163	561	163	561	164	80	560	164	560	164	560	164
541.leela_r	80	883	150	875	151	874	152	80	889	149	888	149	868	153
548.exchange2_r	80	534	392	535	392	534	392	80	534	392	534	392	534	392
557.xz_r	80	637	136	637	136	635	136	80	635	136	636	136	636	136

SPECrate2017_int_base = 201

SPECrate2017_int_peak = 209

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017_int_base = 201

SPECCrate2017_int_peak = 209

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

Platform Notes

BIOS settings:

ADDDC setting disabled

Virtualization Technology disabled

DCU Streamer Prefetcher disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on intel-sut Tue Jul 30 22:33:54 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6222V CPU @ 1.80GHz

2 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 80

On-line CPU(s) list: 0-79

Thread(s) per core: 2

Core(s) per socket: 20

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 6222V CPU @ 1.80GHz

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 201

SPECrate2017_int_peak = 209

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jul-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

```

Stepping: 7
CPU MHz: 828.994
BogoMIPS: 3600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76
node 0 size: 95146 MB
node 0 free: 94841 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77
node 1 size: 96743 MB
node 1 free: 96268 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78
node 2 size: 96764 MB
node 2 free: 96547 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79
node 3 size: 96762 MB
node 3 free: 96515 MB
node distances:
node 0 1 2 3
 0: 10 21 11 21
 1: 21 10 21 11
 2: 11 21 10 21

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017_int_base = 201

SPECCrate2017_int_peak = 209

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

Platform Notes (Continued)

3: 21 11 21 10

```
From /proc/meminfo
MemTotal:      394666960 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
NAME="Ubuntu"
VERSION="18.04.2 LTS (Bionic Beaver)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 18.04.2 LTS"
VERSION_ID="18.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux intel-sut 4.15.0-46-generic #49-Ubuntu SMP Wed Feb 6 09:33:07 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

run-level 3 Jul 30 17:14

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  439G   31G  386G   8%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.2.7 04/23/2019

Memory:

```
11x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2400
1x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2400
12x Not Specified Not Specified
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 201

SPECrate2017_int_peak = 209

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jul-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 502.gcc_r(peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```



```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
 Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```



```
=====
CC 500.perlbench_r(peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
 Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```



```
=====
CXXC 523.xalancbmk_r(peak)
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```



```
=====
CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
  peak) 541.leela_r(base, peak)
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
 Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 201

SPECrate2017_int_peak = 209

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jul-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Compiler Version Notes (Continued)

```
=====
FC 548.exchange2_r(base, peak)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lgkmalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Gold 6222V, 1.80GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_int_base = 201

SPECrate2017_int_peak = 209

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Base Optimization Flags (Continued)

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

```
icpc -m64
```

523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Gold 6222V, 1.80GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_int_base = 201

SPECrate2017_int_peak = 209

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740c (Intel Xeon Gold 6222V, 1.80GHz)

SPECCrate2017_int_base = 201

SPECCrate2017_int_peak = 209

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.Ou1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.Ou1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-07-30 18:33:54-0400.

Report generated on 2019-08-21 12:05:54 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-20.