



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7302 , 3.0GHz)

SPECrate®2017\_int\_base = 244  
SPECrate®2017\_int\_peak = 257

CPU2017 License: 9082


Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

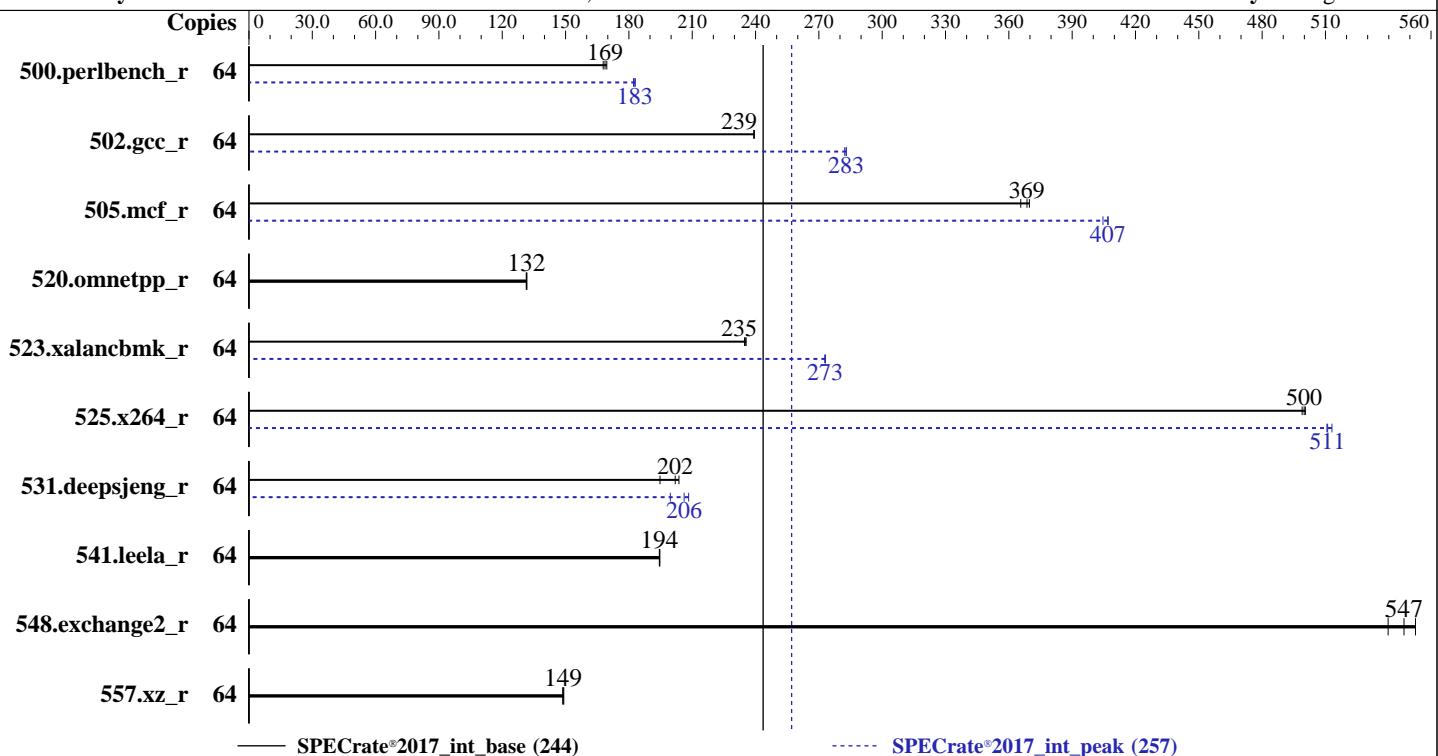

## Hardware

CPU Name: AMD EPYC 7302  
Max MHz: 3300  
Nominal: 3000  
Enabled: 32 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 128 MB I+D on chip per chip, 16 MB shared / 2 cores  
Other: None  
Memory: 1 TB (16 x 64 GB 4DRx4 PC4-3200AA-L)  
Storage: 1 x 1.92 TB SATA SSD  
Other: None

## Software

OS: Ubuntu 19.04 (x86\_64)  
Compiler: kernel version  
Parallel: 5.0.0-16-generic  
Firmware: C/C++/Fortran: Version 2.0.0 of AOCC  
File System: No  
System State: Version R05 released Aug-2019  
Base Pointers: ext4  
Peak Pointers: Run level 5 (multi-user)  
Other: 64-bit  
Power Management: Peak Pointers: 32/64-bit  
Power Management: jemalloc: jemalloc memory allocator library v5.2.0  
Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7302 , 3.0GHz)

**SPECrate®2017\_int\_base = 244**  
**SPECrate®2017\_int\_peak = 257**

CPU2017 License: 9082

Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	<b>604</b>	<b>169</b>	607	168	601	170	64	<b>557</b>	<b>183</b>	557	183	559	182
502.gcc_r	64	<b>379</b>	<b>239</b>	379	239	379	239	64	321	282	<b>320</b>	<b>283</b>	320	283
505.mcf_r	64	283	366	280	370	<b>281</b>	<b>369</b>	64	254	407	256	405	<b>254</b>	<b>407</b>
520.omnetpp_r	64	638	132	<b>638</b>	<b>132</b>	639	131	64	638	132	<b>638</b>	<b>132</b>	639	131
523.xalancbmk_r	64	<b>287</b>	<b>235</b>	287	236	288	235	64	247	273	248	273	<b>248</b>	<b>273</b>
525.x264_r	64	225	499	<b>224</b>	<b>500</b>	224	500	64	218	513	<b>219</b>	<b>511</b>	219	511
531.deepsjeng_r	64	360	204	<b>363</b>	<b>202</b>	377	195	64	352	208	367	200	<b>356</b>	<b>206</b>
541.leela_r	64	544	195	545	194	<b>545</b>	<b>194</b>	64	544	195	545	194	<b>545</b>	<b>194</b>
548.exchange2_r	64	<b>306</b>	<b>547</b>	303	553	311	540	64	<b>306</b>	<b>547</b>	303	553	311	540
557.xz_r	64	465	149	<b>464</b>	<b>149</b>	463	149	64	465	149	<b>464</b>	<b>149</b>	463	149

**SPECrate®2017\_int\_base = 244**

**SPECrate®2017\_int\_peak = 257**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2017/amd\_rate\_aocc200\_rome\_B\_lib/64;/root/cpu2017/amd\_rate\_aocc200\_rome\_B\_lib/32:"

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90

(AMD EPYC 7302 , 3.0GHz)

SPECrate®2017\_int\_base = 244

SPECrate®2017\_int\_peak = 257

CPU2017 License: 9082

Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## General Notes (Continued)

MALLOC\_CONF = "retain:true"

Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fllto  
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS settings:

cTDP = 180

Determinism Slider set to Power

SMT set to auto

IOMMU set to enable

Package Power Limit set to 180

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on test Fri Aug 30 19:36:06 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7302 16-Core Processor

2 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90

(AMD EPYC 7302 , 3.0GHz)

SPECrate®2017\_int\_base = 244

SPECrate®2017\_int\_peak = 257

CPU2017 License: 9082

Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Platform Notes (Continued)

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
Address sizes:        43 bits physical, 48 bits virtual
CPU(s):               64
On-line CPU(s) list: 0-63
Thread(s) per core:  2
Core(s) per socket:  16
Socket(s):            2
NUMA node(s):         8
Vendor ID:            AuthenticAMD
CPU family:           23
Model:                49
Model name:           AMD EPYC 7302 16-Core Processor
Stepping:              0
CPU MHz:              3166.579
CPU max MHz:          3000.0000
CPU min MHz:          1500.0000
BogoMIPS:              5999.89
Virtualization:       AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              16384K
NUMA node0 CPU(s):    0-3,32-35
NUMA node1 CPU(s):    4-7,36-39
NUMA node2 CPU(s):    8-11,40-43
NUMA node3 CPU(s):    12-15,44-47
NUMA node4 CPU(s):    16-19,48-51
NUMA node5 CPU(s):    20-23,52-55
NUMA node6 CPU(s):    24-27,56-59
NUMA node7 CPU(s):    28-31,60-63
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                       pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                       constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmpfperf pnpi
                       pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
                       rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                       osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
                       cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmil avx2
                       smep bmi2 cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
                       xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr
                       wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
                       decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
                       overflow_recov succor smca
```

/proc/cpuinfo cache data

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90

(AMD EPYC 7302 , 3.0GHz)

SPECrate®2017\_int\_base = 244

SPECrate®2017\_int\_peak = 257

CPU2017 License: 9082

Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Platform Notes (Continued)

cache size : 512 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 128898 MB
node 0 free: 128558 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 129016 MB
node 1 free: 128663 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 129016 MB
node 2 free: 128722 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 129004 MB
node 3 free: 128690 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 129016 MB
node 4 free: 128588 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 129016 MB
node 5 free: 128679 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 129016 MB
node 6 free: 128686 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 128991 MB
node 7 free: 128644 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10
```

From /proc/meminfo

```
MemTotal:      1056746064 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

/usr/bin/lsb\_release -d  
Ubuntu 19.04

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90

(AMD EPYC 7302 , 3.0GHz)

SPECrate®2017\_int\_base = 244

SPECrate®2017\_int\_peak = 257

CPU2017 License: 9082

Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="19.04 (Disco Dingo)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 19.04"
  VERSION_ID="19.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"

uname -a:
Linux test 5.0.0-16-generic #17-Ubuntu SMP Wed May 15 10:52:21 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: conditional, RSB filling
```

run-level 5 Aug 30 19:33

```
SPEC is set to: /root/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  1.8T   43G  1.6T   3%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS GIGABYTE R05 08/21/2019

Memory:

```
16x Samsung M386A8K40DM2-CWE 64 kB 4 rank 3200
16x Unknown Unknown
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7302 , 3.0GHz)

SPECrate®2017\_int\_base = 244  
SPECrate®2017\_int\_peak = 257

CPU2017 License: 9082

Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C	500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
	525.x264_r(base, peak) 557.xz_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C	502.gcc_r(peak)
---	-----------------

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C	500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
	525.x264_r(base, peak) 557.xz_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++	523.xalancbmk_r(peak)
-----	-----------------------

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90

(AMD EPYC 7302 , 3.0GHz)

SPECrate®2017\_int\_base = 244

SPECrate®2017\_int\_peak = 257

CPU2017 License: 9082

Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
C++      | 523.xalancbmk_r(peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

```
Target: i386-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
Fortran | 548.exchange2_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

<b>GIGA-BYTE TECHNOLOGY CO., LTD.</b> <b>R282-Z90</b> (AMD EPYC 7302 , 3.0GHz)	<b>SPECrate®2017_int_base = 244</b> <b>SPECrate®2017_int_peak = 257</b>
<b>CPU2017 License:</b> 9082 <b>Test Sponsor:</b> GIGA-BYTE TECHNOLOGY CO., LTD. <b>Tested by:</b> GIGA-BYTE TECHNOLOGY CO., LTD.	<b>Test Date:</b> Aug-2019 <b>Hardware Availability:</b> Aug-2019 <b>Software Availability:</b> Aug-2019

## Base Compiler Invocation

C benchmarks:

clang

## C++ benchmarks:

clang++

## Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc  
-lflang
```

## C++ benchmarks:

**(Continued on next page)**



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7302 , 3.0GHz)

SPECrate®2017\_int\_base = 244  
SPECrate®2017\_int\_peak = 257

CPU2017 License: 9082

Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90

(AMD EPYC 7302 , 3.0GHz)

SPECrate®2017\_int\_base = 244

SPECrate®2017\_int\_peak = 257

CPU2017 License: 9082

Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver2  
-mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -lmvec -lamdlibm -ljemalloc  
-lflang
```

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -fgnu89-inline -ljemalloc
```

```
505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -lmvec -lamdlibm -ljemalloc  
-lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R282-Z90

(AMD EPYC 7302 , 3.0GHz)

SPECrate®2017\_int\_base = 244

SPECrate®2017\_int\_peak = 257

CPU2017 License: 9082

Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -flv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -ljemalloc

531.deepsjeng\_r: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -flv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc  
-lflang

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

502.gcc\_r: -L/sppo/dev/cpu2017/amd\_rate\_aocc200\_rome/amd\_rate\_aocc200\_rome\_B\_lib/32

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R282-Z90  
(AMD EPYC 7302 , 3.0GHz)

SPECrate®2017\_int\_base = 244  
SPECrate®2017\_int\_peak = 257

CPU2017 License: 9082

Test Date: Aug-2019

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Aug-2019

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Aug-2019

## Peak Other Flags (Continued)

C++ benchmarks:

523.xalancbmk\_r: -L/sppo/dev/cpu2017/amd\_rate\_aocc200\_rome/amd\_rate\_aocc200\_rome\_B\_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.1-Rome-B.2019-09-17.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.1-Rome-B.2019-09-17.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-30 07:36:05-0400.

Report generated on 2019-09-17 16:08:33 by CPU2017 PDF formatter v6255.

Originally published on 2019-09-17.