



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6240Y,
2.60GHz)

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 235

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Oct-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

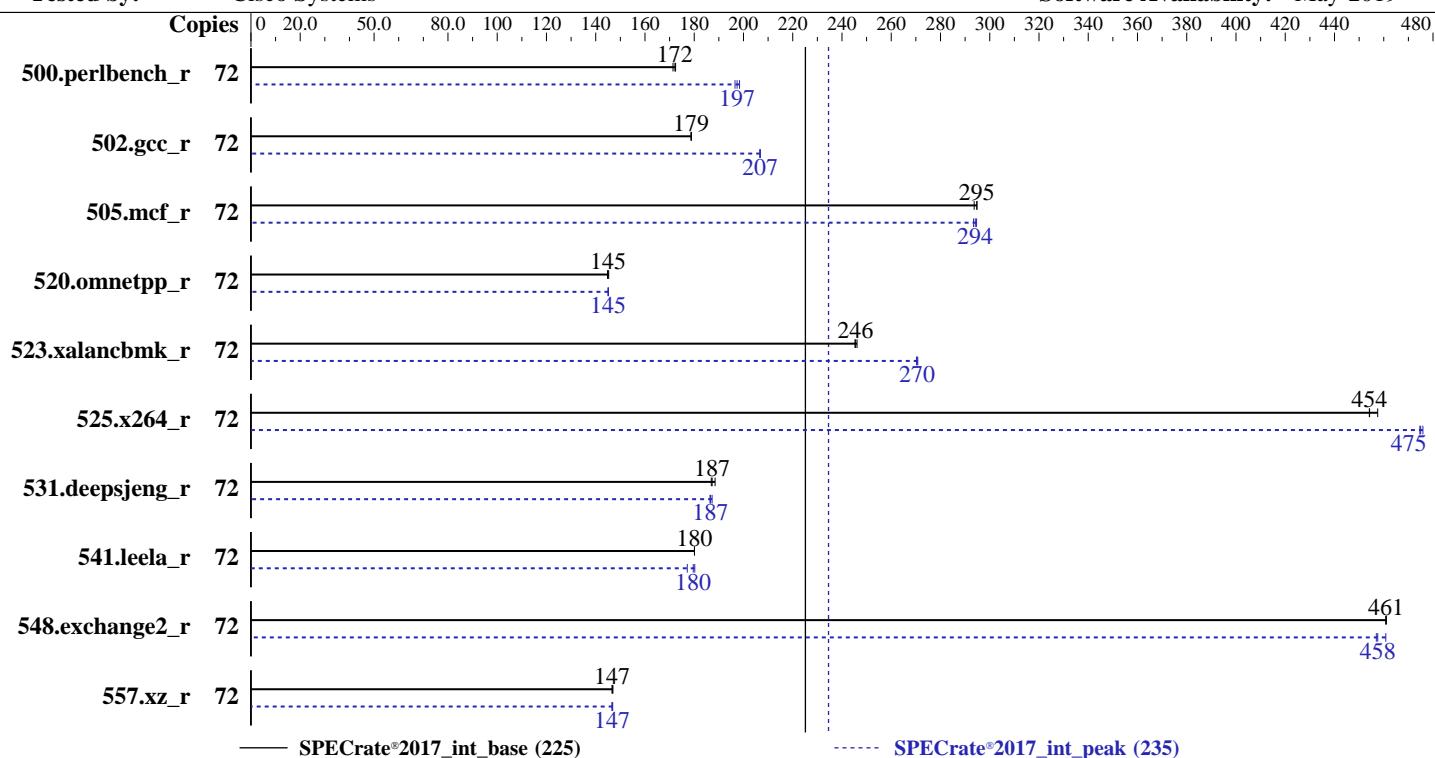

Hardware

CPU Name: Intel Xeon Gold 6240Y
 Max MHz: 3900
 Nominal: 2600
 Enabled: 36 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933V-R)
 Storage: 1 x 240 GB M.2 SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64)
 4.12.14-23-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 4.0.4g released Jul-2019
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: default



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6240Y,
2.60GHz)

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 235

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	72	666	172	665	172	669	171	72	581	197	578	198	583	197
502.gcc_r	72	570	179	570	179	570	179	72	493	207	493	207	493	207
505.mcf_r	72	396	294	395	295	395	295	72	397	293	396	294	395	295
520.omnetpp_r	72	650	145	652	145	652	145	72	651	145	651	145	651	145
523.xalancbmk_r	72	310	245	310	246	309	246	72	281	270	281	271	281	270
525.x264_r	72	278	454	278	454	276	458	72	265	475	266	475	265	476
531.deepsjeng_r	72	441	187	438	188	441	187	72	442	187	441	187	443	186
541.leela_r	72	662	180	662	180	662	180	72	662	180	664	180	673	177
548.exchange2_r	72	409	461	409	461	409	461	72	412	458	413	457	409	461
557.xz_r	72	529	147	530	147	530	147	72	529	147	530	147	530	147

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 235

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-
    32"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6240Y,
2.60GHz)

SPECCrate®2017_int_base = 225

SPECCrate®2017_int_peak = 235

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Enabled

SNC set to Enabled

IMC Interleaving set to 1-way Interleave

Patrol Scrub set to Disabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on linux-cud8 Thu Oct 24 20:50:41 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6240C CPU @ 2.60GHz
        2 "physical id"s (chips)
        72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               72
On-line CPU(s) list: 0-71
Thread(s) per core:  2
Core(s) per socket:  18
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6240Y,
2.60GHz)

SPECRate®2017_int_base = 225

SPECRate®2017_int_peak = 235

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

Platform Notes (Continued)

Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6240C CPU @ 2.60GHz
Stepping: 6
CPU MHz: 2600.000
CPU max MHz: 3900.0000
CPU min MHz: 1000.0000
BogoMIPS: 5200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-2,5,6,9,10,14,15,36-38,41,42,45,46,50,51
NUMA node1 CPU(s): 3,4,7,8,11-13,16,17,39,40,43,44,47-49,52,53
NUMA node2 CPU(s): 18-20,23,24,27,28,32,33,54-56,59,60,63,64,68,69
NUMA node3 CPU(s): 21,22,25,26,29-31,34,35,57,58,61,62,65-67,70,71
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid aperfmpfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local ibpb ibrs stibp dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni arch_capabilities ssbd

/proc/cpuinfo cache data
cache size : 25344 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 9 10 14 15 36 37 38 41 42 45 46 50 51
node 0 size: 192103 MB
node 0 free: 191734 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 39 40 43 44 47 48 49 52 53
node 1 size: 193527 MB
node 1 free: 193108 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 54 55 56 59 60 63 64 68 69
node 2 size: 193527 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6240Y,
2.60GHz)

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 235

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

Platform Notes (Continued)

```
node 2 free: 193312 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 57 58 61 62 65 66 67 70 71
node 3 size: 193496 MB
node 3 free: 193286 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:      791198600 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15"
  VERSION_ID="15"
  PRETTY_NAME="SUSE Linux Enterprise Server 15"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15"

uname -a:
Linux linux-cud8 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          No status reported
Microarchitectural Data Sampling:            No status reported
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Indirect Branch Restricted
                                                Speculation, IBPB, IBRS_FW

run-level 3 Oct 24 20:45

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       btrfs  224G   38G  186G  17%  /home
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6240Y,
2.60GHz)

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 235

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

BIOS: Cisco Systems, Inc. C220M5.4.0.4g.0.0712190011 07/12/2019
Vendor: Cisco Systems Inc
Product: UCSC-C220-M5SX
Serial: WZP22380CRE

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x 0xCE00 M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

The marketing name for the processor in this result, which appears in the CPU name and hardware model areas, is different from sysinfo because a pre-production processor was used. The pre-production processor differs from the production processor in name only.

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6240Y,
2.60GHz)

SPECRate®2017_int_base = 225

SPECRate®2017_int_peak = 235

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

Compiler Version Notes (Continued)

```
=====  
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)  
| 525.x264_r(base, peak) 557.xz_r(base, peak)  
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 523.xalancbmk_r(peak)  
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)  
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)  
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 523.xalancbmk_r(peak)  
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)  
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)  
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
Fortran | 548.exchange2_r(base, peak)  
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6240Y,
2.60GHz)

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 235

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

Compiler Version Notes (Continued)

64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6240Y,
2.60GHz)

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 235

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

```
icpc -m64
```

523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6240Y,
2.60GHz)

SPECCrate®2017_int_base = 225

SPECCrate®2017_int_peak = 235

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

Peak Optimization Flags (Continued)

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/jet5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/jet5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6240Y,
2.60GHz)

SPECCrate®2017_int_base = 225

SPECCrate®2017_int_peak = 235

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.xml>

SPEC CPU and SPECCrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-24 23:50:41-0400.

Report generated on 2020-07-23 15:19:54 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-25.