



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10


(2.20 GHz, Intel Xeon Gold 6238R)

SPECspeed®2017_fp_base = 149

SPECspeed®2017_fp_peak = 149

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: Jun-2019

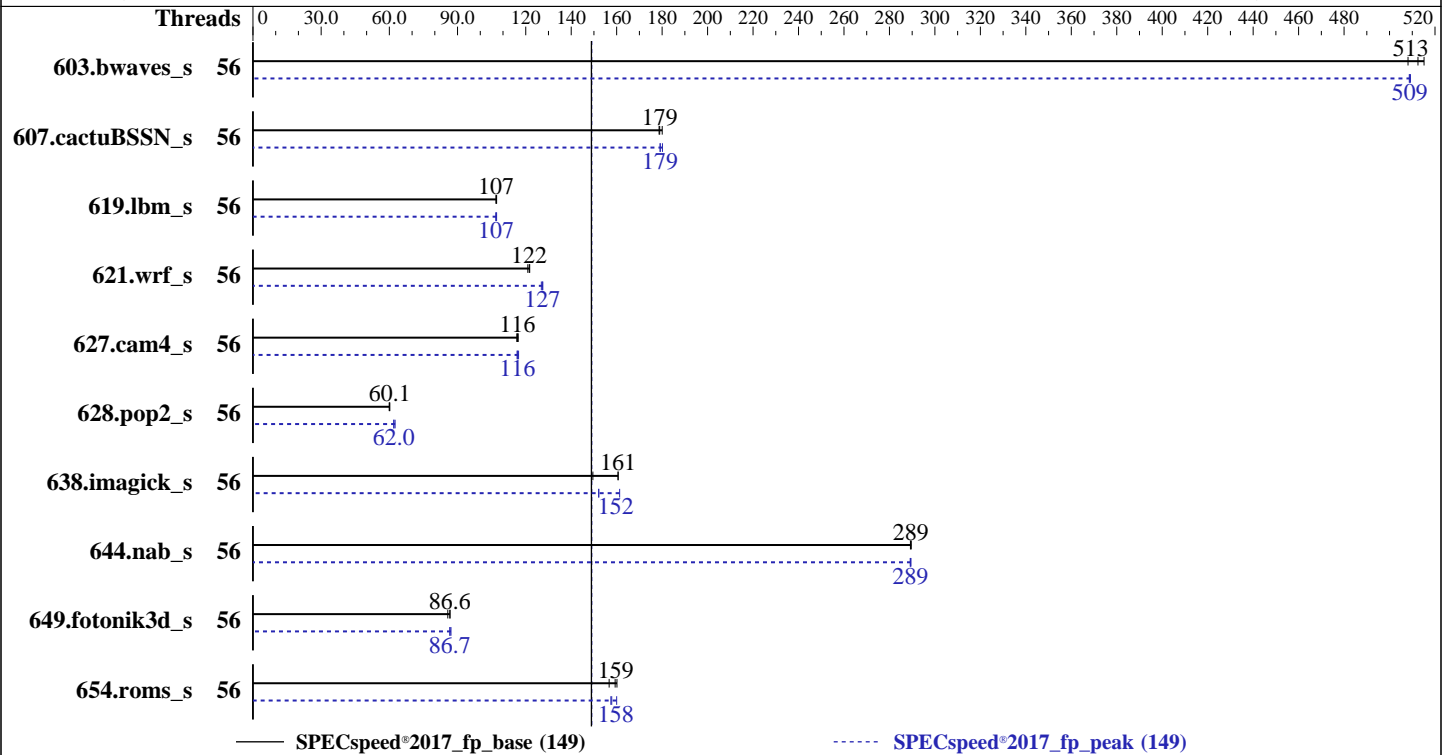

Hardware

CPU Name: Intel Xeon Gold 6238R
Max MHz: 4000
Nominal: 2200
Enabled: 56 cores, 2 chips
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 38.5 MB I+D on chip per chip
Other: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)
Storage: 1 x 400 GB SAS SSD, RAID 0
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86_64)
Kernel 4.12.14-195-default
Compiler: C/C++: Version 19.0.4.227 of Intel C/C++
Compiler Build 20190416 for Linux;
Fortran: Version 19.0.4.227 of Intel Fortran
Compiler Build 20190416 for Linux
Parallel: Yes
Firmware: HPE BIOS Version U32 2.22 (11/13/2019) released Feb-2020
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.20 GHz, Intel Xeon Gold 6238R)

SPECSpeed®2017_fp_base = 149

SPECSpeed®2017_fp_peak = 149

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: Jun-2019

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	115	515	116	508	115	513	56	116	509	116	509	116	509
607.cactuBSSN_s	56	93.2	179	92.6	180	93.3	179	56	92.5	180	93.0	179	93.1	179
619.lbm_s	56	48.9	107	49.0	107	49.0	107	56	48.9	107	49.0	107	49.0	107
621.wrf_s	56	109	122	109	121	109	122	56	104	127	104	127	104	128
627.cam4_s	56	76.0	117	76.4	116	76.2	116	56	75.9	117	76.3	116	76.1	116
628.pop2_s	56	197	60.1	198	59.9	197	60.2	56	192	61.9	191	62.0	190	62.5
638.imagick_s	56	89.8	161	96.5	150	89.8	161	56	89.4	161	94.8	152	94.9	152
644.nab_s	56	60.3	290	60.4	289	60.4	289	56	60.4	289	60.4	289	60.4	289
649.fotonik3d_s	56	106	85.7	105	86.6	105	86.7	56	105	86.7	105	87.1	105	86.6
654.roms_s	56	98.8	159	98.3	160	100	157	56	100	157	99.8	158	98.4	160

SPECSpeed®2017_fp_base = **149**

SPECSpeed®2017_fp_peak = **149**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=core,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.20 GHz, Intel Xeon Gold 6238R)

SPECspeed®2017_fp_base = 149

SPECspeed®2017_fp_peak = 149

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled
 Thermal Configuration set to Maximum Cooling
 Memory Patrol Scrubbing set to Disabled
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Enhanced Processor Performance set to Enabled
 Workload Profile set to General Peak Frequency Compute
 Energy/Performance Bias set to Balanced Power
 Workload Profile set to Custom
 Numa Group Size Optimization set to Flat
 Intel UPI Link Power Management set to Enabled

sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
 running on linux-z3xp Mon Feb 24 03:42:51 2020

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6238R CPU @ 2.20GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 28
siblings       : 28
physical 0:    : cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
physical 1:    : cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30

```

From lscpu:

```

Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
Address sizes:   46 bits physical, 48 bits virtual
CPU(s):          56
On-line CPU(s) list: 0-55
Thread(s) per core: 1
Core(s) per socket: 28
Socket(s):       2
NUMA node(s):   2
Vendor ID:       GenuineIntel
CPU family:      6

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.20 GHz, Intel Xeon Gold 6238R)

SPECspeed®2017_fp_base = 149

SPECspeed®2017_fp_peak = 149

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: Jun-2019

Platform Notes (Continued)

```

Model: 85
Model name: Intel(R) Xeon(R) Gold 6238R CPU @ 2.20GHz
Stepping: 7
CPU MHz: 2200.000
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 193095 MB
node 0 free: 190409 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 193529 MB
node 1 free: 186337 MB
node distances:
node 0 1
0: 10 21
1: 21 10

```

```

From /proc/meminfo
MemTotal: 395904228 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.20 GHz, Intel Xeon Gold 6238R)

SPECspeed®2017_fp_base = 149

SPECspeed®2017_fp_peak = 149

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Platform Notes (Continued)

From /etc/*release* /etc/*version*

os-release:

NAME="SLES"

VERSION="15-SP1"

VERSION_ID="15.1"

PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"

ID="sles"

ID_LIKE="suse"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:

Linux linux-z3xp 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)

x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Feb 23 23:10

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	371G	100G	271G	27%	/home

From /sys/devices/virtual/dmi/id

BIOS: HPE U32 11/13/2019

Vendor: HPE

Product: ProLiant DL360 Gen10

Product Family: ProLiant

Serial: MXQ94204PV

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2933

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.20 GHz, Intel Xeon Gold 6238R)

SPECspeed®2017_fp_base = 149

SPECspeed®2017_fp_peak = 149

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: Jun-2019

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.20 GHz, Intel Xeon Gold 6238R)

SPECspeed®2017_fp_base = 149

SPECspeed®2017_fp_peak = 149

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
```

```
607.cactuBSSN_s: -DSPEC_LP64
```

```
619.lbm_s: -DSPEC_LP64
```

```
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
-assume byterecl
```

```
638.imagick_s: -DSPEC_LP64
```

```
644.nab_s: -DSPEC_LP64
```

```
649.fotonik3d_s: -DSPEC_LP64
```

```
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
```

```
-nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.20 GHz, Intel Xeon Gold 6238R)

SPECspeed®2017_fp_base = 149

SPECspeed®2017_fp_peak = 149

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.20 GHz, Intel Xeon Gold 6238R)

SPECspeed®2017_fp_base = 149

SPECspeed®2017_fp_peak = 149

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Peak Optimization Flags (Continued)

649.fotonik3d_s: Same as 603.bwaves_s

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-qopenmp -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs
```

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-23 17:12:50-0500.

Report generated on 2020-03-17 16:17:23 by CPU2017 PDF formatter v6255.

Originally published on 2020-03-17.