



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 211

SPECrate®2017_int_peak = 219

CPU2017 License: 55


Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

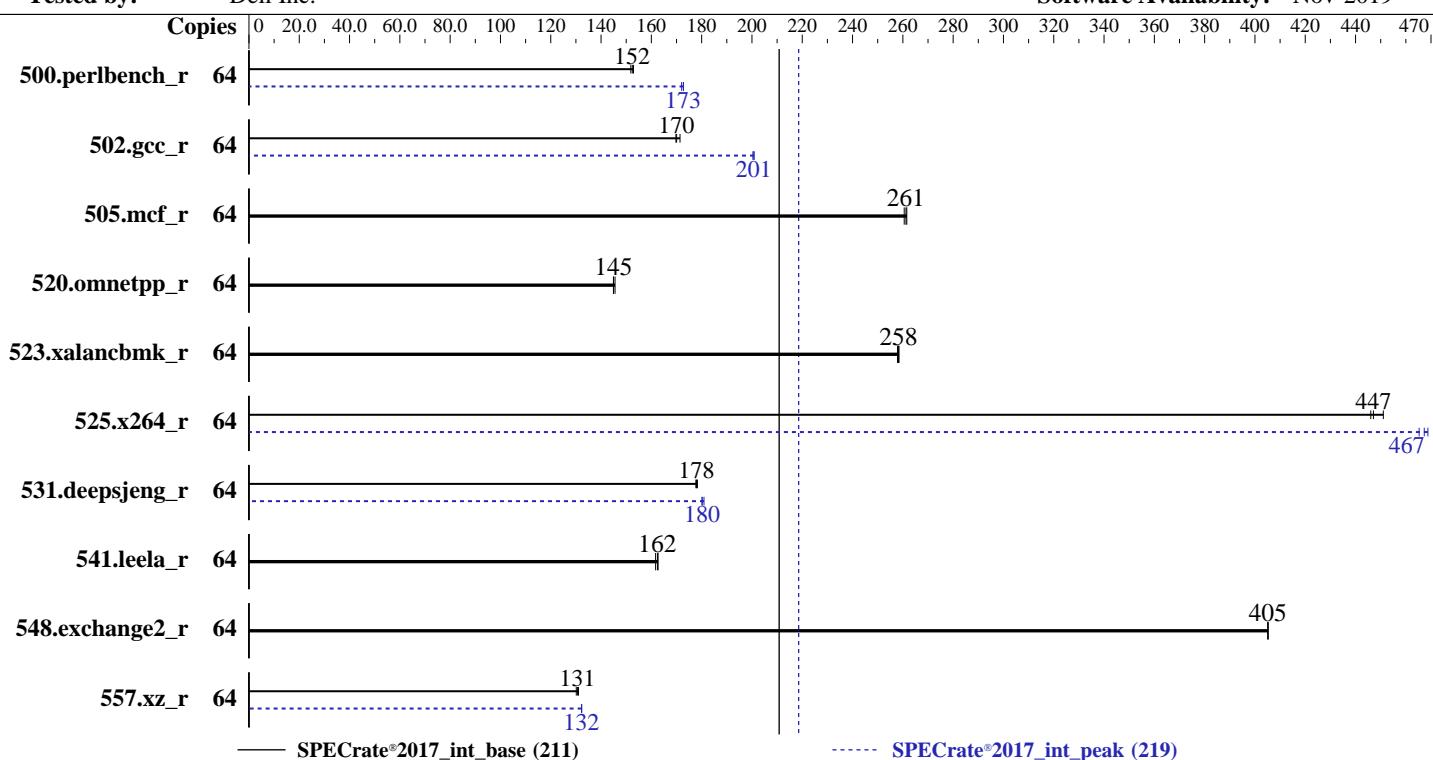

Hardware		Software	
CPU Name:	Intel Xeon Gold 6226R	OS:	Red Hat Enterprise Linux 8.1
Max MHz:	3900		kernel 4.18.0-147.el8.x86_64
Nominal:	2900	Compiler:	C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux;
Enabled:	32 cores, 2 chips, 2 threads/core		Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux
Orderable:	1,2 chips	Parallel:	No
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 2.7.1 released Feb-2020
L2:	1 MB I+D on chip per core	File System:	tmpfs
L3:	22 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	768 GB (24 x 32 GB 2Rx8 PC4-2933V-R, running at 2933)	Peak Pointers:	32/64-bit
Storage:	1 x 480 GB SATA SSD	Other:	jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 211

SPECrate®2017_int_peak = 219

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	671	152	666	153	668	152	64	592	172	590	173	590	173
502.gcc_r	64	533	170	534	170	529	171	64	452	200	451	201	451	201
505.mcf_r	64	395	262	396	261	397	261	64	395	262	396	261	397	261
520.omnetpp_r	64	579	145	577	146	579	145	64	579	145	577	146	579	145
523.xalancbmk_r	64	262	258	262	258	261	258	64	262	258	262	258	261	258
525.x264_r	64	251	446	251	447	248	451	64	240	467	241	465	239	469
531.deepsjeng_r	64	413	178	411	178	412	178	64	405	181	407	180	407	180
541.leela_r	64	655	162	653	162	651	163	64	655	162	653	162	651	163
548.exchange2_r	64	414	405	414	405	414	405	64	414	405	414	405	414	405
557.xz_r	64	529	131	528	131	531	130	64	523	132	523	132	523	132

SPECrate®2017_int_base = 211

SPECrate®2017_int_peak = 219

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/dev/shm/cpu2017/lib/intel64:/dev/shm/cpu2017/lib/ia32:/dev/shm/cpu2017
    /je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 211

SPECrate®2017_int_peak = 219

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub set to standard

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

UPI Prefetch enabled

LLC Prefetch disabled

Dead Line LLC Alloc enabled

Directory AtoS disabled

Sysinfo program /dev/shm/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Tue May 5 13:07:38 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
2 "physical id"s (chips)
64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 211

SPECCrate®2017_int_peak = 219

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Platform Notes (Continued)

```
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:  0-63
Thread(s) per core:   2
Core(s) per socket:   16
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
Stepping:               7
CPU MHz:               1914.607
CPU max MHz:           3900.0000
CPU min MHz:           1200.0000
BogoMIPS:              5800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              22528K
NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60
NUMA node1 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61
NUMA node2 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62
NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                       lm constant_tsc art arch_perfmon pebs bts rep_good nop1 xtopology nonstop_tsc cpuid
                       aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                       xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                       avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
                       invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                       flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
                       cqm mpn rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
                       avx512bw avx512vl xsaveropt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                       cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lll
                       arch_capabilities
```

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 211

SPECCrate®2017_int_peak = 219

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Platform Notes (Continued)

cache size : 22528 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
node 0 size: 192073 MB
node 0 free: 191576 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61
node 1 size: 193532 MB
node 1 free: 192653 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62
node 2 size: 193507 MB
node 2 free: 177616 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63
node 3 size: 193532 MB
node 3 free: 193266 MB
node distances:
node   0   1   2   3
  0: 10 21 11 21
  1: 21 10 21 11
  2: 11 21 10 21
  3: 21 11 21 10
```

From /proc/meminfo

```
MemTotal:      791188960 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.1 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.1"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge Mx740 (Intel Xeon Gold 6226R, 2.90 GHz)

SPECCrate®2017_int_base = 211

SPECCrate®2017_int_peak = 219

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 May 5 13:04

SPEC is set to: /dev/shm/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	378G	7.6G	370G	2%	/dev/shm

From /sys/devices/virtual/dmi/id

BIOS:	Dell Inc.	2.7.1	02/14/2020
Vendor:	Dell Inc.		
Product:	PowerEdge	MX740c	
Product Family:	PowerEdge		
Serial:	1234567		

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

21x 00AD00B300AD HMA84GR7CJR4N-WM	32 GB	2 rank	2933
1x 00AD063200AD HMA84GR7CJR4N-WM	32 GB	2 rank	2933
2x 00AD069D00AD HMA84GR7CJR4N-WM	32 GB	2 rank	2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 211

SPECCrate®2017_int_peak = 219

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Compiler Version Notes (Continued)

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)  
      | 525.x264_r(base, peak) 557.xz_r(base)
```

```
-----  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5  
NextGen Technology Build 20190729  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====  
C      | 500.perlbench_r(peak) 557.xz_r(peak)
```

```
-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====  
C      | 502.gcc_r(peak)
```

```
-----  
Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen  
Technology Build 20190729  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)  
      | 525.x264_r(base, peak) 557.xz_r(base)
```

```
-----  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5  
NextGen Technology Build 20190729  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====  
C      | 500.perlbench_r(peak) 557.xz_r(peak)
```

```
-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====  
C      | 502.gcc_r(peak)
```

```
-----  
Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen  
Technology Build 20190729
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 211

SPECCrate®2017_int_peak = 219

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(peak) 557.xz_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge Mx740 (Intel Xeon Gold 6226R, 2.90 GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_int_base = 211

SPECrate®2017_int_peak = 219

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -fllto  
-mfpmath=sse -funroll-loops -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compiler_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -fllto -mfpmath=sse  
-funroll-loops -qnextgen -fuse-ld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compiler_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-L/usr/local/IntelCompiler19/compiler_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin  
-lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 211

SPECrate®2017_int_peak = 219

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Nov-2019

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib
-ljemalloc

505.mcf_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge Mx740 (Intel Xeon Gold 6226R, 2.90 GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_int_base = 211

SPECrate®2017_int_peak = 219

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Peak Optimization Flags (Continued)

```
525.x264_r: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -fsto -O3  
-ffast-math -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: basepeak = yes
```

```
531.deepsjeng_r: -m64 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -fsto  
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-05 13:07:38-0400.

Report generated on 2020-06-09 16:06:03 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-09.