



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

**SPECrate®2017\_fp\_base = 345**

**SPECrate®2017\_fp\_peak = 363**

CPU2017 License: 001176


Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Aug-2019

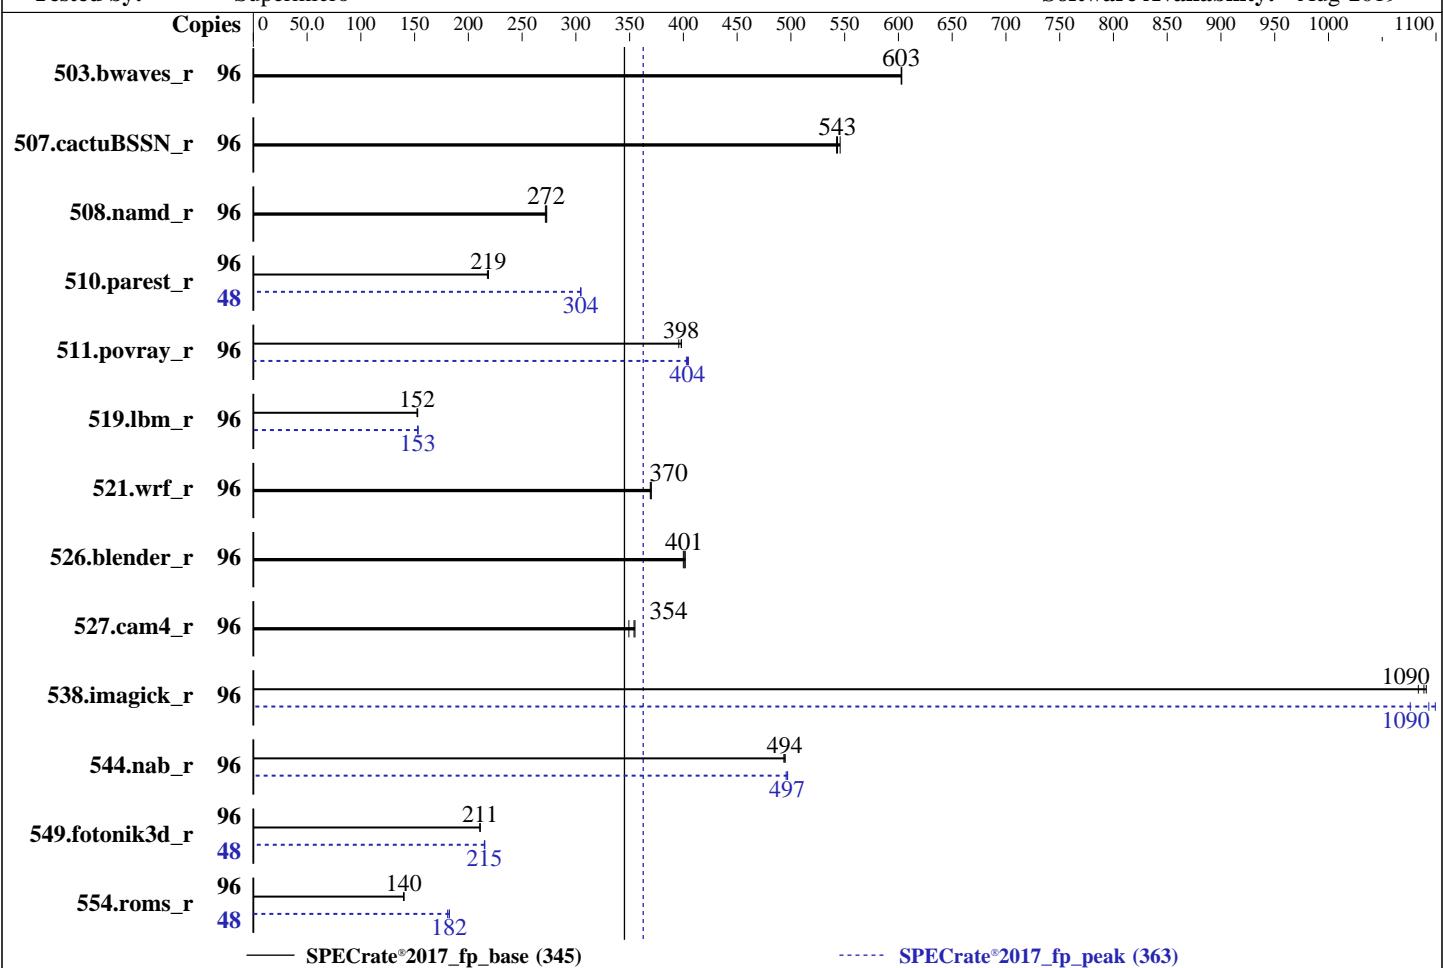

### Hardware

CPU Name: AMD EPYC 7402  
Max MHz: 3350  
Nominal: 2800  
Enabled: 48 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 128 MB I+D on chip per chip, 16 MB shared / 3 cores  
Other: None  
Memory: 2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R, running at 2933)  
Storage: 1 x 200 GB SATAT III SSD  
Other: None

### Software

OS: Ubuntu 19.04  
Compiler: kernel 5.0.0-25-generic  
Parallel: C/C++/Fortran: Version 2.0.0 of AOCC  
Firmware: No  
File System: Version 2.1 released Feb-2020  
System State: ext4  
Base Pointers: Run level 3 (multi-user)  
Peak Pointers: 64-bit  
Other: 64-bit  
Power Management: jemalloc: jemalloc memory allocator library v5.2.0  
BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

**SPECrate®2017\_fp\_base = 345**

**SPECrate®2017\_fp\_peak = 363**

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1596	603	1597	603	<b>1597</b>	<b>603</b>	96	1596	603	1597	603	<b>1597</b>	<b>603</b>
507.cactusBSSN_r	96	223	546	<b>224</b>	<b>543</b>	224	542	96	223	546	<b>224</b>	<b>543</b>	224	542
508.namd_r	96	336	272	334	273	<b>335</b>	<b>272</b>	96	336	272	334	273	<b>335</b>	<b>272</b>
510.parest_r	96	<b>1149</b>	<b>219</b>	1149	219	1153	218	48	<b>412</b>	<b>304</b>	412	305	413	304
511.povray_r	96	566	396	<b>563</b>	<b>398</b>	563	398	96	554	405	557	403	<b>555</b>	<b>404</b>
519.lbm_r	96	662	153	664	152	<b>664</b>	<b>152</b>	96	661	153	661	153	<b>661</b>	<b>153</b>
521.wrf_r	96	582	369	581	370	<b>581</b>	<b>370</b>	96	582	369	581	370	<b>581</b>	<b>370</b>
526.blender_r	96	364	402	366	400	<b>365</b>	<b>401</b>	96	364	402	366	400	<b>365</b>	<b>401</b>
527.cam4_r	96	<b>474</b>	<b>354</b>	473	355	481	349	96	<b>474</b>	<b>354</b>	473	355	481	349
538.imagick_r	96	220	1080	219	1090	<b>219</b>	<b>1090</b>	96	<b>218</b>	<b>1090</b>	222	1080	217	1100
544.nab_r	96	327	493	<b>327</b>	<b>494</b>	327	495	96	325	497	326	496	<b>325</b>	<b>497</b>
549.fotonik3d_r	96	1775	211	<b>1774</b>	<b>211</b>	1773	211	48	<b>870</b>	<b>215</b>	871	215	869	215
554.roms_r	96	<b>1090</b>	<b>140</b>	1088	140	1092	140	48	422	181	<b>419</b>	<b>182</b>	418	182

**SPECrate®2017\_fp\_base = 345**

**SPECrate®2017\_fp\_peak = 363**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_fp\_base = 345

SPECrate®2017\_fp\_peak = 363

Test Date: May-2020

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Operating System Notes (Continued)

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017/amd_rate_aocc200_rome_C_lib/64;/home/cpu2017/amd_rate_aoc
  c200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fno-jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS Settings:

Determinism Control = Manual

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

Package Power Limit Control = Manual

Package Power Limit = 200

APBDIS = 1

NUMA Nodes Per Socket = NPS4

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on h11dsu-01 Thu May 14 18:25:27 2020
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

SPECrate®2017\_fp\_base = 345

SPECrate®2017\_fp\_peak = 363

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Aug-2019

## Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7402 24-Core Processor
  2 "physical id"s (chips)
  96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 24
  siblings   : 48
  physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
  physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                96
On-line CPU(s) list:  0-95
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             2
NUMA node(s):          8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7402 24-Core Processor
Stepping:               0
CPU MHz:                1799.954
CPU max MHz:           2800.0000
CPU min MHz:           1500.0000
BogoMIPS:              5600.44
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:                512K
L3 cache:                16384K
NUMA node0 CPU(s):     0-5,48-53
NUMA node1 CPU(s):     6-11,54-59
NUMA node2 CPU(s):     12-17,60-65
NUMA node3 CPU(s):     18-23,66-71
NUMA node4 CPU(s):     24-29,72-77
NUMA node5 CPU(s):     30-35,78-83
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

SPECrate®2017\_fp\_base = 345

SPECrate®2017\_fp\_peak = 363

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Aug-2019

## Platform Notes (Continued)

```
NUMA node6 CPU(s):      36-41,84-89
NUMA node7 CPU(s):      42-47,90-95
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                       pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                       constant_tsc rep_good nopl xtTopology nonstop_tsc cpuid extd_apicid aperfmpfperf pn
                       pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
                       rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                       osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
                       cat_13 cdp_13 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bni1 avx2
                       smep bni2 cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
                       xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr
                       wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
                       decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
                       overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
node 0 size: 257908 MB
node 0 free: 257505 MB
node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
node 1 size: 258044 MB
node 1 free: 257698 MB
node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
node 2 size: 258044 MB
node 2 free: 257605 MB
node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
node 3 size: 258032 MB
node 3 free: 257659 MB
node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
node 4 size: 258044 MB
node 4 free: 257712 MB
node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
node 5 size: 258044 MB
node 5 free: 257708 MB
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
node 6 size: 258020 MB
node 6 free: 257685 MB
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
node 7 size: 258043 MB
node 7 free: 257709 MB
node distances:
node    0    1    2    3    4    5    6    7
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Supermicro**

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

**SPECrate®2017\_fp\_base = 345**

**SPECrate®2017\_fp\_peak = 363**

**CPU2017 License:** 001176

**Test Date:** May-2020

**Test Sponsor:** Supermicro

**Hardware Availability:** Aug-2019

**Tested by:** Supermicro

**Software Availability:** Aug-2019

## Platform Notes (Continued)

0:	10	12	12	12	32	32	32	32
1:	12	10	12	12	32	32	32	32
2:	12	12	10	12	32	32	32	32
3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

From /proc/meminfo

```
MemTotal:      2113722356 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/usr/bin/lsb\_release -d  
Ubuntu 19.04

From /etc/\*release\* /etc/\*version\*

```
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="19.04 (Disco Dingo)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 19.04"
  VERSION_ID="19.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

uname -a:

```
Linux h11dsu-01 5.0.0-25-generic #26-Ubuntu SMP Thu Aug 1 12:04:58 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 May 14 11:13

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

SPECrate®2017\_fp\_base = 345

SPECrate®2017\_fp\_peak = 363

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Aug-2019

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  183G   33G  141G  20%  /
```

From /sys/devices/virtual/dmi/id

```
BIOS:          American Megatrends Inc. 2.1 02/21/2020
Vendor:        Supermicro
Product:       Super Server
Serial:        0123456789
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
32x SK Hynix HMAA8GR7AJR4N-WM 64 kB 2 rank 2933
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
              | 544.nab_r(base, peak)
-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

=====
C++          | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

=====
C++, C       | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

SPECrate®2017\_fp\_base = 345

SPECrate®2017\_fp\_peak = 363

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_fp\_base = 345

SPECrate®2017\_fp\_peak = 363

Test Date: May-2020

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64

527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

538.imagick\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_fp\_base = 345

SPECrate®2017\_fp\_peak = 363

Test Date: May-2020

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Base Portability Flags (Continued)

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremp-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremp-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_fp\_base = 345

SPECrate®2017\_fp\_peak = 363

Test Date: May-2020

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

SPECrate®2017\_fp\_base = 345

SPECrate®2017\_fp\_peak = 363

CPU2017 License: 001176

Test Date: May-2020

Test Sponsor: Supermicro

Hardware Availability: Aug-2019

Tested by: Supermicro

Software Availability: Aug-2019

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -std=c++98 -fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -Ofast -march=znver2
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_fp\_base = 345

SPECrate®2017\_fp\_peak = 363

Test Date: May-2020

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

```
554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Supermicro**

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7402)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_fp\_base = 345

SPECrate®2017\_fp\_peak = 363

Test Date: May-2020

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactusBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aoxx200-flags-C4.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aoxx200-flags-C4.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-14 14:25:26-0400.

Report generated on 2020-06-23 18:10:05 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-23.