



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5320H,  
2.40GHz

SPECrate®2017\_int\_base = 501

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2020

Hardware Availability: Nov-2020

Software Availability: Jul-2020

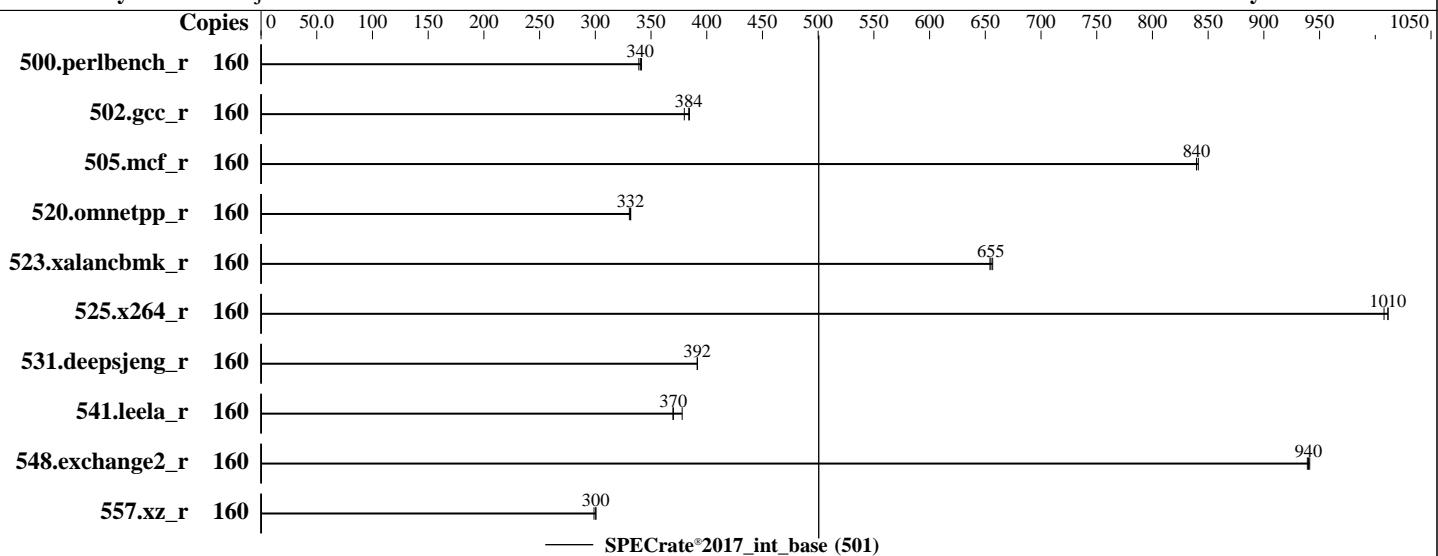

## Hardware

CPU Name: Intel Xeon Gold 5320H  
Max MHz: 4200  
Nominal: 2400  
Enabled: 80 cores, 4 chips, 2 threads/core  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 27.5 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R, running at 2666)  
Storage: 1 x SATA M.2 SSD, 480GB  
Other: None

## Software

OS: SUSE Linux Enterprise Server 15 SP2 5.3.18-22-default  
Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Fujitsu BIOS Version V1.0.0 R1.8.0 for D3892-A1x. Released Jan-2021 tested as V1.0.0 R1.1.1 for D3892-A1x Sep-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: binutils-gold 2.32-7.11.4  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX4770 M6, Intel Xeon Gold 5320H,  
2.40GHz

SPECrate®2017\_int\_base = 501

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2020

Hardware Availability: Nov-2020

Software Availability: Jul-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	<b>748</b>	<b>340</b>	751	339	746	341							
502.gcc_r	160	<b>590</b>	<b>384</b>	589	384	596	380							
505.mcf_r	160	307	841	<b>308</b>	<b>840</b>	308	840							
520.omnetpp_r	160	633	332	<b>633</b>	<b>332</b>	635	331							
523.xalancbmk_r	160	257	657	<b>258</b>	<b>655</b>	258	654							
525.x264_r	160	278	1010	<b>277</b>	<b>1010</b>	277	1010							
531.deepsjeng_r	160	468	392	<b>468</b>	<b>392</b>	468	392							
541.leela_r	160	<b>716</b>	<b>370</b>	701	378	717	370							
548.exchange2_r	160	445	941	446	939	<b>446</b>	<b>940</b>							
557.xz_r	160	578	299	575	301	<b>575</b>	<b>300</b>							

SPECrate®2017\_int\_base = 501

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.  
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-159
echo 15000000 > /proc/sys/kernel/sched_min_granularity_ns
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/Benchmark/speccpu-ic19_lu1/lib/intel64:/home/Benchmark/speccpu-ic
    19_lu1/lib/ia32:/home/Benchmark/speccpu-ic19_lu1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5320H,  
2.40GHz

SPECrate®2017\_int\_base = 501

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2020

Hardware Availability: Nov-2020

Software Availability: Jul-2020

## General Notes

Binaries compiled on a system with 4x Intel Xeon Platinum 8360H CPU + 1536GB RAM memory using SUSE Linux Enterprise Server 15 SP2

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

binutils-gold, an ELF linker

package available from <https://software.opensuse.org/package/binutils-gold> as follows:

- Click "Show bunutils-gold for other distributions"

- Click "Show community packages" of SUSE SLE-15-SP2

- Click "Expert Download" selecting package corresponding to 2.32 release identified by "home:gabrielftg:ulp-preview"

- Click "Grab binary packages directly"

- Click "binutils-gold-xxxx.rpm"

package was installed with rpm command i.e.:

rpm -i --nodeps bunutils-gold-xxxx.rpm

## Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled

Intel Virtualization Technology = Disabled

Utilization Profile = Unbalanced

Stale AtoS = Disabled

LLC Deadline Alloc = Disabled

XPT Prefetch = Enabled

Patrol Scrub = Enabled

SNC = Enabled

FAN Control = Full

Sysinfo program /home/Benchmark/speccpu-ic19\_1u1/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost Thu Dec 24 02:31:11 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5320H,  
2.40GHz

SPECrate®2017\_int\_base = 501

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2020

Test Sponsor: Fujitsu

Hardware Availability: Nov-2020

Tested by: Fujitsu

Software Availability: Jul-2020

## Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) Gold 5320H CPU @ 2.40GHz
  4 "physical id"s (chips)
  160 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 20
siblings : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         46 bits physical, 48 bits virtual
CPU(s):                160
On-line CPU(s) list:  0-159
Thread(s) per core:   2
Core(s) per socket:   20
Socket(s):             4
NUMA node(s):          8
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 5320H CPU @ 2.40GHz
Stepping:               11
CPU MHz:               1000.022
CPU max MHz:           4200.0000
CPU min MHz:           1000.0000
BogoMIPS:              4800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              28160K
NUMA node0 CPU(s):    0-2,5,6,10-12,15,16,80-82,85,86,90-92,95,96
NUMA node1 CPU(s):    3,4,7-9,13,14,17-19,83,84,87-89,93,94,97-99
NUMA node2 CPU(s):    20-22,25,26,30-32,35,36,100-102,105,106,110-112,115,116
NUMA node3 CPU(s):    23,24,27-29,33,34,37-39,103,104,107-109,113,114,117-119
NUMA node4 CPU(s):    40-42,45,46,50-52,55,56,120-122,125,126,130-132,135,136
NUMA node5 CPU(s):    43,44,47-49,53,54,57-59,123,124,127-129,133,134,137-139
NUMA node6 CPU(s):    60-62,65,66,70-72,75,76,140-142,145,146,150-152,155,156
NUMA node7 CPU(s):    63,64,67-69,73,74,77-79,143,144,147-149,153,154,157-159
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5320H,  
2.40GHz

SPECrate®2017\_int\_base = 501

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2020

Test Sponsor: Fujitsu

Hardware Availability: Nov-2020

Tested by: Fujitsu

Software Availability: Jul-2020

## Platform Notes (Continued)

```
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms
invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 dtherm ida arat pln pts hwp hwp_act_window
hwp_epp hwp_pkg_req pku ospke avx512_vnni md_clear flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 80 81 82 85 86 90 91 92 95 96
node 0 size: 192128 MB
node 0 free: 191861 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 83 84 87 88 89 93 94 97 98 99
node 1 size: 193531 MB
node 1 free: 193194 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 100 101 102 105 106 110 111 112 115 116
node 2 size: 193531 MB
node 2 free: 193355 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 103 104 107 108 109 113 114 117 118 119
node 3 size: 193531 MB
node 3 free: 193281 MB
node 4 cpus: 40 41 42 45 46 50 51 52 55 56 120 121 122 125 126 130 131 132 135 136
node 4 size: 193531 MB
node 4 free: 193309 MB
node 5 cpus: 43 44 47 48 49 53 54 57 58 59 123 124 127 128 129 133 134 137 138 139
node 5 size: 193497 MB
node 5 free: 193316 MB
node 6 cpus: 60 61 62 65 66 70 71 72 75 76 140 141 142 145 146 150 151 152 155 156
node 6 size: 193531 MB
node 6 free: 193332 MB
node 7 cpus: 63 64 67 68 69 73 74 77 78 79 143 144 147 148 149 153 154 157 158 159
node 7 size: 193304 MB
node 7 free: 193118 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  20  20  20  20  20  20
  1: 11  10  20  20  20  20  20  20
  2: 20  20  10  11  20  20  20  20
  3: 20  20  11  10  20  20  20  20
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5320H,  
2.40GHz

SPECrate®2017\_int\_base = 501

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2020

Test Sponsor: Fujitsu

Hardware Availability: Nov-2020

Tested by: Fujitsu

Software Availability: Jul-2020

## Platform Notes (Continued)

```
4: 20 20 20 20 10 11 20 20  
5: 20 20 20 20 11 10 20 20  
6: 20 20 20 20 20 20 10 11  
7: 20 20 20 20 20 20 11 10
```

```
From /proc/meminfo  
MemTotal: 1583704140 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*  
os-release:  
  NAME="SLES"  
  VERSION="15-SP2"  
  VERSION_ID="15.2"  
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"  
  ID="sles"  
  ID_LIKE="suse"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

```
uname -a:  
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aebe) x86_64  
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

itlb_multihit:	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds:	Not affected
tsx_async_abort:	Not affected

run-level 3 Dec 24 02:27

```
SPEC is set to: /home/Benchmark/speccpu-ic19_lu1  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sdb3        xfs   376G   94G  282G  25% /home
```

From /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5320H,  
2.40GHz

SPECrate®2017\_int\_base = 501

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2020

Test Sponsor: Fujitsu

Hardware Availability: Nov-2020

Tested by: Fujitsu

Software Availability: Jul-2020

## Platform Notes (Continued)

BIOS: FUJITSU V1.0.0.0 R1.1.1 for D3892-A1x

09/25/2020

Vendor: FUJITSU

Product: PRIMERGY RX4770 M6

Product Family: SERVER

Serial: MABTxxxxxx

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base)  
| 525.x264\_r(base) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2\_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5320H,  
2.40GHz

SPECrate®2017\_int\_base = 501

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2020

Hardware Availability: Nov-2020

Software Availability: Jul-2020

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-fuse-lld=gold -qopt-mem-layout-trans=4  
-L/opt/intel/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse  
-funroll-loops -fuse-lld=gold -qopt-mem-layout-trans=4  
-L/opt/intel/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Gold 5320H,  
2.40GHz

SPECrate®2017\_int\_base = 501

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2020

Hardware Availability: Nov-2020

Software Availability: Jul-2020

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries  
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CPL-RevA.html>

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CPL-RevA.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-12-23 12:31:11-0500.

Report generated on 2021-01-05 14:45:23 by CPU2017 PDF formatter v6255.

Originally published on 2021-01-05.