



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate®2017\_int\_base = 568

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2021

Hardware Availability: Jan-2020

Software Availability: Aug-2020

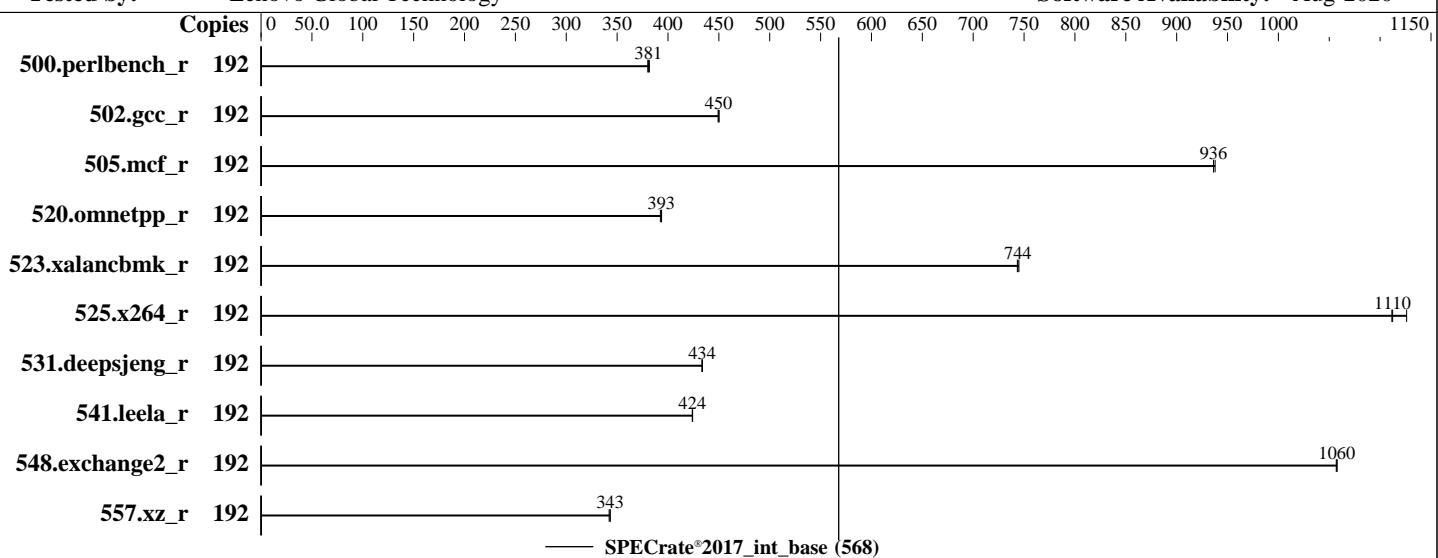

### Hardware

CPU Name: Intel Xeon Gold 6252  
Max MHz: 3700  
Nominal: 2100  
Enabled: 96 cores, 4 chips, 2 threads/core  
Orderable: 4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 35.75 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### OS:

Red Hat Enterprise Linux 8.0  
(Ootpa)

### Compiler:

Kernel 4.18.0-80.el8.x86\_64  
C/C++: Version 19.1.2.275 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 19.1.2.275 of Intel Fortran  
Compiler for Linux

### Parallel:

No

### Firmware:

Lenovo BIOS Version TEE156L 2.61 released May-2020

### File System:

xfs

### System State:

Run level 3 (multi-user)

### Base Pointers:

64-bit

### Peak Pointers:

Not Applicable

### Other:

None

### Power Management:

BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate®2017\_int\_base = 568

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	<b>803</b>	<b>381</b>	804	380	801	382							
502.gcc_r	192	<b>604</b>	<b>450</b>	604	450	605	449							
505.mcf_r	192	331	936	<b>331</b>	<b>936</b>	331	938							
520.omnetpp_r	192	642	393	<b>640</b>	<b>393</b>	640	394							
523.xalancbmk_r	192	272	745	273	743	<b>273</b>	<b>744</b>							
525.x264_r	192	<b>302</b>	<b>1110</b>	299	1130	302	1110							
531.deepsjeng_r	192	<b>507</b>	<b>434</b>	507	434	508	434							
541.leela_r	192	750	424	750	424	<b>750</b>	<b>424</b>							
548.exchange2_r	192	476	1060	476	1060	<b>476</b>	<b>1060</b>							
557.xz_r	192	604	343	<b>604</b>	<b>343</b>	606	342							

SPECrate®2017\_int\_base = 568

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.0-ic19.1u2/lib/intel64:/home/cpu2017-1.1.0-ic19.1u2/l
     ib/ia32:/home/cpu2017-1.1.0-ic19.1u2/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate®2017\_int\_base = 568

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

### General Notes (Continued)

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
MONITOR/MWAIT set to Enable

CPU P-state Control set to Legacy

Adjacent Cache Prefetch set to Disable

DCU Streamer Prefetcher set to Disable

SNC set to Enable

Sysinfo program /home/cpu2017-1.1.0-ic19.lu2/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on localhost.localdomain Fri Jan 15 22:58:47 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6252 CPU @ 2.10GHz

4 "physical id"s (chips)

192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 192

On-line CPU(s) list: 0-191

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate®2017\_int\_base = 568

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Platform Notes (Continued)

Thread(s) per core: 2  
Core(s) per socket: 24  
Socket(s): 4  
NUMA node(s): 8  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6252 CPU @ 2.10GHz  
Stepping: 7  
CPU MHz: 3190.920  
CPU max MHz: 3700.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 36608K  
NUMA node0 CPU(s): 0-3,7,8,12-14,18-20,96-99,103,104,108-110,114-116  
NUMA node1 CPU(s): 4-6,9-11,15-17,21-23,100-102,105-107,111-113,117-119  
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,120-122,126-128,132-134,138-140  
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,123-125,129-131,135-137,141-143  
NUMA node4 CPU(s): 48-51,55-57,61-63,67,68,144-147,151-153,157-159,163,164  
NUMA node5 CPU(s): 52-54,58-60,64-66,69-71,148-150,154-156,160-162,165-167  
NUMA node6 CPU(s): 72-75,79-81,85-87,91,92,168-171,175-177,181-183,187,188  
NUMA node7 CPU(s): 76-78,82-84,88-90,93-95,172-174,178-180,184-186,189-191  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov  
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid  
aperfmperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16  
xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave  
avx f16c rdrandlahf\_lm abm 3dnnowprefetch cpuid\_fault epb cat\_13 cdp\_13  
invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi  
flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm  
cqm mpq rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd  
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total  
cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni flush\_l1d  
arch\_capabilities

/proc/cpuinfo cache data  
cache size : 36608 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 3 7 8 12 13 14 18 19 20 96 97 98 99 103 104 108 109 110 114 115 116  
node 0 size: 193147 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate®2017\_int\_base = 568

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

### Platform Notes (Continued)

```
node 0 free: 192873 MB
node 1 cpus: 4 5 6 9 10 11 15 16 17 21 22 23 100 101 102 105 106 107 111 112 113 117
118 119
node 1 size: 193506 MB
node 1 free: 193279 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 120 121 122 126 127 128 132 133 134
138 139 140
node 2 size: 193531 MB
node 2 free: 192430 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 123 124 125 129 130 131 135 136 137
141 142 143
node 3 size: 193531 MB
node 3 free: 193260 MB
node 4 cpus: 48 49 50 51 55 56 57 61 62 63 67 68 144 145 146 147 151 152 153 157 158
159 163 164
node 4 size: 193531 MB
node 4 free: 193318 MB
node 5 cpus: 52 53 54 58 59 60 64 65 66 69 70 71 148 149 150 154 155 156 160 161 162
165 166 167
node 5 size: 193531 MB
node 5 free: 193250 MB
node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 168 169 170 171 175 176 177 181 182
183 187 188
node 6 size: 193531 MB
node 6 free: 193273 MB
node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 172 173 174 178 179 180 184 185 186
189 190 191
node 7 size: 193528 MB
node 7 free: 193260 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  21  21  21  21  21  21
  1: 11  10  21  21  21  21  21  21
  2: 21  21  10  11  21  21  21  21
  3: 21  21  11  10  21  21  21  21
  4: 21  21  21  21  10  11  21  21
  5: 21  21  21  21  11  10  21  21
  6: 21  21  21  21  21  21  10  11
  7: 21  21  21  21  21  21  11  10
```

From /proc/meminfo

```
MemTotal:      1584986404 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

os-release:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate®2017\_int\_base = 568

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Platform Notes (Continued)

```
NAME="Red Hat Enterprise Linux"
VERSION="8.0 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.0"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga

uname -a:
Linux localhost.localdomain 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Jan 15 22:56

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.lu2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   839G   65G  774G   8% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS:    Lenovo -[TEE156L-2.61]- 05/20/2020
Vendor:  Lenovo
Product: ThinkSystem SR850P -[7D2HCT01WW]-
Product Family: ThinkSystem
Serial:  1234567890
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate®2017\_int\_base = 568

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Platform Notes (Continued)

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)  
| 525.x264_r(base) 557.xz_r(base)
```

```
-----  
Intel(R) C Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

```
=====  
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
| 541.leela_r(base)
```

```
-----  
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

```
=====  
Fortran | 548.exchange2_r(base)
```

```
-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.2.275 Build 20200623  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

### Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate®2017\_int\_base = 568

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2021

Hardware Availability: Jan-2020

Software Availability: Aug-2020

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate®2017\_int\_base = 568

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2021-01-15 09:58:46-0500.

Report generated on 2021-02-08 12:43:58 by CPU2017 PDF formatter v6255.

Originally published on 2021-02-08.