



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M1, AMD EPYC 7F52,
3.50 GHz

SPECrate®2017_int_base = 294

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2020

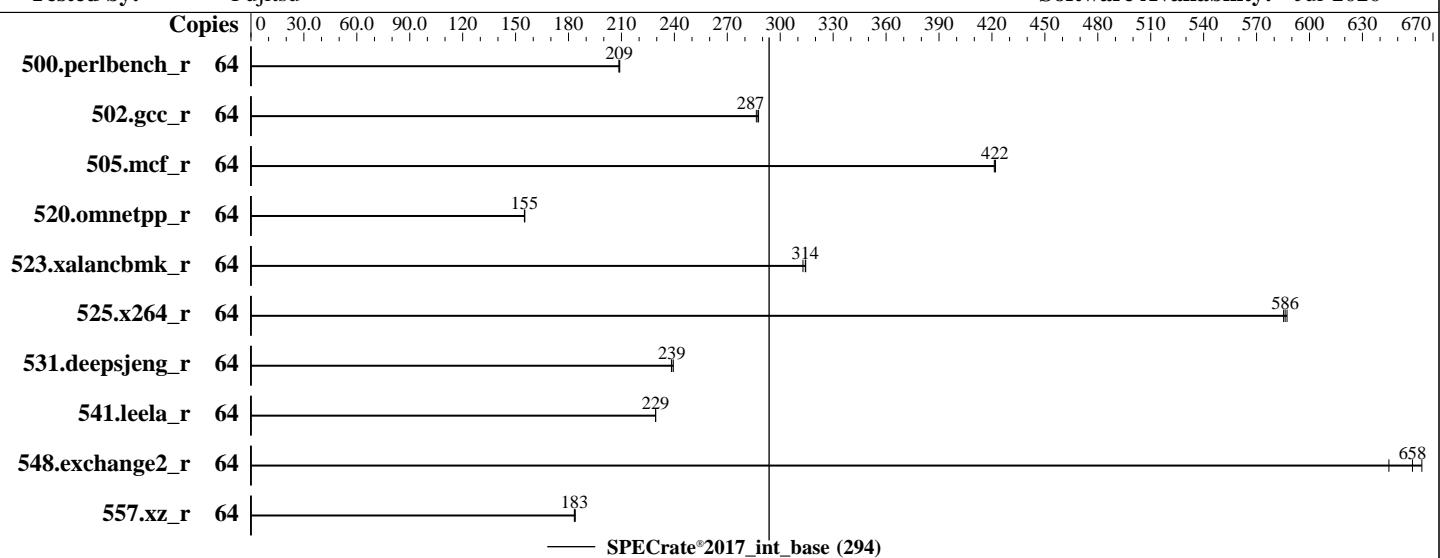

Hardware

CPU Name: AMD EPYC 7F52
 Max MHz: 3900
 Nominal: 3500
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 16 MB per core
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC4-3200V-L)
 Storage: 1 x PCIe SSD, 2TB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86_64)
 Compiler: kernel version
 5.3.18-22-default
 Parallel: C/C++/Fortran: Version 2.0.0 of AOCC
 No
 Firmware: Fujitsu BIOS Version 1.2.V1 Released Apr-2021
 tested as Dec-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M1, AMD EPYC 7F52,
3.50 GHz

SPECrate®2017_int_base = 294

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	487	209	488	209	488	209							
502.gcc_r	64	315	287	315	288	316	286							
505.mcf_r	64	245	422	245	422	245	421							
520.omnetpp_r	64	541	155	542	155	541	155							
523.xalancbmk_r	64	216	313	215	314	215	314							
525.x264_r	64	191	586	191	587	191	585							
531.deepsjeng_r	64	308	238	306	239	307	239							
541.leela_r	64	462	229	462	229	462	229							
548.exchange2_r	64	253	664	255	658	260	645							
557.xz_r	64	377	183	376	184	377	183							

SPECrate®2017_int_base = 294

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
 Set swappiness=1 to swap only if necessary
 Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M1, AMD EPYC 7F52,
3.50 GHz

SPECrate®2017_int_base = 294

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2020

Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/Benchmark/speccpu/amd_rate_aocc200_rome_C_lib/64;/home/Benchmark/
speccpu/amd_rate_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fno-jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS configuration:

cTDP = 240

Determinism Slider = Power

Package Power Limit = 240

SVM Mode = Disabled

NUMA Nodes Per Socket = NPS4

L1 Stream HW Prefetcher = Enabled

L2 Stream HW Prefetcher = Enabled

DRAM Scrub Time = Disabled

Sysinfo program /home/Benchmark/speccpu/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on localhost Wed Dec 23 09:44:43 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M1, AMD EPYC 7F52,
3.50 GHz

SPECrate®2017_int_base = 294

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2020

Platform Notes (Continued)

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7F52 16-Core Processor
  2 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 16
  siblings : 32
  physical 0: cores 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
  physical 1: cores 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          43 bits physical, 48 bits virtual
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
NUMA node(s):           8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7F52 16-Core Processor
Stepping:                0
CPU MHz:                1798.664
CPU max MHz:            3500.0000
CPU min MHz:            2500.0000
BogoMIPS:                7000.49
Virtualization:         AMD-V
L1d cache:               32K
L1i cache:               32K
L2 cache:                512K
L3 cache:                16384K
NUMA node0 CPU(s):      0-3,32-35
NUMA node1 CPU(s):      4-7,36-39
NUMA node2 CPU(s):      8-11,40-43
NUMA node3 CPU(s):      12-15,44-47
NUMA node4 CPU(s):      16-19,48-51
NUMA node5 CPU(s):      20-23,52-55
NUMA node6 CPU(s):      24-27,56-59
NUMA node7 CPU(s):      28-31,60-63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M1, AMD EPYC 7F52,
3.50 GHz

SPECrate®2017_int_base = 294

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2020

Platform Notes (Continued)

```
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13
cdp_13 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep
bmi2 cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd
arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 257777 MB
node 0 free: 257516 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 258043 MB
node 1 free: 257812 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 258043 MB
node 2 free: 257807 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 257997 MB
node 3 free: 257765 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 258043 MB
node 4 free: 257817 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 258043 MB
node 5 free: 257745 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 258043 MB
node 6 free: 257711 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 257803 MB
node 7 free: 257568 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M1, AMD EPYC 7F52,
3.50 GHz

SPECrate®2017_int_base = 294

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2020

Platform Notes (Continued)

3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

From /proc/meminfo

```
MemTotal:      2113328652 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

```
os-release:
  NAME="SLES"
  VERSION="15-SP2"
  VERSION_ID="15.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

uname -a:

```
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020
(720aebea/lp-1a956f1) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M1, AMD EPYC 7F52,
3.50 GHz

SPECrate®2017_int_base = 294

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2020

Platform Notes (Continued)

run-level 3 Dec 23 02:56

SPEC is set to: /home/Benchmark/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	xfs	1.3T	16G	1.3T	2%	/home

From /sys/devices/virtual/dmi/id

Vendor:	FUJITSU
Product:	S26361-K2634-V100
Serial:	MACUxxxxxx

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	1.2.V1
BIOS Date:	12/22/2020
BIOS Revision:	5.14

(End of data from sysinfo program)

Compiler Version Notes

=====

C	500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
	525.x264_r(base) 557.xz_r(base)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

=====

C++	520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
	541.leela_r(base)

=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M1, AMD EPYC 7F52,
3.50 GHz

SPECrate®2017_int_base = 294

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2020

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran | 548.exchange2_r(base)

AOCC_LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC_LLVM.2.0.0.B191.2019_07_19)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

(Test Sponsor: Fujitsu)

PRIMERGY RX2450 M1, AMD EPYC 7F52,
3.50 GHz

SPECrate®2017_int_base = 294

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2020

Base Optimization Flags

C benchmarks:

```
-floop -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc  
-lflang
```

C++ benchmarks:

```
-floop -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-floop -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C4.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ROME-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C4.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ROME-RevD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2020-12-22 19:44:43-0500.

Report generated on 2021-03-16 15:31:51 by CPU2017 PDF formatter v6255.

Originally published on 2021-03-16.