



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

**SPECrate®2017\_int\_base = 122**

**SPECrate®2017\_int\_peak = 125**

CPU2017 License: 006042


Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

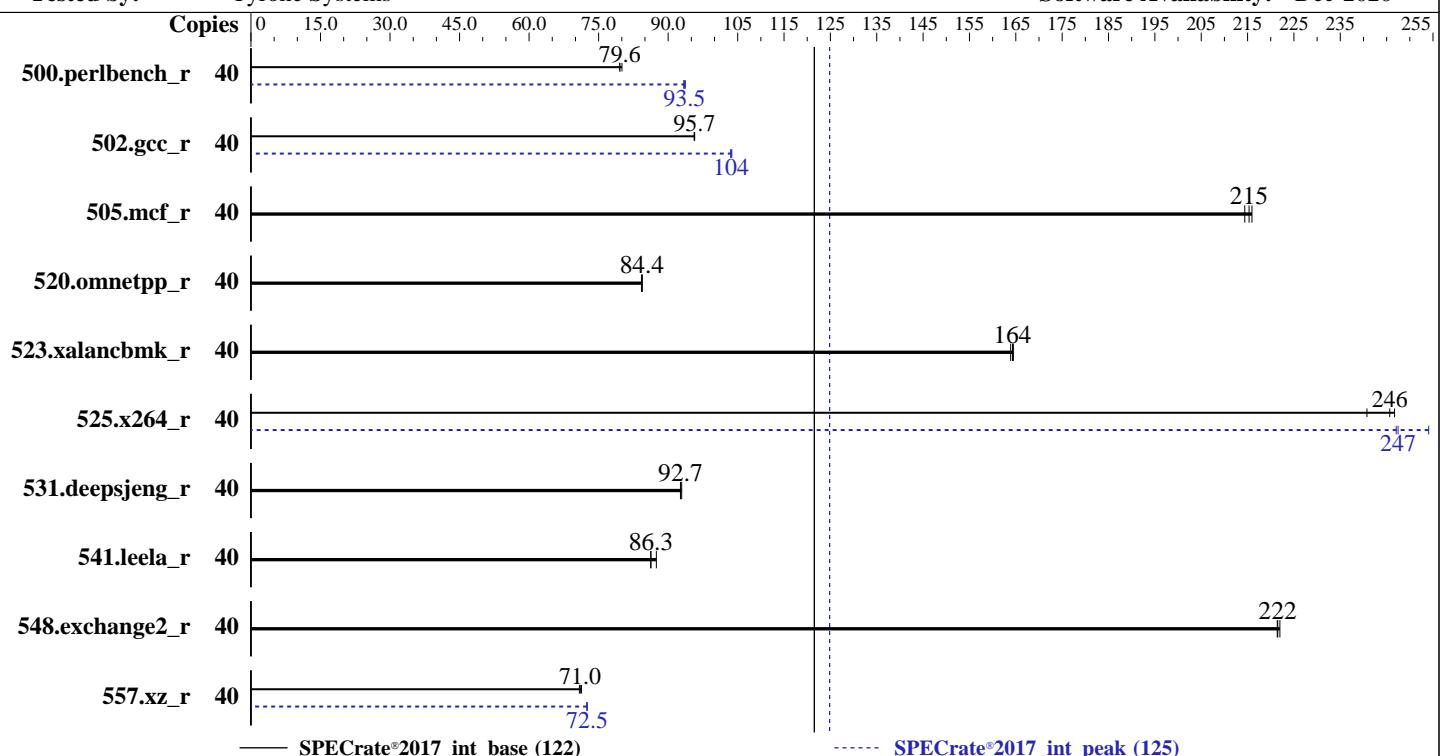

## Hardware

CPU Name: Intel Xeon Silver 4210  
Max MHz: 3200  
Nominal: 2200  
Enabled: 20 cores, 2 chips, 2 threads/core  
Orderable: 1,2 (chip)s  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 13.75 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R,  
running at 2400)  
Storage: 1 x 480 GB SATA SSD  
Other: None

## OS:

CentOS Linux release 8.3.2011  
Kernel 4.18.0-240.el8.x86\_64

## Compiler:

4.18.0-240.el8.x86\_64  
C/C++: Version 19.1.2.254 of Intel C/C++  
Compiler Build 20200623 for Linux;

Fortran: Version 19.1.2.254 of Intel Fortran

Compiler Build 20200623 for Linux

## Parallel:

No

## Firmware:

Version 3.4 released Nov-2020

## File System:

xfs

## System State:

Run level 3 (multi-user)

## Base Pointers:

64-bit

## Peak Pointers:

32/64-bit

## Other:

jemalloc memory allocator V5.0.1

## Power Management:

BIOS set to prefer performance at the cost of  
additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

**SPECrate®2017\_int\_base = 122**

**SPECrate®2017\_int\_peak = 125**

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

## Results Table

| Benchmark       | Base   |            |             |            |             |            |             | Peak   |            |             |            |             |            |             |
|-----------------|--------|------------|-------------|------------|-------------|------------|-------------|--------|------------|-------------|------------|-------------|------------|-------------|
|                 | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       |
| 500.perlbench_r | 40     | 801        | 79.5        | <b>800</b> | <b>79.6</b> | 796        | 80.0        | 40     | 682        | 93.3        | 680        | 93.7        | <b>681</b> | <b>93.5</b> |
| 502.gcc_r       | 40     | 592        | 95.6        | <b>592</b> | <b>95.7</b> | 592        | 95.7        | 40     | 547        | 103         | 546        | 104         | <b>547</b> | <b>104</b>  |
| 505.mcf_r       | 40     | 299        | 216         | <b>300</b> | <b>215</b>  | 301        | 214         | 40     | 299        | 216         | <b>300</b> | <b>215</b>  | 301        | 214         |
| 520.omnetpp_r   | 40     | 623        | 84.2        | 622        | 84.4        | <b>622</b> | <b>84.4</b> | 40     | 623        | 84.2        | 622        | 84.4        | <b>622</b> | <b>84.4</b> |
| 523.xalancbmk_r | 40     | 258        | 164         | <b>257</b> | <b>164</b>  | 257        | 164         | 40     | 258        | 164         | <b>257</b> | <b>164</b>  | 257        | 164         |
| 525.x264_r      | 40     | 291        | 241         | 284        | 247         | <b>285</b> | <b>246</b>  | 40     | <b>283</b> | <b>247</b>  | 283        | 247         | 276        | 254         |
| 531.deepsjeng_r | 40     | <b>495</b> | <b>92.7</b> | 495        | 92.7        | 493        | 92.9        | 40     | <b>495</b> | <b>92.7</b> | 495        | 92.7        | 493        | 92.9        |
| 541.leela_r     | 40     | 757        | 87.5        | 768        | 86.2        | <b>768</b> | <b>86.3</b> | 40     | 757        | 87.5        | 768        | 86.2        | <b>768</b> | <b>86.3</b> |
| 548.exchange2_r | 40     | <b>473</b> | <b>222</b>  | 473        | 221         | 472        | 222         | 40     | <b>473</b> | <b>222</b>  | 473        | 221         | 472        | 222         |
| 557.xz_r        | 40     | 610        | 70.9        | <b>608</b> | <b>71.0</b> | 606        | 71.3        | 40     | 596        | 72.5        | <b>596</b> | <b>72.5</b> | 596        | 72.5        |

**SPECrate®2017\_int\_base = 122**

**SPECrate®2017\_int\_peak = 125**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.

The correct version of C/C++ compiler is: Version 19.1.2.254 Build 20200623 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.2.254 Build 20200623 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor.  
For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-
  32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

SPECrate®2017\_int\_base = 122

SPECrate®2017\_int\_peak = 125

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

## General Notes

Binaries compiled on a system with 2x Intel Cascade Lake CPU 4214R + 384 GB RAM memory using Centos 8.2 x86\_64

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5 , and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance

SNC = Enable

Stale AtoS = Disable

IMC Interleaving = 1-way Interleave

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on localhost.localdomain Thu Feb 25 09:12:16 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4210 CPU @ 2.20GHz

2 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

physical 0: cores 0 1 2 3 4 8 9 10 11 12

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

SPECrate®2017\_int\_base = 122

SPECrate®2017\_int\_peak = 125

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

## Platform Notes (Continued)

```
physical 1: cores 0 1 2 3 4 8 9 10 11 12
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                40
On-line CPU(s) list:   0-39
Thread(s) per core:    2
Core(s) per socket:    10
Socket(s):              2
NUMA node(s):           2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) Silver 4210 CPU @ 2.20GHz
Stepping:               7
CPU MHz:                2732.852
CPU max MHz:            3200.0000
CPU min MHz:            1000.0000
BogoMIPS:               4400.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                14080K
NUMA node0 CPU(s):      0-9,20-29
NUMA node1 CPU(s):      10-19,30-39
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid ept_ad fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
invpcid cqmq mpq rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt
avx512cd avx512bw avx512vl xsavopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc
cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear
flush_l1d arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 14080 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

SPECrate®2017\_int\_base = 122

SPECrate®2017\_int\_peak = 125

CPU2017 License: 006042

Test Date: Feb-2021

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Aug-2020

Tested by: Tyrone Systems

Software Availability: Dec-2020

## Platform Notes (Continued)

```
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
node 0 size: 185188 MB
node 0 free: 183462 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
node 1 size: 186668 MB
node 1 free: 192841 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10

From /proc/meminfo
MemTotal:           394870792 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
  performance

From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 8.3.2011
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.3
os-release:
  NAME="CentOS Linux"
  VERSION="8"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.3.2011
system-release: CentOS Linux release 8.3.2011
system-release-cpe: cpe:/o:centos:centos:8

uname -a:
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Fri Sep 25 19:48:47 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):
CVE-2018-3620 (L1 Terminal Fault):
Microarchitectural Data Sampling:                                     KVM: Mitigation: Split huge pages
                                                               Not affected
                                                               Not affected
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

**SPECrate®2017\_int\_base = 122**

**SPECrate®2017\_int\_peak = 125**

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Dec-2020

## Platform Notes (Continued)

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Mitigation: TSX disabled

run-level 3 Feb 25 02:33

SPEC is set to: /home/cpu2017

| Filesystem          | Type | Size | Used | Avail | Use% | Mounted on |
|---------------------|------|------|------|-------|------|------------|
| /dev/mapper/cl-home | xfs  | 372G | 5.8G | 366G  | 2%   | /home      |

From /sys/devices/virtual/dmi/id

|                 |                |
|-----------------|----------------|
| Vendor:         | Tyrone Systems |
| Product:        | X11DPi-N(T)    |
| Product Family: | SMC X11        |
| Serial:         | 123456789      |

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

### Memory:

|  |
|--|
| 4x NO DIMM NO DIMM   |
| 12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2400 |

### BIOS:

|                |                          |
|----------------|--------------------------|
| BIOS Vendor:   | American Megatrends Inc. |
| BIOS Version:  | 3.4                      |
| BIOS Date:     | 11/23/2020               |
| BIOS Revision: | 5.14                     |

(End of data from sysinfo program)

## Compiler Version Notes

---



---



---

C | 502.gcc\_r(peak)

---



---



---

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

SPECCrate®2017\_int\_base = 122

SPECCrate®2017\_int\_peak = 125

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

icc (NextGen): command line warning #10006: ignoring unknown option  
  '-i\_version=19.1.2.254' [-Woption-ignored]

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
  | 525.x264\_r(base, peak) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
  NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
icc (NextGen): command line warning #10006: ignoring unknown option  
  '-i\_version=19.1.2.254' [-Woption-ignored]

=====

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
  Version 19.1.2.254 Build 20200623

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
  Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
icc (NextGen): command line warning #10006: ignoring unknown option  
  '-i\_version=19.1.2.254' [-Woption-ignored]

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
  | 525.x264\_r(base, peak) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
  NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
icc (NextGen): command line warning #10006: ignoring unknown option  
  '-i\_version=19.1.2.254' [-Woption-ignored]

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

SPECrate®2017\_int\_base = 122

SPECrate®2017\_int\_peak = 125

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.2.254 Build 20200623  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

-----  
Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
icc (NextGen): command line warning #10006: ignoring unknown option  
'-i\_version=19.1.2.254' [-Woption-ignored]

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

-----  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
icc (NextGen): command line warning #10006: ignoring unknown option  
'-i\_version=19.1.2.254' [-Woption-ignored]

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.2.254 Build 20200623  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
icpc (NextGen): command line warning #10006: ignoring unknown option  
'-i\_version=19.1.2.254' [-Woption-ignored]

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

**SPECrate®2017\_int\_base = 122**

**SPECrate®2017\_int\_peak = 125**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

=====  
Fortran | 548.exchange2\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.2.254 Build 20200623  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.2.254/linux/compiler/lib/intel64\_lin  
-lqkmalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

SPECrate®2017\_int\_base = 122

SPECrate®2017\_int\_peak = 125

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fsto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.2.254/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.2.254/linux/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

SPECrate®2017\_int\_base = 122

SPECrate®2017\_int\_peak = 125

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.2.254/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.2.254/linux/compiler/lib/ia32_lin
-std=gnu89
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnnextgen
-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib
-ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -m64 -qnnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.2.254/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.2.254/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: basepeak = yes
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TN-55R  
(2.20 GHz, Intel Xeon Silver 4210)

SPECrate®2017\_int\_base = 122

SPECrate®2017\_int\_peak = 125

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

## Peak Optimization Flags (Continued)

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-25 09:12:16-0500.

Report generated on 2021-03-16 15:32:02 by CPU2017 PDF formatter v6255.

Originally published on 2021-03-16.