



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q, 2.60GHz)

**SPECrate®2017\_fp\_base = 454**

**SPECrate®2017\_fp\_peak = 458**

CPU2017 License: 9019


**Test Date:** Sep-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Apr-2021

**Tested by:** Cisco Systems

**Software Availability:** Dec-2020

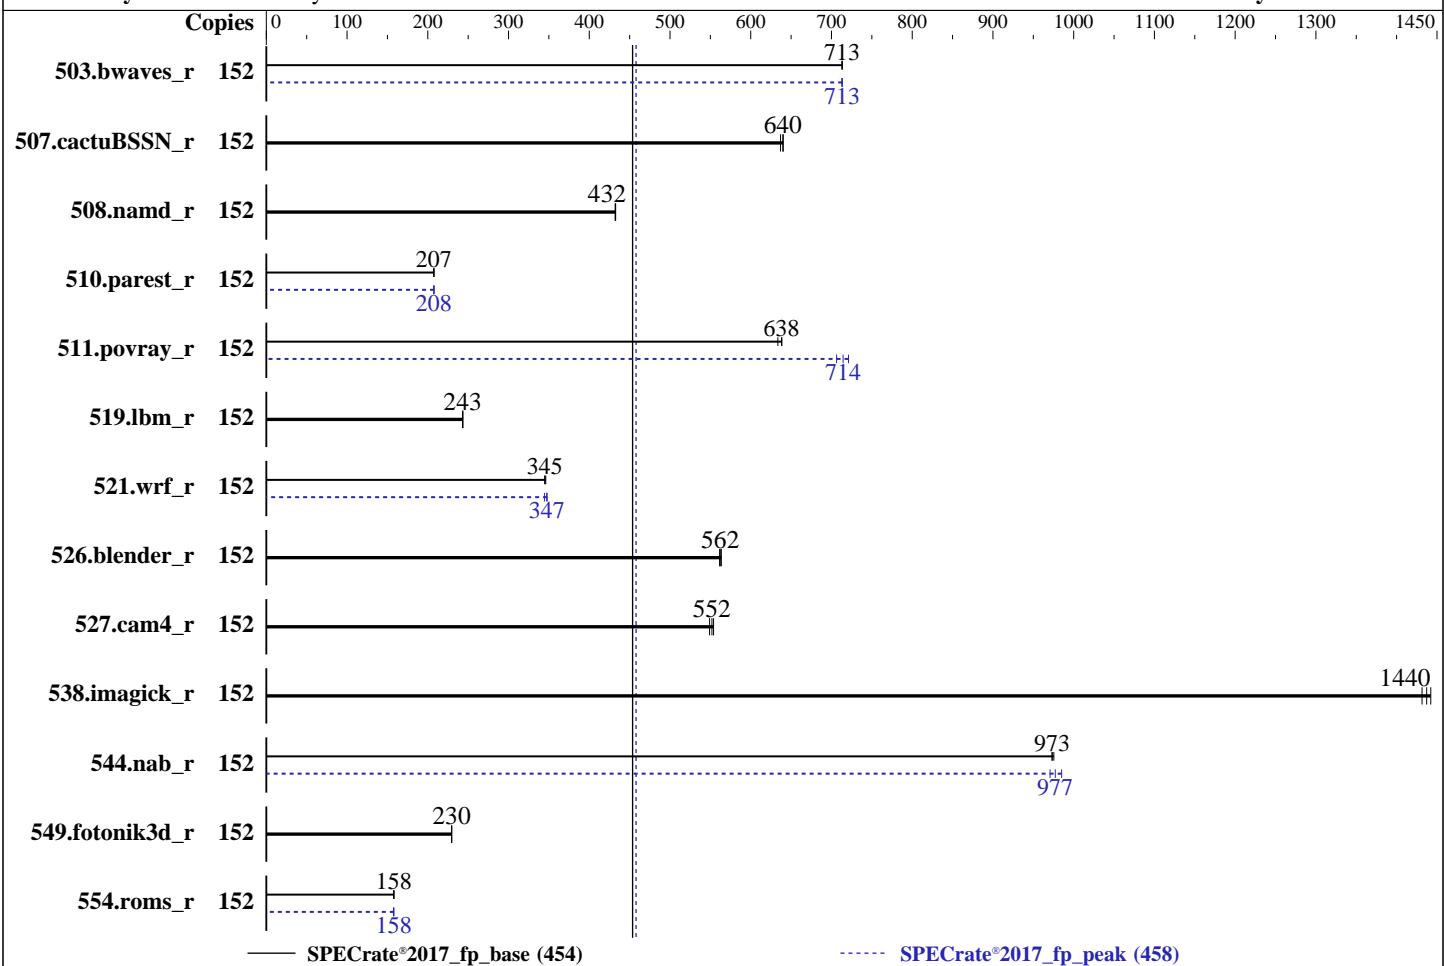

Hardware	
CPU Name:	Intel Xeon Platinum 8368Q
Max MHz:	3700
Nominal:	2600
Enabled:	76 cores, 2 chips, 2 threads/core
Orderable:	1,2 Chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	57 MB I+D on chip per chip
Other:	None
Memory:	1 TB (32 x 32 GB 2Rx4 PC4-3200V-R)
Storage:	1 x 960 GB M.2 SSD SATA
Other:	None

Software	
OS:	SUSE Linux Enterprise Server 15 SP2
Compiler:	5.3.18-22-default C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
Parallel:	C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Firmware:	No
File System:	Version 4.2.1d released Jul-2021
System State:	btrfs
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	64-bit
Other:	64-bit
Power Management:	jemalloc memory allocator V5.0.1 BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q, 2.60GHz)

**SPECrate®2017\_fp\_base = 454**

**SPECrate®2017\_fp\_peak = 458**

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2021

Tested by: Cisco Systems

Software Availability: Dec-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	152	2137	713	2138	713	<b>2137</b>	<b>713</b>	152	2138	713	<b>2137</b>	<b>713</b>	2137	713
507.cactubSSN_r	152	<b>301</b>	<b>640</b>	302	637	301	640	152	<b>301</b>	<b>640</b>	302	637	301	640
508.namd_r	152	334	432	334	433	<b>334</b>	<b>432</b>	152	334	432	334	433	<b>334</b>	<b>432</b>
510.parest_r	152	1918	207	1914	208	<b>1916</b>	<b>207</b>	152	1917	207	1914	208	<b>1916</b>	<b>208</b>
511.povray_r	152	<b>556</b>	<b>638</b>	560	634	556	639	152	492	721	<b>497</b>	<b>714</b>	502	706
519.lbm_r	152	<b>659</b>	<b>243</b>	658	243	659	243	152	<b>659</b>	<b>243</b>	658	243	659	243
521.wrf_r	152	<b>987</b>	<b>345</b>	984	346	987	345	152	<b>980</b>	<b>347</b>	988	344	979	348
526.blender_r	152	<b>412</b>	<b>562</b>	412	561	411	564	152	<b>412</b>	<b>562</b>	412	561	411	564
527.cam4_r	152	480	554	484	549	<b>482</b>	<b>552</b>	152	480	554	484	549	<b>482</b>	<b>552</b>
538.imagick_r	152	264	1430	262	1440	<b>263</b>	<b>1440</b>	152	264	1430	262	1440	<b>263</b>	<b>1440</b>
544.nab_r	152	263	973	262	975	<b>263</b>	<b>973</b>	152	260	985	<b>262</b>	<b>977</b>	264	971
549.fotonik3d_r	152	2580	230	2582	229	<b>2580</b>	<b>230</b>	152	2580	230	2582	229	<b>2580</b>	<b>230</b>
554.roms_r	152	1527	158	1531	158	<b>1531</b>	<b>158</b>	152	<b>1530</b>	<b>158</b>	1533	158	1530	158

**SPECrate®2017\_fp\_base = 454**

**SPECrate®2017\_fp\_peak = 458**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
cpupower frequency-set -g performance run as root to set the scaling governor to performance.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7940X CPU + 64GB RAM memory using openSUSE Leap 15.2  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q, 2.60GHz)

SPECrate®2017\_fp\_base = 454

SPECrate®2017\_fp\_peak = 458

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2021

Tested by: Cisco Systems

Software Availability: Dec-2020

## General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from [jemalloc.net](http://jemalloc.net) or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetcher set to Disabled

DCU Streamer Prefetch set to Disabled

UPI Link Enablement set to 1

UPI Power Management set to Enabled

Sub NUMA Clustering set to Enabled

LLC Dead Line set to Disabled

Memory Refresh Rate set to 1x Refresh

ADDDC Sparing set to Disabled

Patrol Scrub set to Disabled

Energy Efficient Turbo set to Enabled

Processor C6 Report set to Enabled

Processor C1E set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d

running on localhost Mon Sep 13 19:17:00 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz

2 "physical id"s (chips)

152 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 38

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

SPECrate®2017\_fp\_base = 454

SPECrate®2017\_fp\_peak = 458

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2021

Tested by: Cisco Systems

Software Availability: Dec-2020

## Platform Notes (Continued)

```
siblings : 76
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37
```

From lscpu from util-linux 2.33.1:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
Address sizes:        46 bits physical, 57 bits virtual
CPU(s):               152
On-line CPU(s) list: 0-151
Thread(s) per core:  2
Core(s) per socket:  38
Socket(s):            2
NUMA node(s):         2
Vendor ID:            GenuineIntel
CPU family:           6
Model:                106
Model name:           Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
Stepping:              6
CPU MHz:              3300.000
CPU max MHz:          3700.0000
CPU min MHz:          800.0000
BogoMIPS:             5200.00
Virtualization:       VT-x
L1d cache:            48K
L1i cache:            32K
L2 cache:              1280K
L3 cache:              58368K
NUMA node0 CPU(s):    0-37,76-113
NUMA node1 CPU(s):    38-75,114-151
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req avx512vbmi umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpocntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

**SPECCrate®2017\_fp\_base = 454**

**SPECCrate®2017\_fp\_peak = 458**

**CPU2017 License:** 9019

**Test Date:** Sep-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Apr-2021

**Tested by:** Cisco Systems

**Software Availability:** Dec-2020

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 58368 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27  
28 29 30 31 32 33 34 35 36 37 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94

95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113

node 0 size: 515599 MB

node 0 free: 514691 MB

node 1 cpus: 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62  
63 64 65 66 67 68 69 70 71 72 73 74 75 114 115 116 117 118 119 120 121 122 123 124 125

126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147

148 149 150 151

node 1 size: 515766 MB

node 1 free: 515024 MB

node distances:

node 0 1

0: 10 20

1: 20 10

From /proc/meminfo

MemTotal: 1056119284 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="SLES"

VERSION="15-SP2"

VERSION\_ID="15.2"

PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP2"

ID="sles"

ID\_LIKE="suse"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:

Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aebe) x86\_64  
x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q, 2.60GHz)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECrate®2017\_fp\_base = 454

SPECrate®2017\_fp\_peak = 458

Test Date: Sep-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

## Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Sep 13 19:11

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	222G	30G	191G	14%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Cisco Systems Inc
Product:	UCSC-C220-M6S
Serial:	WZP24430N7F

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x 0xCE00 M393A4K40DB3-CWE 32 GB 2 rank 3200

BIOS:

BIOS Vendor:	Cisco Systems, Inc.
BIOS Version:	C220M6.4.2.1d.0.0730210924
BIOS Date:	07/30/2021
BIOS Revision:	5.22

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	519.lbm_r(base, peak) 538.imagick_r(base, peak)
---	---

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

SPECCrate®2017\_fp\_base = 454

SPECCrate®2017\_fp\_peak = 458

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2021

Tested by: Cisco Systems

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

| 544.nab\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECrate®2017\_fp\_base = 454

SPECrate®2017\_fp\_peak = 458

Test Date: Sep-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

  
=====

C++, C, Fortran | 507.cactubssn\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

  
=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

  
=====

Fortran, C | 521.wrf\_r(peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

**SPECrate®2017\_fp\_base = 454**

**SPECrate®2017\_fp\_peak = 458**

**CPU2017 License:** 9019

**Test Date:** Sep-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Apr-2021

**Tested by:** Cisco Systems

**Software Availability:** Dec-2020

## Compiler Version Notes (Continued)

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

SPECrate®2017\_fp\_base = 454

SPECrate®2017\_fp\_peak = 458

CPU2017 License: 9019

Test Date: Sep-2021

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2021

Tested by: Cisco Systems

Software Availability: Dec-2020

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

**SPECrate®2017\_fp\_base = 454**

**SPECrate®2017\_fp\_peak = 458**

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Dec-2020

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

521.wrf\_r: ifort icc

527.cam4\_r: ifort icx

Benchmarks using both C and C++:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q,  
2.60GHz)

**SPECrate®2017\_fp\_base = 454**

**SPECrate®2017\_fp\_peak = 458**

**CPU2017 License:** 9019

**Test Date:** Sep-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Apr-2021

**Tested by:** Cisco Systems

**Software Availability:** Dec-2020

## Peak Compiler Invocation (Continued)

511.povray\_r: icpcicc

526.blender\_r: icpxicx

Benchmarks using Fortran, C, and C++:

icpxicxifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -festo  
-Ofast -qopt-mem-layout-trans=4  
-fimf-accuracy-bits=14:sqrt  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M6 (Intel Xeon Platinum 8368Q, 2.60GHz)

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECrate®2017\_fp\_base = 454**

**SPECrate®2017\_fp\_peak = 458**

**Test Date:** Sep-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Dec-2020

## Peak Optimization Flags (Continued)

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-revJ.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-revJ.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-13 22:17:00-0400.

Report generated on 2021-10-25 17:05:00 by CPU2017 PDF formatter v6442.

Originally published on 2021-10-25.