



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M6 (Intel Xeon Gold 6330H)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation


**SPECrate®2017\_fp\_base = 533**

**SPECrate®2017\_fp\_peak = 560**

**Test Date:** Nov-2021

**Hardware Availability:** Sep-2020

**Software Availability:** Dec-2020

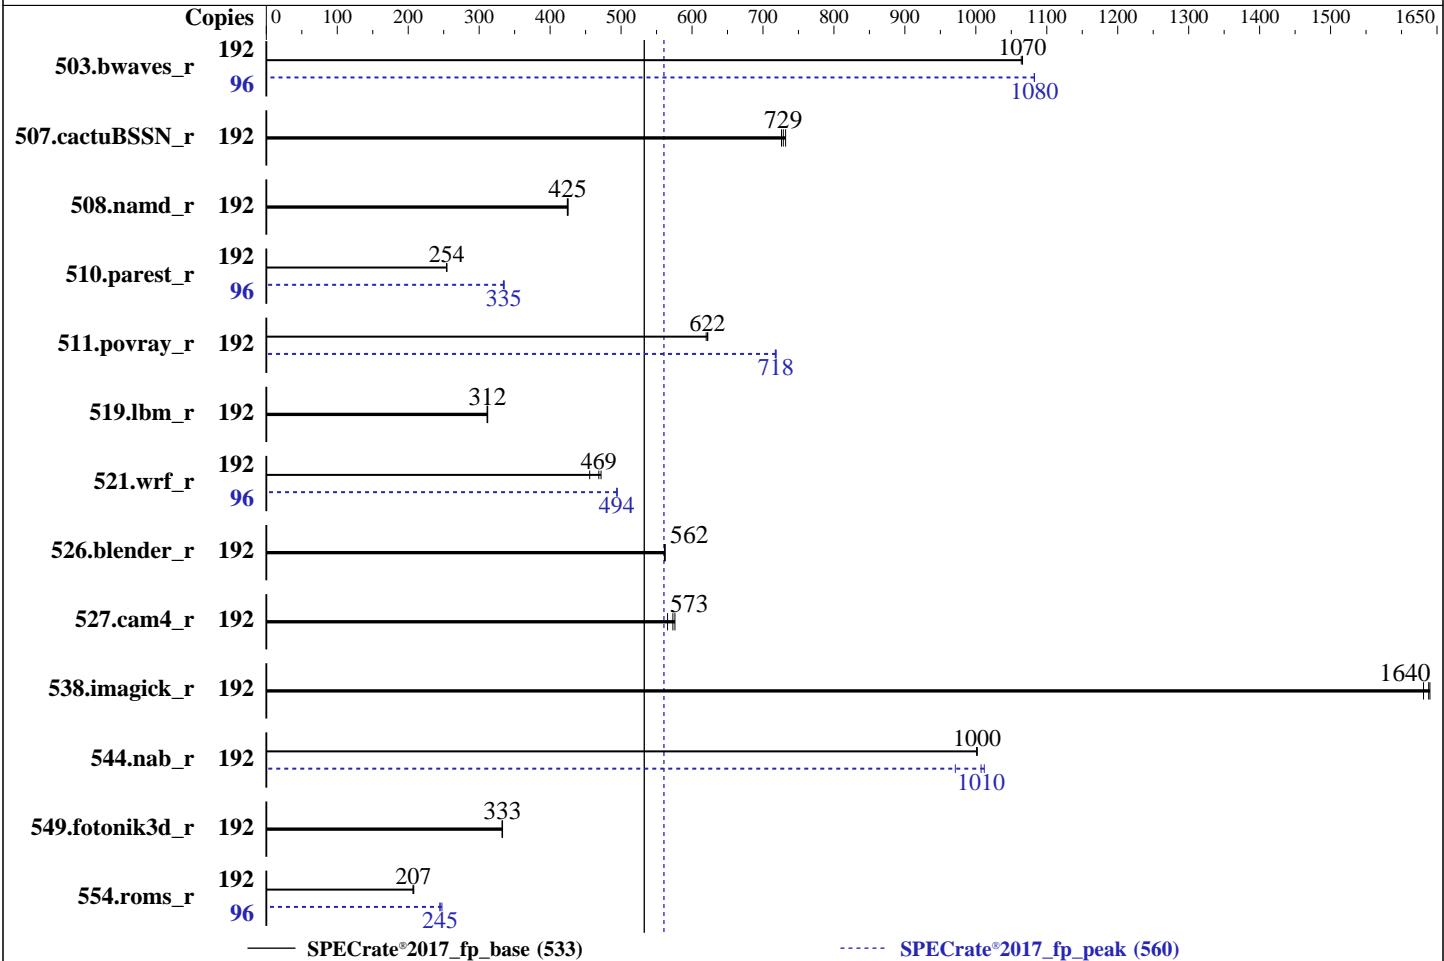

Hardware		Software	
CPU Name:	Intel Xeon Gold 6330H	OS:	Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
Max MHz:	3700	Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
Nominal:	2000		C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux;
Enabled:	96 cores, 4 chips, 2 threads/core		Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux
Orderable:	2,4 chips	Parallel:	No
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 05.00.00 released Jun-2021
L2:	1 MB I+D on chip per core	File System:	xfs
L3:	33 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R, running at 2933)	Peak Pointers:	64-bit
Storage:	1 x 1.9 TB NVME SSD	Other:	jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M6 (Intel Xeon Gold 6330H)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

**SPECrate®2017\_fp\_base = 533**

**SPECrate®2017\_fp\_peak = 560**

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	<b>1807</b>	<b>1070</b>	1810	1060	1806	1070	96	<b>889</b>	<b>1080</b>	889	1080	889	1080
507.cactusBSSN_r	192	<b>334</b>	<b>729</b>	335	726	332	732	192	<b>334</b>	<b>729</b>	335	726	332	732
508.namd_r	192	<b>429</b>	<b>425</b>	430	424	429	425	192	<b>429</b>	<b>425</b>	430	424	429	425
510.parest_r	192	<b>1975</b>	<b>254</b>	1978	254	1974	254	96	<b>749</b>	<b>335</b>	<b>750</b>	<b>335</b>	752	334
511.povray_r	192	<b>721</b>	<b>622</b>	723	620	721	622	192	<b>624</b>	<b>718</b>	<b>624</b>	<b>718</b>	625	717
519.lbm_r	192	<b>649</b>	<b>312</b>	649	312	650	311	192	<b>649</b>	<b>312</b>	649	312	650	311
521.wrf_r	192	944	456	<b>918</b>	<b>469</b>	912	472	96	435	494	435	494	<b>435</b>	<b>494</b>
526.blender_r	192	520	562	521	561	<b>521</b>	<b>562</b>	192	520	562	521	561	<b>521</b>	<b>562</b>
527.cam4_r	192	594	565	583	576	<b>586</b>	<b>573</b>	192	594	565	583	576	<b>586</b>	<b>573</b>
538.imagick_r	192	<b>291</b>	<b>1640</b>	291	1640	293	1630	192	<b>291</b>	<b>1640</b>	291	1640	293	1630
544.nab_r	192	323	1000	<b>323</b>	<b>1000</b>	323	1000	192	<b>321</b>	<b>1010</b>	333	971	319	1010
549.fotonik3d_r	192	2247	333	2252	332	<b>2248</b>	<b>333</b>	192	2247	333	2252	332	<b>2248</b>	<b>333</b>
554.roms_r	192	1468	208	1476	207	<b>1472</b>	<b>207</b>	96	623	245	<b>623</b>	<b>245</b>	616	248

**SPECrate®2017\_fp\_base = 533**

**SPECrate®2017\_fp\_peak = 560**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M6 (Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_base = 533

SPECrate®2017\_fp\_peak = 560

CPU2017 License: 3358

Test Date: Nov-2021

Test Sponsor: Inspur Corporation

Hardware Availability: Sep-2020

Tested by: Inspur Corporation

Software Availability: Dec-2020

## General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

BIOS configuration:

ENERGY\_PERF\_BIAS\_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

C1E Support set to Disable

Sysinfo program /home/CPU2017/bin/sysinfo

```
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Tue Nov 16 22:20:01 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6330H CPU @ 2.00GHz
```

```
        4 "physical id"s (chips)
```

```
        192 "processors"
```

```
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
```

```
cpu cores : 24
```

```
siblings : 48
```

```
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

```
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

```
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

```
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M6 (Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_base = 533

SPECrate®2017\_fp\_peak = 560

CPU2017 License: 3358

Test Date: Nov-2021

Test Sponsor: Inspur Corporation

Hardware Availability: Sep-2020

Tested by: Inspur Corporation

Software Availability: Dec-2020

## Platform Notes (Continued)

From lscpu from util-linux 2.32.1:

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 192  
On-line CPU(s) list: 0-191  
Thread(s) per core: 2  
Core(s) per socket: 24  
Socket(s): 4  
NUMA node(s): 8  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6330H CPU @ 2.00GHz  
Stepping: 11  
CPU MHz: 2800.059  
CPU max MHz: 3700.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4000.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 33792K  
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,96-98,102-104,108-110,114-116  
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,99-101,105-107,111-113,117-119  
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,120-122,126-128,132-134,138-140  
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,123-125,129-131,135-137,141-143  
NUMA node4 CPU(s): 48-50,54-56,60-62,66-68,144-146,150-152,156-158,162-164  
NUMA node5 CPU(s): 51-53,57-59,63-65,69-71,147-149,153-155,159-161,165-167  
NUMA node6 CPU(s): 72-74,78-80,84-86,90-92,168-170,174-176,180-182,186-188  
NUMA node7 CPU(s): 75-77,81-83,87-89,93-95,171-173,177-179,183-185,189-191  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtTopology nonstop\_tsc cpuid aperf mperf pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrandlahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 cdp\_l3 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local avx512\_bf16 dtherm ida arat pln pts pku ospke avx512\_vnni md\_clear flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 33792 KB

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 533

Inspur NF8260M6 (Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = 560

CPU2017 License: 3358

Test Date: Nov-2021

Test Sponsor: Inspur Corporation

Hardware Availability: Sep-2020

Tested by: Inspur Corporation

Software Availability: Dec-2020

## Platform Notes (Continued)

From numactl --hardware  
WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 96 97 98 102 103 104 108 109 110 114 115 116  
node 0 size: 192070 MB  
node 0 free: 180227 MB  
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 99 100 101 105 106 107 111 112 113 117 118  
119  
node 1 size: 193503 MB  
node 1 free: 183989 MB  
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 120 121 122 126 127 128 132 133 134  
138 139 140  
node 2 size: 193530 MB  
node 2 free: 184184 MB  
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 123 124 125 129 130 131 135 136 137  
141 142 143  
node 3 size: 193530 MB  
node 3 free: 184204 MB  
node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68 144 145 146 150 151 152 156 157 158  
162 163 164  
node 4 size: 193530 MB  
node 4 free: 184191 MB  
node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71 147 148 149 153 154 155 159 160 161  
165 166 167  
node 5 size: 193530 MB  
node 5 free: 184224 MB  
node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92 168 169 170 174 175 176 180 181 182  
186 187 188  
node 6 size: 193530 MB  
node 6 free: 184197 MB  
node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95 171 172 173 177 178 179 183 184 185  
189 190 191  
node 7 size: 193528 MB  
node 7 free: 184200 MB  
node distances:  
node 0 1 2 3 4 5 6 7  
0: 10 11 20 20 20 20 20 20  
1: 11 10 20 20 20 20 20 20  
2: 20 20 10 11 20 20 20 20  
3: 20 20 11 10 20 20 20 20  
4: 20 20 20 20 10 11 20 20  
5: 20 20 20 20 11 10 20 20  
6: 20 20 20 20 20 20 10 11  
7: 20 20 20 20 20 20 11 10

From /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

### Inspur NF8260M6 (Intel Xeon Gold 6330H)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 533

SPECrate®2017\_fp\_peak = 560

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## Platform Notes (Continued)

```
MemTotal: 1583876156 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/sbin/tuned-adm active
    Current active profile: throughput-performance
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux"
    VERSION="8.2 (Ootpa)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="8.2"
    PLATFORM_ID="platform:el8"
    PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
    ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Nov 16 11:31

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M6 (Intel Xeon Gold 6330H)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 533

SPECrate®2017\_fp\_peak = 560

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## Platform Notes (Continued)

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.7T	121G	1.6T	7%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Inspur
Product:	NF8260M6
Product Family:	Family
Serial:	380152314

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	05.00.00
BIOS Date:	06/23/2021
BIOS Revision:	5.19

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 519.1bm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)

=====

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

=====

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====

C++, C | 511.povray\_r(peak)

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 533

Inspur NF8260M6 (Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = 560

CPU2017 License: 3358

Test Date: Nov-2021

Test Sponsor: Inspur Corporation

Hardware Availability: Sep-2020

Tested by: Inspur Corporation

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M6 (Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_base = 533

SPECrate®2017\_fp\_peak = 560

CPU2017 License: 3358

Test Date: Nov-2021

Test Sponsor: Inspur Corporation

Hardware Availability: Sep-2020

Tested by: Inspur Corporation

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 533

Inspur NF8260M6 (Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = 560

CPU2017 License: 3358

Test Date: Nov-2021

Test Sponsor: Inspur Corporation

Hardware Availability: Sep-2020

Tested by: Inspur Corporation

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactusBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M6 (Intel Xeon Gold 6330H)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 533

SPECrate®2017\_fp\_peak = 560

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Dec-2020

## Base Portability Flags (Continued)

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 533

Inspur NF8260M6 (Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = 560

CPU2017 License: 3358

Test Date: Nov-2021

Test Sponsor: Inspur Corporation

Hardware Availability: Sep-2020

Tested by: Inspur Corporation

Software Availability: Dec-2020

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

521.wrf\_r: ifort icc

527.cam4\_r: ifort icx

Benchmarks using both C and C++:

511.povray\_r: icpc icc

526.blender\_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 533

Inspur NF8260M6 (Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = 560

CPU2017 License: 3358

Test Date: Nov-2021

Test Sponsor: Inspur Corporation

Hardware Availability: Sep-2020

Tested by: Inspur Corporation

Software Availability: Dec-2020

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -festo  
-Ofast -qopt-mem-layout-trans=4  
-fimf-accuracy-bits=14:sqrt  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-festo -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

521.wrf\_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

527.cam4\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 533

Inspur NF8260M6 (Intel Xeon Gold 6330H)

SPECrate®2017\_fp\_peak = 560

CPU2017 License: 3358

Test Date: Nov-2021

Test Sponsor: Inspur Corporation

Hardware Availability: Sep-2020

Tested by: Inspur Corporation

Software Availability: Dec-2020

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
526.blender_r: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
507.cactuBSSN_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.3.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-16 22:20:01-0500.

Report generated on 2021-12-22 12:25:37 by CPU2017 PDF formatter v6442.

Originally published on 2021-12-21.