



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECSpeed®2017_fp_base = 235

SPECSpeed®2017_fp_peak = 243

CPU2017 License: 3


Test Date: Feb-2022

Test Sponsor: HPE

Hardware Availability: Mar-2021

Tested by: HPE

Software Availability: Jan-2022

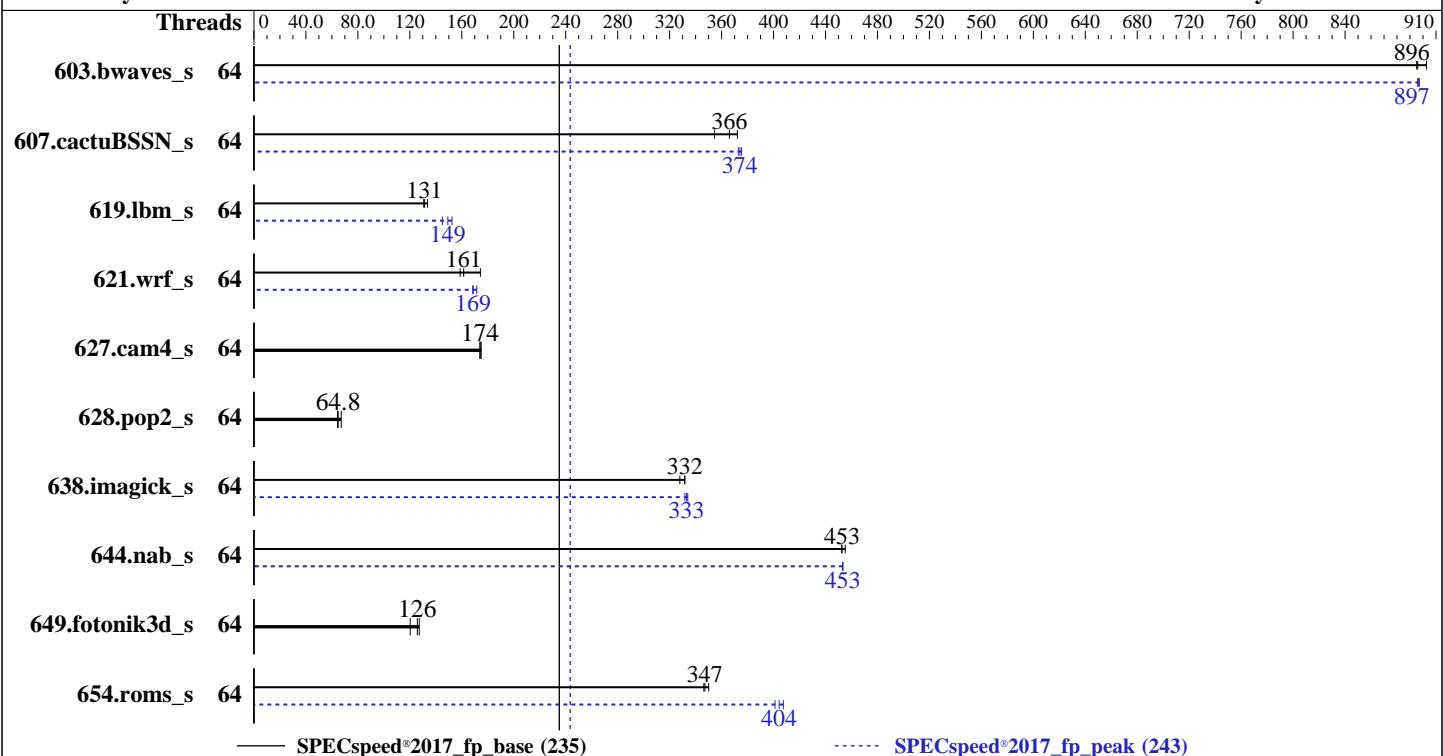

— SPECSpeed®2017_fp_base (235)

----- SPECSpeed®2017_fp_peak (243)

Hardware

CPU Name: AMD EPYC 7573X
Max MHz: 3600
Nominal: 2800
Enabled: 64 cores, 2 chips
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 768 MB I+D on chip per chip,
96 MB shared / 4 cores
Other: None
Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)
Storage: 1 x 480 GB SATA SSD, RAID 0
Other: None

Software

OS: Ubuntu 20.04.3 LTS (x86_64)
Compiler: Kernel 5.13.0-28-generic
Parallel: C/C++/Fortran: Version 3.2.0 of AOCC
Firmware: Yes
File System: HPE BIOS Version A42 v2.56 02/10/2022 released
System State: Feb-2022
Base Pointers: ext4
Peak Pointers: Run level 5 (multi-user)
Other: 64-bit
Power Management: jemalloc: jemalloc memory allocator library v5.1.0
BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Date: Feb-2022

Test Sponsor: HPE

Hardware Availability: Mar-2021

Tested by: HPE

Software Availability: Jan-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	65.8	896	65.4	903	65.9	895	64	65.8	897	65.8	897	65.9	896
607.cactuBSSN_s	64	44.8	372	45.5	366	47.0	355	64	44.6	374	44.4	375	44.7	373
619.lbm_s	64	39.9	131	40.1	131	39.2	134	64	34.4	152	36.1	145	35.1	149
621.wrf_s	64	75.9	174	81.9	161	83.3	159	64	77.1	172	78.3	169	78.5	168
627.cam4_s	64	50.9	174	51.0	174	50.7	175	64	50.9	174	51.0	174	50.7	175
628.pop2_s	64	177	67.2	183	64.8	184	64.4	64	177	67.2	183	64.8	184	64.4
638.imagick_s	64	44.0	328	43.5	332	43.5	332	64	43.2	334	43.5	332	43.3	333
644.nab_s	64	38.6	453	38.6	453	38.4	455	64	38.5	453	38.5	453	38.5	453
649.fotonik3d_s	64	71.6	127	72.5	126	75.8	120	64	71.6	127	72.5	126	75.8	120
654.roms_s	64	45.5	346	45.4	347	45.0	350	64	39.2	401	38.9	404	38.6	408

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
    "/home/cpu2017_speed/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017_sp
     eed/amd_speed_aocc320_milanx_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"
```

Environment variables set by runcpu during the 603.bwaves_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 638.imagick_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 644.nab_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

AMD SMT Option set to Disabled

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to One memory domain per socket

Thermal Configuration set to Maximum Cooling

Infinity Fabric Power Management set to Disabled

Infinity Fabric Performance State set to P0

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The system date and time as discovered by sysinfo is incorrect as the time was not updated prior to the run. The test_date field shows an accurate date for the result.

The system ROM used for this result contains microcode version 0x 0A001227h for the AMD EPYC 7nn3X family of processors. The reference code/AGESA version used in this ROM is version MilanPI 1.0.0.8.

Sysinfo program /home/cpu2017_speed/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on admin1-ProLiant-DL365-Gen10-Plus Mon Jan 10 14:08:08 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7573X 32-Core Processor

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Platform Notes (Continued)

```
2 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

From lscpu from util-linux 2.34:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
Address sizes:	48 bits physical, 48 bits virtual
CPU(s):	64
On-line CPU(s) list:	0-63
Thread(s) per core:	1
Core(s) per socket:	32
Socket(s):	2
NUMA node(s):	16
Vendor ID:	AuthenticAMD
CPU family:	25
Model:	1
Model name:	AMD EPYC 7573X 32-Core Processor
Stepping:	2
Frequency boost:	enabled
CPU MHz:	2800.000
CPU max MHz:	2800.0000
CPU min MHz:	1500.0000
BogoMIPS:	5589.12
Virtualization:	AMD-V
L1d cache:	2 MiB
L1i cache:	2 MiB
L2 cache:	32 MiB
L3 cache:	1.5 GiB
NUMA node0 CPU(s):	0-3
NUMA node1 CPU(s):	4-7
NUMA node2 CPU(s):	8-11
NUMA node3 CPU(s):	12-15
NUMA node4 CPU(s):	16-19
NUMA node5 CPU(s):	20-23
NUMA node6 CPU(s):	24-27
NUMA node7 CPU(s):	28-31
NUMA node8 CPU(s):	32-35
NUMA node9 CPU(s):	36-39

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Date: Feb-2022

Test Sponsor: HPE

Hardware Availability: Mar-2021

Tested by: HPE

Software Availability: Jan-2022

Platform Notes (Continued)

```

NUMA node10 CPU(s):          40-43
NUMA node11 CPU(s):          44-47
NUMA node12 CPU(s):          48-51
NUMA node13 CPU(s):          52-55
NUMA node14 CPU(s):          56-59
NUMA node15 CPU(s):          60-63
Vulnerability Itlb multihit: Not affected
Vulnerability Llft:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:     Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
                                pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                                pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
                                aperfmpfperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
                                xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
                                misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
                                bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs
                                ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 invpcid cqmq rdt_a rdseed adx smap
                                clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc
                                cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat
                                npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                pausefilter pfthreshold v_vmsave_vmlload vgif v_spec_ctrl umip pku ospke vaes
                                vpclmulqdq rdpid overflow_recov succor smca

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	2M	8	Data	1
L1i	32K	2M	8	Instruction	1
L2	512K	32M	8	Unified	2
L3	96M	1.5G	16	Unified	3

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0 1 2 3

node 0 size: 128711 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Platform Notes (Continued)

```
node 0 free: 128143 MB
node 1 cpus: 4 5 6 7
node 1 size: 129022 MB
node 1 free: 128927 MB
node 2 cpus: 8 9 10 11
node 2 size: 129022 MB
node 2 free: 128759 MB
node 3 cpus: 12 13 14 15
node 3 size: 129022 MB
node 3 free: 128949 MB
node 4 cpus: 16 17 18 19
node 4 size: 129022 MB
node 4 free: 128831 MB
node 5 cpus: 20 21 22 23
node 5 size: 128989 MB
node 5 free: 128935 MB
node 6 cpus: 24 25 26 27
node 6 size: 129022 MB
node 6 free: 128923 MB
node 7 cpus: 28 29 30 31
node 7 size: 116909 MB
node 7 free: 116868 MB
node 8 cpus: 32 33 34 35
node 8 size: 129022 MB
node 8 free: 128958 MB
node 9 cpus: 36 37 38 39
node 9 size: 129022 MB
node 9 free: 128958 MB
node 10 cpus: 40 41 42 43
node 10 size: 129022 MB
node 10 free: 128973 MB
node 11 cpus: 44 45 46 47
node 11 size: 129022 MB
node 11 free: 128975 MB
node 12 cpus: 48 49 50 51
node 12 size: 129022 MB
node 12 free: 128977 MB
node 13 cpus: 52 53 54 55
node 13 size: 129022 MB
node 13 free: 128978 MB
node 14 cpus: 56 57 58 59
node 14 size: 129022 MB
node 14 free: 128855 MB
node 15 cpus: 60 61 62 63
node 15 size: 129015 MB
node 15 free: 128914 MB
node distances:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Date: Feb-2022

Test Sponsor: HPE

Hardware Availability: Mar-2021

Tested by: HPE

Software Availability: Jan-2022

Platform Notes (Continued)

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32
1:	11	10	11	11	11	11	11	11	32	32	32	32	32	32	32	32
2:	11	11	10	11	11	11	11	11	32	32	32	32	32	32	32	32
3:	11	11	11	10	11	11	11	11	32	32	32	32	32	32	32	32
4:	11	11	11	11	10	11	11	11	32	32	32	32	32	32	32	32
5:	11	11	11	11	11	10	11	11	32	32	32	32	32	32	32	32
6:	11	11	11	11	11	11	10	11	32	32	32	32	32	32	32	32
7:	11	11	11	11	11	11	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	11	11	11	11	11	11
9:	32	32	32	32	32	32	32	32	11	10	11	11	11	11	11	11
10:	32	32	32	32	32	32	32	32	11	11	10	11	11	11	11	11
11:	32	32	32	32	32	32	32	32	11	11	11	10	11	11	11	11
12:	32	32	32	32	32	32	32	32	11	11	11	11	10	11	11	11
13:	32	32	32	32	32	32	32	32	11	11	11	11	11	10	11	11
14:	32	32	32	32	32	32	32	32	11	11	11	11	11	11	10	11
15:	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	10

From /proc/meminfo

```
MemTotal:           2101144604 kB
HugePages_Total:        0
Hugepagesize:       2048 kB
```

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

/usr/bin/lsb_release -d
Ubuntu 20.04.3 LTS

From /etc/*release* /etc/*version*

```
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.3 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.3 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

uname -a:

```
Linux admin1-ProLiant-DL365-Gen10-Plus 5.13.0-28-generic #31~20.04.1-Ubuntu SMP Wed
Jan 19 14:08:10 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Jan 10 10:27

SPEC is set to: /home/cpu2017_speed

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb2	ext4	439G	54G	363G	13%	/

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL365 Gen10 Plus
Product Family:	ProLiant
Serial:	CN70430NKR

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

9x Hynix HMABAGL7ABR4N-XN	128 GB	4 rank	3200
7x Samsung M386AAG40AM3-CWE	128 GB	4 rank	3200
16x UNKNOWN NOT AVAILABLE			

BIOS:

BIOS Vendor:	HPE
BIOS Version:	A42
BIOS Date:	02/10/2022
BIOS Revision:	2.56
Firmware Revision:	2.50

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
           | 644.nab_s(base, peak)
-----
```

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

```
=====
C++, C, Fortran | 607.cactusBSSN_s(base, peak)
-----
```

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
```

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
```

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

```
=====
Fortran      | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
           | 654.roms_s(base, peak)
-----
```

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Compiler Version Notes (Continued)

```
=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
-----
```

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
```

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

Base Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapi -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapi -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -flang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

```
638.imagick_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -freemap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

644.nab_s: Same as 638.imagick_s

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

649.fotonik3d_s: basepeak = yes

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.80 GHz, AMD EPYC 7573X)

SPECspeed®2017_fp_base = 235

SPECspeed®2017_fp_peak = 243

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-lcmt-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.html>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.xml>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-01-10 03:38:08-0500.

Report generated on 2022-04-01 13:23:17 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-21.