



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SSG-121E-NES24R  
(X13DSF-A , Intel Xeon Platinum 8454H)

**SPECrate®2017\_int\_base = 522**

**SPECrate®2017\_int\_peak = 535**

CPU2017 License: 001176


**Test Date:** Dec-2022

Test Sponsor: Supermicro

**Hardware Availability:** Jan-2023

Tested by: Supermicro

**Software Availability:** Jun-2022

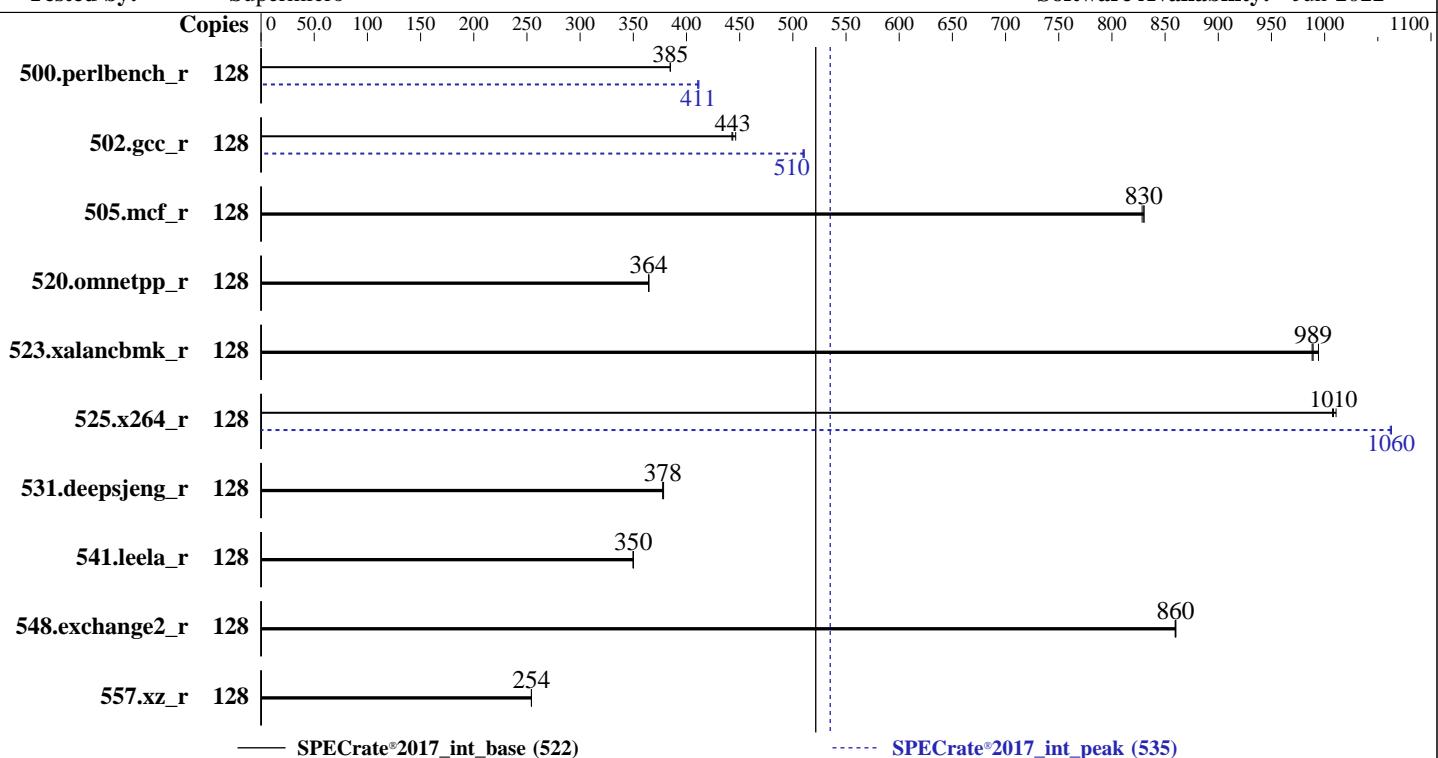

### Hardware

CPU Name: Intel Xeon Platinum 8454H  
Max MHz: 3400  
Nominal: 2100  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 82.5 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
Storage: 1 x 480 GB NVMe SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
Compiler: Kernel 5.14.21-150400.22-default  
C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Version 1.0 released Nov-2022  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SSG-121E-NES24R  
(X13DSF-A , Intel Xeon Platinum 8454H)

**SPECrate®2017\_int\_base = 522**

**SPECrate®2017\_int\_peak = 535**

CPU2017 License: 001176

Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>529</b>	<b>385</b>	530	385	529	385	128	<b>496</b>	<b>411</b>	495	412	496	411		
502.gcc_r	128	409	443	406	446	<b>409</b>	<b>443</b>	128	355	511	356	510	<b>355</b>	<b>510</b>		
505.mcf_r	128	249	830	250	828	<b>249</b>	<b>830</b>	128	249	830	250	828	<b>249</b>	<b>830</b>		
520.omnetpp_r	128	461	364	460	365	<b>461</b>	<b>364</b>	128	461	364	460	365	<b>461</b>	<b>364</b>		
523.xalancbmk_r	128	<b>137</b>	<b>989</b>	137	988	136	994	128	<b>137</b>	<b>989</b>	137	988	136	994		
525.x264_r	128	222	1010	222	1010	<b>222</b>	<b>1010</b>	128	211	1060	211	1060	<b>211</b>	<b>1060</b>		
531.deepsjeng_r	128	388	378	<b>388</b>	<b>378</b>	388	378	128	388	378	<b>388</b>	<b>378</b>	388	378		
541.leela_r	128	606	350	<b>606</b>	<b>350</b>	605	350	128	606	350	<b>606</b>	<b>350</b>	605	350		
548.exchange2_r	128	390	859	<b>390</b>	<b>860</b>	390	860	128	390	859	<b>390</b>	<b>860</b>	390	860		
557.xz_r	128	544	254	544	254	<b>544</b>	<b>254</b>	128	544	254	544	254	<b>544</b>	<b>254</b>		

**SPECrate®2017\_int\_base = 522**

**SPECrate®2017\_int\_peak = 535**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SSG-121E-NES24R  
(X13DSF-A , Intel Xeon Platinum 8454H)

SPECCrate®2017\_int\_base = 522

SPECCrate®2017\_int\_peak = 535

CPU2017 License: 001176

Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY\_PERF\_BIAS\_CFG mode = Performance

DCU Streamer Prefetcher = Disable

SNC = Enable SNC4 (4-clusters)

LLC Dead Line Alloc = Disable

KTI Prefetch = Enable

Stale AtoS = Disable

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a6lec0915b55891ef0e16acafc64d  
running on 135-179-217 Fri Dec 2 13:46:23 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8454H  
2 "physical id"s (chips)  
128 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 32  
siblings : 64  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31

From lscpu from util-linux 2.37.2:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 46 bits physical, 57 bits virtual  
Byte Order: Little Endian  
CPU(s): 128

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SSG-121E-NES24R  
(X13DSF-A , Intel Xeon Platinum 8454H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 522

SPECrate®2017\_int\_peak = 535

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

## Platform Notes (Continued)

```

On-line CPU(s) list: 0-127
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8454H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 8
Frequency boost: enabled
CPU max MHz: 2101.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
      pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperf mperf tsc_known_freq pn1 pclmulqdq dtes64 monitor ds_cpl vmx
      smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
      tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
      epb cat_13 cat_12 cdp_13 invpcid_single cdp_12 ssbd mba ibrs ibpb stibp
      ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
      hle avx2 smp emi erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
      xsaved xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      split_lock_detect avx_vnmi avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi
      umip pkru ospke waitpkg avx512_vbmi2 gfn1 vaes vpclmulqdq avx512_vnmi avx512_bitalg
      tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdir64b enqcmd
      fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d
      arch_capabilities
Virtualization: VT-x
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 165 MiB (2 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
L1d     48K       3M   12 Data          1       64        1           64
L1i     32K       2M    8 Instruction   1       64        1           64

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SSG-121E-NES24R  
(X13DSF-A , Intel Xeon Platinum 8454H)

SPECrate®2017\_int\_base = 522

SPECrate®2017\_int\_peak = 535

CPU2017 License: 001176

Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

## Platform Notes (Continued)

L2	2M	128M	16	Unified	2	2048	1	64
L3	82.5M	165M	15	Unified	3	90112	1	64

```
/proc/cpuinfo cache data
cache size : 84480 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 64146 MB
node 0 free: 63570 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 64507 MB
node 1 free: 64174 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 64507 MB
node 2 free: 63999 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 64473 MB
node 3 free: 64223 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 64507 MB
node 4 free: 64208 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 64507 MB
node 5 free: 64179 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 64507 MB
node 6 free: 64307 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 64460 MB
node 7 free: 63870 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 12 12 12 21 21 21 21
 1: 12 10 12 12 21 21 21 21
 2: 12 12 10 12 21 21 21 21
 3: 12 12 12 10 21 21 21 21
 4: 21 21 21 10 12 12 12 12
 5: 21 21 21 12 10 12 12 12
 6: 21 21 21 12 12 10 12 12
 7: 21 21 21 21 12 12 12 10
```

From /proc/meminfo

```
MemTotal:      527995576 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has
ondemand

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP4"
  VERSION_ID="15.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
  ID="sles"
  ID_LIKE="suse"
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SSG-121E-NES24R  
(X13DSF-A , Intel Xeon Platinum 8454H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 522

SPECrate®2017\_int\_peak = 535

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

## Platform Notes (Continued)

```
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp4"
```

```
uname -a:
Linux 135-179-217 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux
```

```
Kernel self-reported vulnerability status:
```

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Dec 2 13:45
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2  xfs   445G  8.0G  437G  2%  /
```

```
From /sys/devices/virtual/dmi/id
Vendor:        Supermicro
Product:       Super Server
Product Family: Family
Serial:        0123456789
```

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The "dmidecode" program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
16x Samsung M321R4GA3BB6-CQKEG 32 GB 2 rank 4800
```

```
BIOS:
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     1.0
BIOS Date:        11/29/2022
BIOS Revision:    5.29
```

```
(End of data from sysinfo program)
```

## Compiler Version Notes

```
=====
C | 502.gcc_r(peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SSG-121E-NES24R  
(X13DSF-A , Intel Xeon Platinum 8454H)

SPECrate®2017\_int\_base = 522

SPECrate®2017\_int\_peak = 535

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

## Compiler Version Notes (Continued)

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C      | 502.gcc_r(peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
Fortran | 548.exchange2_r(base, peak)
```

```
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SSG-121E-NES24R  
(X13DSF-A , Intel Xeon Platinum 8454H)

SPECrate®2017\_int\_base = 522

SPECrate®2017\_int\_peak = 535

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SSG-121E-NES24R  
(X13DSF-A , Intel Xeon Platinum 8454H)

SPECrate®2017\_int\_base = 522

SPECrate®2017\_int\_peak = 535

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc  
  
502.gcc\_r: -m32  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32\_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

557.xz\_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SSG-121E-NES24R  
(X13DSF-A , Intel Xeon Platinum 8454H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 522

SPECrate®2017\_int\_peak = 535

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-02 00:46:22-0500.

Report generated on 2024-01-29 17:15:23 by CPU2017 PDF formatter v6716.

Originally published on 2023-01-10.