



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573


Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

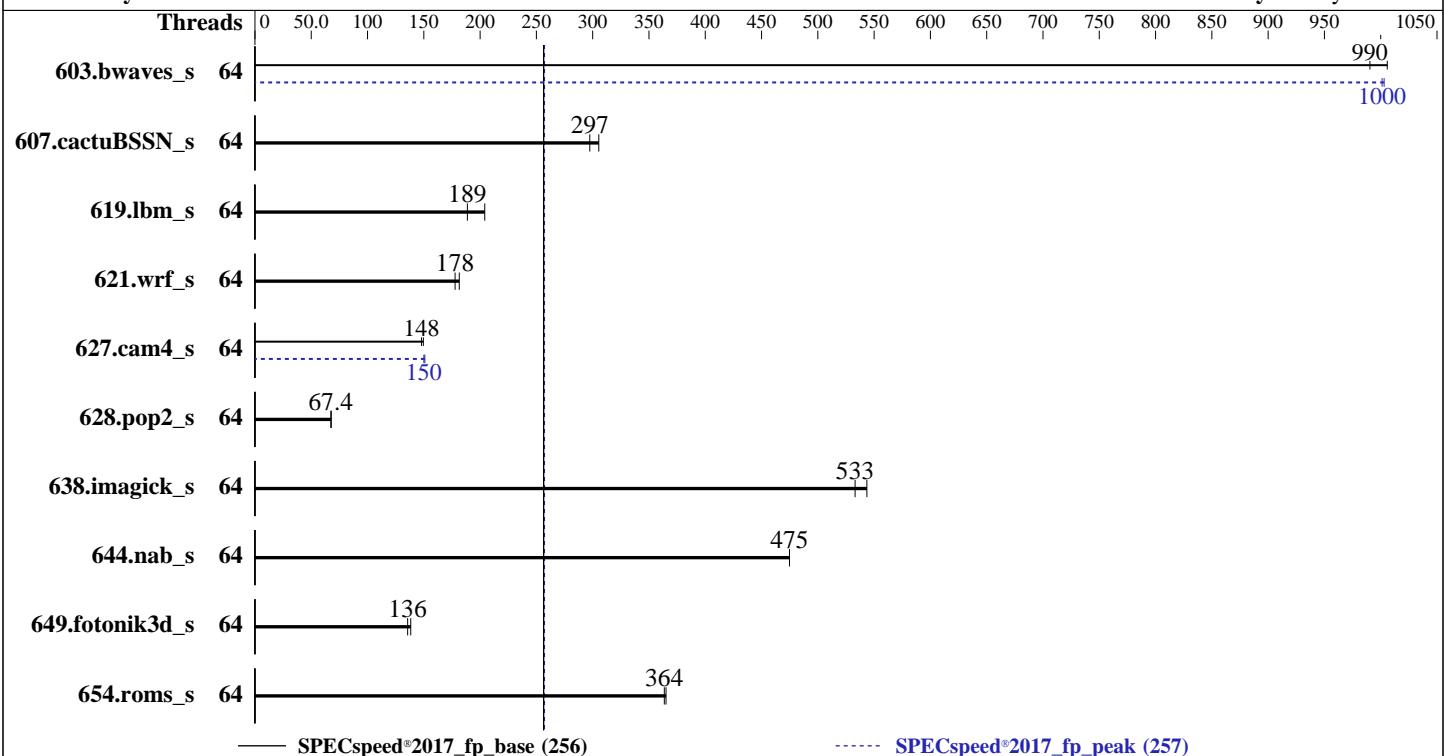

— SPECSpeed®2017_fp_base (256)

----- SPECSpeed®2017_fp_peak (257)

Hardware

CPU Name: Intel Xeon Gold 6430
Max MHz: 3400
Nominal: 2100
Enabled: 64 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)
Storage: 125 GB on tmpfs
Other: None

Software

OS: Red Hat Enterprise Linux 8.6 (Ootpa) 4.18.0-372.9.1.el8.x86_64
Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version 0.3.1 released Nov-2022
File System: tmpfs
System State: Run level 5 (graphical multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	59.6	990	58.7	1010			64	58.9	1000	58.8	1000		
607.cactuBSSN_s	64	56.0	297	54.6	305			64	56.0	297	54.6	305		
619.lbm_s	64	27.8	189	25.7	204			64	27.8	189	25.7	204		
621.wrf_s	64	72.9	181	74.4	178			64	72.9	181	74.4	178		
627.cam4_s	64	59.9	148	59.3	150			64	59.1	150	58.7	151		
628.pop2_s	64	176	67.4	175	67.8			64	176	67.4	175	67.8		
638.imagick_s	64	27.1	533	26.5	544			64	27.1	533	26.5	544		
644.nab_s	64	36.8	475	36.8	475			64	36.8	475	36.8	475		
649.fotonik3d_s	64	67.2	136	65.9	138			64	67.2	136	65.9	138		
654.roms_s	64	43.1	365	43.3	364			64	43.1	365	43.3	364		

SPECSpeed®2017_fp_base = 256

SPECSpeed®2017_fp_peak = 257

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
    Logical Processor : Disabled
    Sub NUMA Cluster : 2-way Clustering
    Optimizer Mode : Enabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
    C1E : Disabled
    C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
    PCI ASPM L1 Link
    Power Management : Disabled
```

```
Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sun Jan 15 01:24:15 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
10. who -r
11. Systemd service manager version: systemd 239 (239-58.el8)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
22. Disk information
23. /sys/devices/virtual/dmi/id
24. dmidecode
25. BIOS
```

```
1. uname -a
Linux localhost.localdomain 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19 EDT 2022 x86_64 x86_64
x86_64 GNU/Linux
```

```
2. w
01:24:15 up 2:38, 1 user, load average: 5.50, 5.95, 3.55
USER      TTY      FROM           LOGIN@     IDLE     PCPU WHAT
donald    :1       :1           22:49 ?xdm?   30.10s  0.00s /usr/libexec/gdm-x-session
--register-session --run-script gnome-session
```

```
3. Username
From environment variable $USER: root
From the command 'logname': donald
```

```
4. ulimit -a
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4125077
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

real-time priority	(-r) 0
stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 4125077
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 18  
/usr/lib/systemd/systemd --user  
/usr/libexec/gnome-terminal-server  
bash  
sudo su  
su  
bash  
/bin/bash ./DELL_speed.sh  
/bin/bash ./dell-norun-main.sh speed  
/bin/bash ./dell-norun-main.sh speed  
/bin/bash ./dell-norun-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt --define  
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc  
/bin/bash ./dell-norun-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt --define  
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc  
runcpu --nobuild --action validate --define default-platform-flags -c  
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=64 --tune base,peak -o all --define drop_caches  
--iterations 2 --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc fpspeed  
runcpu --nobuild --action validate --define default-platform-flags --configfile  
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=64 --tune base,peak --output_format all  
--define drop_caches --iterations 2 --output_format csv,html,pdf,txt --define  
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode speed --tune base:peak --size refspeed fpspeed  
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0  
--from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
```

6. /proc/cpuinfo

model name	: Intel(R) Xeon(R) Gold 6430
vendor_id	: GenuineIntel
cpu family	: 6
model	: 143
stepping	: 8
microcode	: 0x2b000111
bugs	: spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores	: 32
siblings	: 32
2 physical ids (chips)	

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.32.1:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                64
On-line CPU(s) list:  0-63
Thread(s) per core:   1
Core(s) per socket:   32
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel
CPU family:            6
Model:                 143
Model name:            Intel(R) Xeon(R) Gold 6430
BIOS Model name:      Intel(R) Xeon(R) Gold 6430
Stepping:              8
CPU MHz:               3337.167
BogoMIPS:              4200.00
L1d cache:             48K
L1i cache:             32K
L2 cache:              2048K
L3 cache:              61440K
NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60
NUMA node1 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62
NUMA node2 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61
NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                      acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                      arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf
                      tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16
                      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
                      f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmil
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60

node 0 size: 257240 MB

node 0 free: 255260 MB

node 1 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62

node 1 size: 258044 MB

node 1 free: 254980 MB

node 2 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61

node 2 size: 258044 MB

node 2 free: 249617 MB

node 3 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63

node 3 size: 257999 MB

node 3 free: 255069 MB

node distances:

node 0 1 2 3

0: 10 12 21 21

1: 12 10 21 21

2: 21 21 10 12

3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1056080544 kB

10. who -r

run-level 5 Jan 14 22:47

11. Systemd service manager version: systemd 239 (239-58.el8)

Default Target Status

graphical degraded

12. Failed units, from systemctl list-units --state=failed

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
UNIT           LOAD   ACTIVE   SUB    DESCRIPTION
* dnf-makecache.service loaded failed failed dnf makecache
```

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd audited autovt@ avahi-daemon bluetooth chronyd crond cups display-manager firewalld gdm getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned libstoragemgmt libvирtd loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvmefc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd syslog timedatectl tuned udisks2 vdo vgaauthd vmtoolsd
disabled	arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed debug-shell dnsmasq ebtables gssproxy hwloc-dump-hwdata initial-setup initial-setup-reconfiguration iprdump iprinit iprupdate iscsid iscsiuio kpatch kvm_stat ledmon libvirt-guests man-db-restart-cache-update ndctl-monitor netcf-transaction nfs-blkmap nfs-convert nfs-server nftables numad nvmf-autoconnect oddjobd podman podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts saslauthd serial-getty@ speech-dispatcherd ssh-keygen@ switcheroo-control systemd-nspawn@ systemd-resolved tcsd upower virtinterfaced virtnetworkd virtnodedevd virtnwfilterd virtproxyd virtqemud virtsecretd virtstoraged wpa_supplicant
indirect	spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd virtlogd
masked	systemd-timedated

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-372.9.1.el8.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=auto
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

15. cpupower frequency-info

```
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

16. tuned-adm active

Current active profile: throughput-performance

17. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	0
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

18. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

20. OS release

From /etc/*-release /etc/*-version	
os-release	Red Hat Enterprise Linux 8.6 (Ootpa)
redhat-release	Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release	Red Hat Enterprise Linux release 8.6 (Ootpa)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
itlb_multihit Not affected
l1tf Not affected
mds Not affected
meltdown Not affected
spec_store_bypass Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1 Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2 Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds Not affected
tsx_async_abort Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example
<https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

22. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	9.6G	116G	8%	/mnt/ramdisk

23. /sys/devices/virtual/dmi/id

Vendor:	Dell Inc.
Product:	PowerEdge C6620
Product Family:	PowerEdge
Serial:	SL6C201

24. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

15x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800, configured at 4400
1x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800, configured at 4400

25. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	Dell Inc.
BIOS Version:	0.3.1
BIOS Date:	11/24/2022
BIOS Revision:	0.3



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-fno-math-errno -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-fno-standard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fllto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 256

PowerEdge C6620 (Intel Xeon Gold 6430)

SPECSpeed®2017_fp_peak = 257

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Peak Optimization Flags (Continued)

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

```
649.fotonik3d_s: basepeak = yes
```

```
654.roms_s: basepeak = yes
```

Benchmarks using both Fortran and C:

```
621.wrf_s: basepeak = yes
```

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
628.pop2_s: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
607.cactuBSSN_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-15 01:24:15-0500.

Report generated on 2023-02-01 18:31:15 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.