



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_base = 862

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

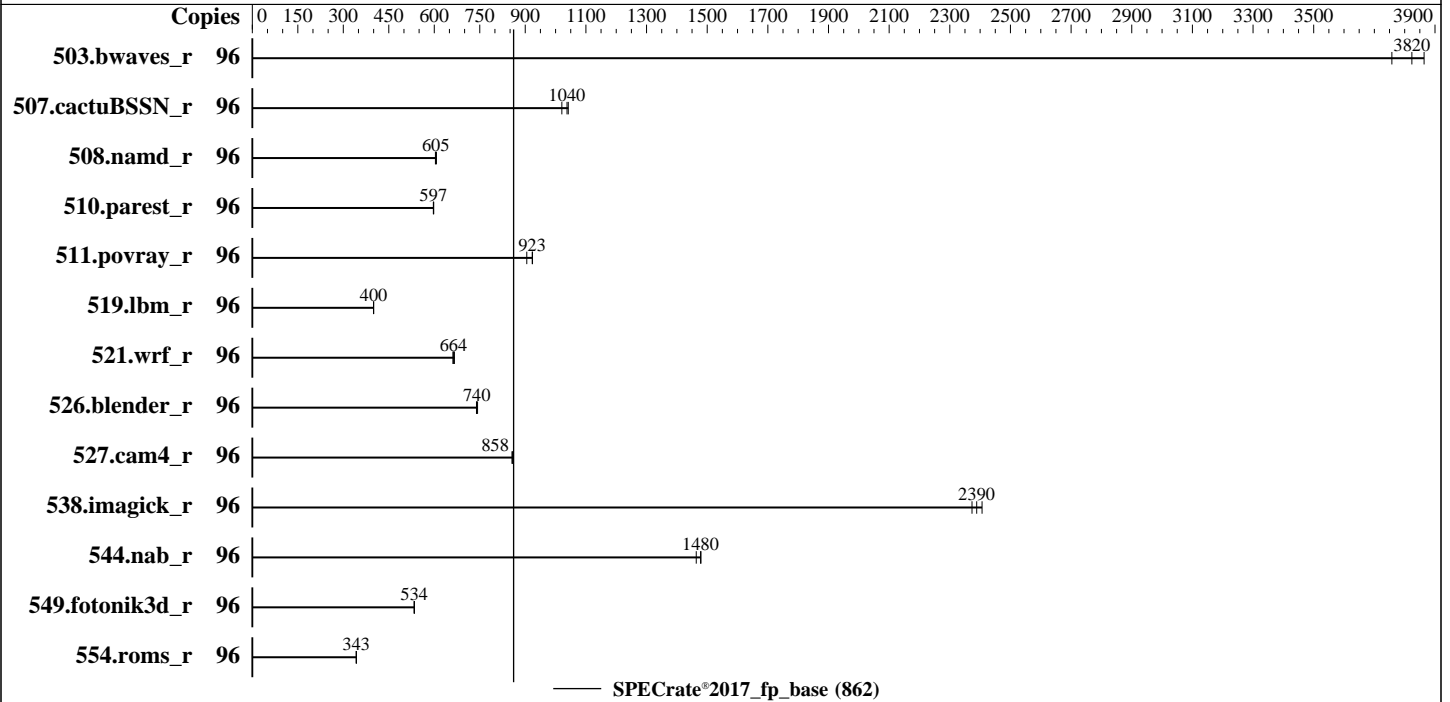

### Hardware

CPU Name: Intel Xeon Platinum 8468H  
 Max MHz: 3800  
 Nominal: 2100  
 Enabled: 96 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Lenovo BIOS Version ESE109L 1.10 released Jan-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	249	3860	<u>252</u>	<u>3820</u>	256	3760							
507.cactuBSSN_r	96	119	1020	117	1040	<u>117</u>	<u>1040</u>							
508.namd_r	96	<u>151</u>	<u>605</u>	150	607	151	604							
510.parest_r	96	421	597	420	598	<u>421</u>	<u>597</u>							
511.povray_r	96	243	924	248	905	<u>243</u>	<u>923</u>							
519.lbm_r	96	253	400	253	400	<u>253</u>	<u>400</u>							
521.wrf_r	96	<u>324</u>	<u>664</u>	323	666	325	661							
526.blender_r	96	198	739	<u>198</u>	<u>740</u>	197	743							
527.cam4_r	96	<u>196</u>	<u>858</u>	196	856	195	860							
538.imagick_r	96	<u>100</u>	<u>2390</u>	101	2370	99.2	2410							
544.nab_r	96	<u>109</u>	<u>1480</u>	109	1480	110	1460							
549.fotonik3d_r	96	700	535	701	534	<u>700</u>	<u>534</u>							
554.roms_r	96	445	343	445	343	<u>445</u>	<u>343</u>							

SPECrate®2017\_fp\_base = 862

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/j  
e5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## General Notes (Continued)

Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

Hyper-Threading set to Disabled

SNC set to SNC4

LLC Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on test1 Tue Mar 21 11:34:32 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

### Platform Notes (Continued)

- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

#### 1. uname -a

```
Linux test1 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86_64
x86_64 x86_64 GNU/Linux
```

#### 2. w

```
11:34:32 up 3 min, 1 user, load average: 0.72, 1.31, 0.62
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU WHAT
root     tty1    -             11:33       7.00s      1.05s  0.01s -bash
```

#### 3. Username

```
From environment variable $USER: root
```

#### 4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2062589
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2062589
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

#### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

### Platform Notes (Continued)

```

login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define cores=96 --define physicalfirst --define
invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define cores=96 --define physicalfirst --define
invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode rate
--tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.281/templogs/preenv.fprate.281.0.log --lognum 281.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0

```

#### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8468H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 48
siblings       : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      46 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            96

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

### Platform Notes (Continued)

```

On-line CPU(s) list:          0-95
Vendor ID:                   GenuineIntel
Model name:                   Intel(R) Xeon(R) Platinum 8468H
CPU family:                   6
Model:                        143
Thread(s) per core:          1
Core(s) per socket:           48
Socket(s):                    2
Stepping:                     8
BogoMIPS:                     4200.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                                vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                                flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
                                erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:               VT-x
L1d cache:                    4.5 MiB (96 instances)
L1i cache:                    3 MiB (96 instances)
L2 cache:                     192 MiB (96 instances)
L3 cache:                     210 MiB (2 instances)
NUMA node(s):                 8
NUMA node0 CPU(s):            0-11
NUMA node1 CPU(s):            12-23
NUMA node2 CPU(s):            24-35
NUMA node3 CPU(s):            36-47
NUMA node4 CPU(s):            48-59
NUMA node5 CPU(s):            60-71
NUMA node6 CPU(s):            72-83
NUMA node7 CPU(s):            84-95
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

### Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation: Enhanced IBRS, IBPB conditional, RSB filling  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-11

node 0 size: 64138 MB

node 0 free: 63654 MB

node 1 cpus: 12-23

node 1 size: 64508 MB

node 1 free: 64250 MB

node 2 cpus: 24-35

node 2 size: 64508 MB

node 2 free: 64274 MB

node 3 cpus: 36-47

node 3 size: 64508 MB

node 3 free: 64126 MB

node 4 cpus: 48-59

node 4 size: 64508 MB

node 4 free: 64365 MB

node 5 cpus: 60-71

node 5 size: 64508 MB

node 5 free: 64367 MB

node 6 cpus: 72-83

node 6 size: 64508 MB

node 6 free: 64314 MB

node 7 cpus: 84-95

node 7 size: 64480 MB

node 7 free: 64266 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	21	21	21	21
1:	12	10	12	12	21	21	21	21
2:	12	12	10	12	21	21	21	21
3:	12	12	12	10	21	21	21	21
4:	21	21	21	21	10	12	12	12
5:	21	21	21	21	12	10	12	12

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

### Platform Notes (Continued)

```

6:  21  21  21  21  12  12  10  12
7:  21  21  21  21  12  12  12  10

```

9. /proc/meminfo

MemTotal: 528047400 kB

10. who -r

run-level 3 Mar 21 11:32

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target  Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance iscsi
                issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
                smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewalld gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiui
                issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb rdisc
                rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                systemd-time-wait-sync systemd-timesyncd
generated      ntp_sync
indirect       wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=f976c541-a329-4c54-ba84-4be16556ee18
splash=silent
mitigations=auto
quiet
security=apparmor

```

14. cpupower frequency-info

```

analyzing CPU 0:
  Unable to determine current policy
  boost state support:

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

### Platform Notes (Continued)

Supported: yes  
Active: yes

-----  
15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

-----  
16. /sys/kernel/mm/transparent\_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

-----  
18. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

### 19. Disk information

```

SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sdb2       xfs   894G  96G  798G  11% /

```

### 20. /sys/devices/virtual/dmi/id

```

Vendor:          Lenovo
Product:         ThinkSystem SR630 V3
Product Family: ThinkSystem
Serial:          1234567890

```

### 21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  1x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800
  5x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800
  10x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

```

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      Lenovo
BIOS Version:     ESE109L-1.10
BIOS Date:        01/07/2023
BIOS Revision:    1.10
Firmware Revision: 1.0

```

## Compiler Version Notes

```

=====
C          | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 508.namd_r(base) 510.parest_r(base)
=====

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

### Compiler Version Notes (Continued)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Mar-2023

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Feb-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 862

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Mar-2023

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Feb-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2022

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.10 GHz, Intel Xeon Platinum 8468H)

SPECrate®2017\_fp\_base = 862

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-20 23:34:32-0400.

Report generated on 2023-04-12 12:46:39 by CPU2017 PDF formatter v6442.

Originally published on 2023-04-11.