



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

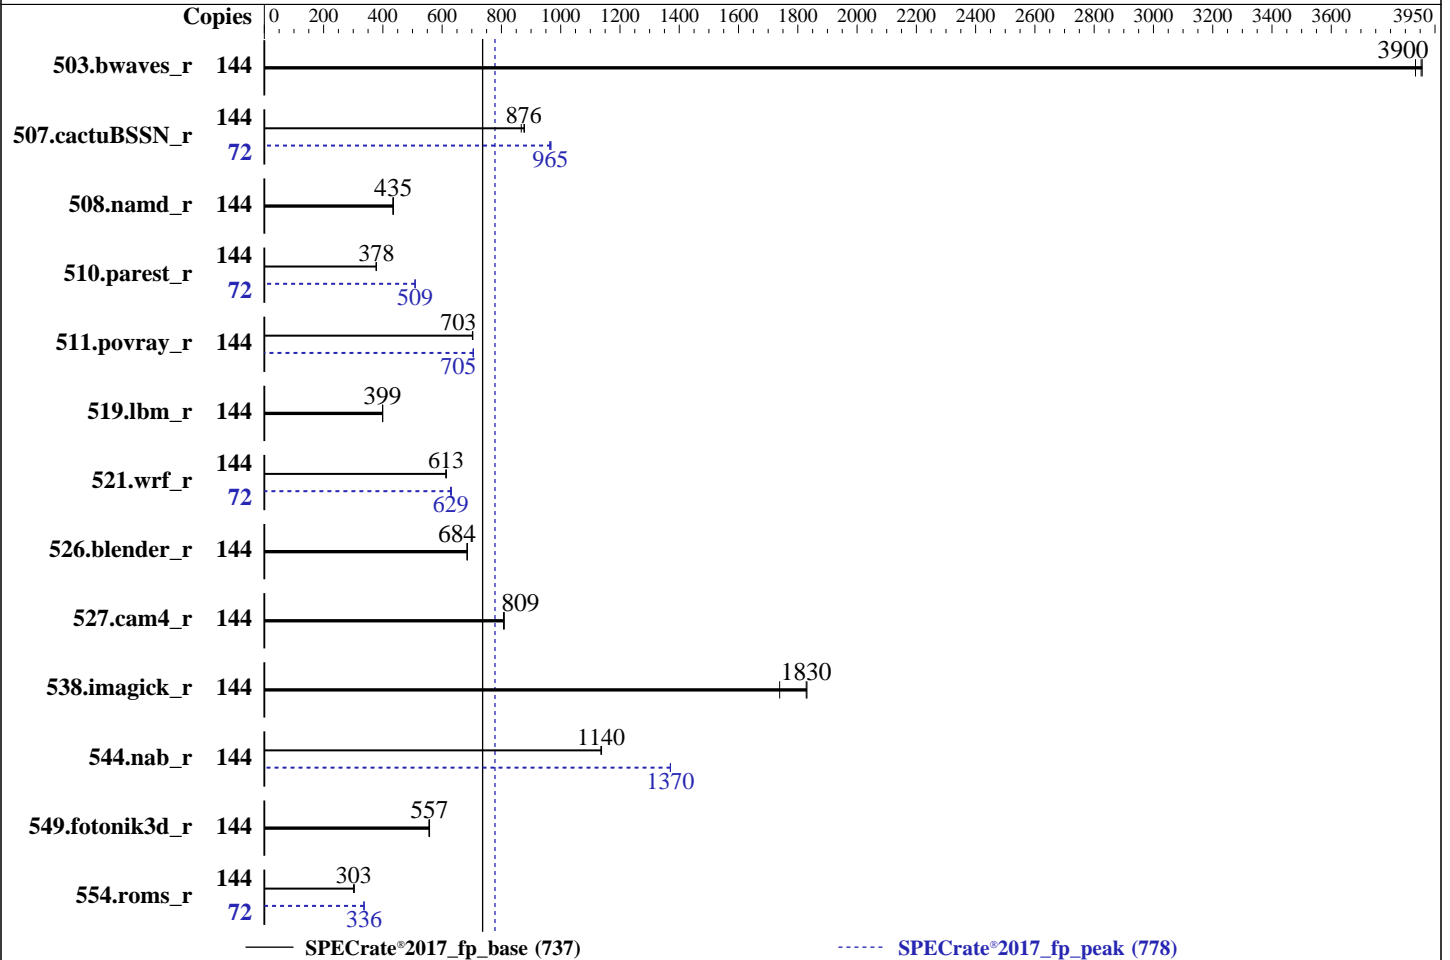

### Hardware

CPU Name: Intel Xeon Platinum 8452Y  
 Max MHz: 3200  
 Nominal: 2000  
 Enabled: 72 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 67.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1.6 TB PCIE NVME SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 0503 released Feb-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	372	3880	<b><u>370</u></b>	<b><u>3900</u></b>	370	3910	144	372	3880	<b><u>370</u></b>	<b><u>3900</u></b>	370	3910
507.cactuBSSN_r	144	<b><u>208</u></b>	<b><u>876</u></b>	210	867	208	878	72	<b><u>94.4</u></b>	<b><u>965</u></b>	94.2	967	94.7	963
508.namd_r	144	<b><u>314</u></b>	<b><u>435</u></b>	314	436	315	434	144	<b><u>314</u></b>	<b><u>435</u></b>	314	436	315	434
510.parest_r	144	999	377	997	378	<b><u>997</u></b>	<b><u>378</u></b>	72	<b><u>370</u></b>	<b><u>509</u></b>	370	509	370	509
511.povray_r	144	479	702	478	703	<b><u>478</u></b>	<b><u>703</u></b>	144	477	704	<b><u>477</u></b>	<b><u>705</u></b>	477	706
519.lbm_r	144	380	399	<b><u>380</u></b>	<b><u>399</u></b>	380	399	144	380	399	<b><u>380</u></b>	<b><u>399</u></b>	380	399
521.wrf_r	144	525	614	<b><u>526</u></b>	<b><u>613</u></b>	527	613	72	<b><u>256</u></b>	<b><u>629</u></b>	255	631	256	629
526.blender_r	144	320	685	<b><u>320</u></b>	<b><u>684</u></b>	321	684	144	320	685	<b><u>320</u></b>	<b><u>684</u></b>	321	684
527.cam4_r	144	311	809	312	807	<b><u>311</u></b>	<b><u>809</u></b>	144	311	809	312	807	<b><u>311</u></b>	<b><u>809</u></b>
538.imagick_r	144	206	1740	196	1830	<b><u>196</u></b>	<b><u>1830</u></b>	144	206	1740	196	1830	<b><u>196</u></b>	<b><u>1830</u></b>
544.nab_r	144	<b><u>213</u></b>	<b><u>1140</u></b>	213	1140	213	1140	144	177	1370	<b><u>177</u></b>	<b><u>1370</u></b>	177	1370
549.fotonik3d_r	144	1007	558	1011	555	<b><u>1007</u></b>	<b><u>557</u></b>	144	1007	558	1011	555	<b><u>1007</u></b>	<b><u>557</u></b>
554.roms_r	144	760	301	<b><u>756</u></b>	<b><u>303</u></b>	754	303	72	340	336	340	336	<b><u>340</u></b>	<b><u>336</u></b>

SPECrate®2017\_fp\_base = **737**

SPECrate®2017\_fp\_peak = **778**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/cpull9/lib/intel64:/cpull9/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

### General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS Configuration:  
 VT-d = Disabled  
 Patrol Scrub = Disabled  
 SNC = Enable SNC4 (4-clusters)  
 Engine Boost = Aggressive  
 SR-IOV Support = Disabled  
 BMC Configuration:  
 Fan mode = Full speed mode

Sysinfo program /cpul19/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on localhost Sun Apr 9 21:09:40 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. sysctl
  16. /sys/kernel/mm/transparent\_hugepage
  17. /sys/kernel/mm/transparent\_hugepage/khugepaged
  18. OS release
  19. Disk information
  20. /sys/devices/virtual/dmi/id
  21. dmidecode
  22. BIOS
- 
1. uname -a  
 Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
 x86\_64 x86\_64 x86\_64 GNU/Linux

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

-----
2. w
  21:09:40 up 2 days,  4:26,  2 users,  load average: 95.72, 132.11, 139.01
USER      TTY      FROM          LOGIN@      IDLE   JCPU   PCPU   WHAT
root      tty1     -              Fri16       2days 1.08s  0.01s -bash
root      tty2     -              Fri16       2days 0.02s  0.02s -bash

```

```

-----
3. Username
  From environment variable $USER:  root

```

```

-----
4. ulimit -a
 core file size          (blocks, -c) unlimited
 data seg size          (kbytes, -d) unlimited
 scheduling priority     (-e) 0
 file size               (blocks, -f) unlimited
 pending signals         (-i) 4126762
 max locked memory      (kbytes, -l) 64
 max memory size        (kbytes, -m) unlimited
 open files              (-n) 1024
 pipe size               (512 bytes, -p) 8
 POSIX message queues   (bytes, -q) 819200
 real-time priority     (-r) 0
 stack size              (kbytes, -s) unlimited
 cpu time                (seconds, -t) unlimited
 max user processes     (-u) 4126762
 virtual memory          (kbytes, -v) unlimited
 file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 -c
ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=72 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 --configfile
ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=72 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.242/temlogs/preenv.fprate.242.0.log --lognum 242.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpull9

```

```

-----
6. /proc/cpuinfo
 model name      : Intel(R) Xeon(R) Platinum 8452Y
 vendor_id      : GenuineIntel
 cpu family     : 6
 model          : 143
 stepping       : 8
 microcode      : 0x2b000161
 bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
 cpu cores      : 36
 siblings       : 72
 2 physical ids (chips)

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

### Platform Notes (Continued)

144 processors (hardware threads)

physical id 0: core ids 0-35

physical id 1: core ids 0-35

physical id 0: apicids 0-71

physical id 1: apicids 128-199

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      144
On-line CPU(s) list:         0-143
Vendor ID:                   GenuineIntel
Model name:                  Intel(R) Xeon(R) Platinum 8452Y
CPU family:                  6
Model:                       143
Thread(s) per core:         2
Core(s) per socket:         36
Socket(s):                   2
Stepping:                    8
CPU max MHz:                 3200.0000
CPU min MHz:                 800.0000
BogoMIPS:                    4000.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                             clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                             lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                             nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                             ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                             sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                             lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                             invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                             tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                             avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                             avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                             xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                             ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                             tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                             enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                             amx_tile flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   3.4 MiB (72 instances)
L1i cache:                   2.3 MiB (72 instances)
L2 cache:                    144 MiB (72 instances)
L3 cache:                    135 MiB (2 instances)
NUMA node(s):                8
NUMA node0 CPU(s):           0-8,72-80
NUMA node1 CPU(s):           9-17,81-89
NUMA node2 CPU(s):           18-26,90-98
NUMA node3 CPU(s):           27-35,99-107
NUMA node4 CPU(s):           36-44,108-116
NUMA node5 CPU(s):           45-53,117-125
NUMA node6 CPU(s):           54-62,126-134

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

NUMA node7 CPU(s):          63-71,135-143
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	67.5M	135M	15	Unified	3	73728	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-8,72-80
node 0 size: 128660 MB
node 0 free: 116241 MB
node 1 cpus: 9-17,81-89
node 1 size: 129019 MB
node 1 free: 121509 MB
node 2 cpus: 18-26,90-98
node 2 size: 129019 MB
node 2 free: 121413 MB
node 3 cpus: 27-35,99-107
node 3 size: 129019 MB
node 3 free: 121476 MB
node 4 cpus: 36-44,108-116
node 4 size: 129019 MB
node 4 free: 121468 MB
node 5 cpus: 45-53,117-125
node 5 size: 129019 MB
node 5 free: 121510 MB
node 6 cpus: 54-62,126-134
node 6 size: 129019 MB
node 6 free: 121375 MB
node 7 cpus: 63-71,135-143
node 7 size: 128938 MB
node 7 free: 121423 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  21  21  21  21
1:  12  10  12  12  21  21  21  21
2:  12  12  10  12  21  21  21  21
3:  12  12  12  10  21  21  21  21
4:  21  21  21  21  10  12  12  12
5:  21  21  21  21  12  10  12  12
6:  21  21  21  21  12  12  10  12
7:  21  21  21  21  12  12  12  10

```

9. /proc/meminfo

MemTotal: 1056475804 kB

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

### Platform Notes (Continued)

-----  
10. who -r  
run-level 3 Apr 7 16:44  
-----

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running  
-----

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged  
irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections  
postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4  
wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd  
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap  
nvme-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd\_generate\_opts  
snmpd snmptrapd svnservice systemd-boot-check-no-failures systemd-network-generator  
systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2  
indirect wickedd  
-----

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=1821a225-9785-4821-9a33-99bd3ded8cae  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
-----

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 3.20 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes  
-----

15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness            60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode     0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /cpull9
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p8 xfs 1.3T 78G 1.2T 7% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          ASUSTeK COMPUTER INC.
Product:         RS720-E11-RS12U
Product Family: Server

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends Inc.
BIOS Version:     0503
BIOS Date:        01/31/2023
BIOS Revision:    5.3

```





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

### Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

SPECrate®2017\_fp\_base = 737

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 778

**CPU2017 License:** 9016

**Test Date:** Apr-2023

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Feb-2023

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int  
-qopt-zmm-usage=high -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.00 GHz, Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_base = 737

SPECrate®2017\_fp\_peak = 778

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-09 09:09:39-0400.

Report generated on 2023-05-09 16:00:19 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.