



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

**SPECSpeed®2017\_fp\_base = 171**

**SPECSpeed®2017\_fp\_peak = 171**

CPU2017 License: 3


**Test Date:** Apr-2023

Test Sponsor: HPE

**Hardware Availability:** Mar-2023

Tested by: HPE

**Software Availability:** Dec-2022

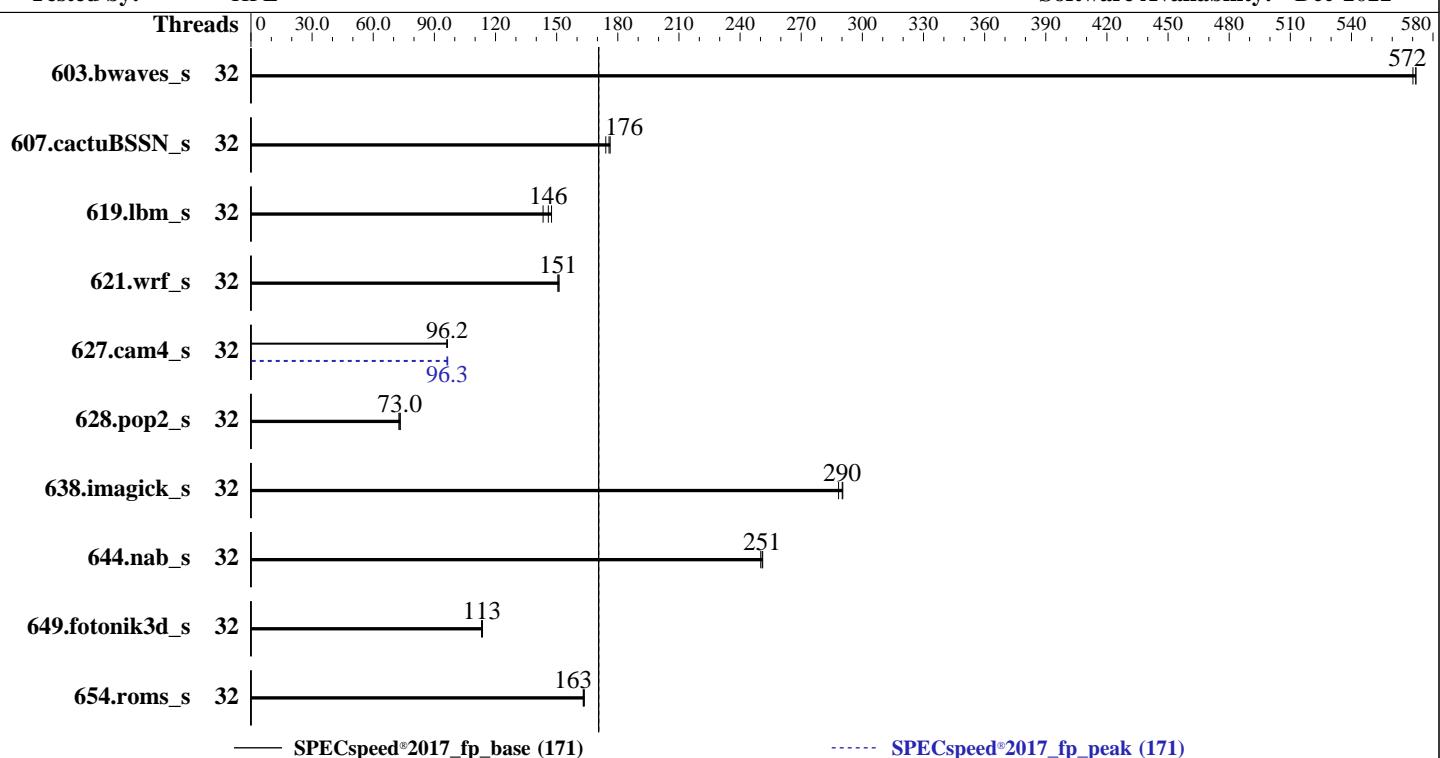

— SPECSpeed®2017\_fp\_base (171)

----- SPECSpeed®2017\_fp\_peak (171)

## Hardware

CPU Name: Intel Xeon Gold 5415+  
 Max MHz: 4100  
 Nominal: 2900  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 22.5 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

## OS:

SUSE Linux Enterprise Server 15 SP4

Kernel 5.14.21-150400.22-default

C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;

Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;

C/C++: Version 2023.0 of Intel C/C++ Compiler for Linux

Yes

HPE BIOS Version v1.30 03/01/2023 released Mar-2023

xfs

Run level 5 (multi-user)

64-bit

64-bit

jemalloc memory allocator V5.0.1

## Compiler:

BIOS and OS set to prefer performance at the cost of additional power usage

## Software

### Parallel:

Firmware:

### File System:

System State:

### Base Pointers:

Run level 5 (multi-user)

### Peak Pointers:

64-bit

### Other:

jemalloc memory allocator V5.0.1

### Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

**SPECspeed®2017\_fp\_base = 171**

**SPECspeed®2017\_fp\_peak = 171**

CPU2017 License: 3

Test Date: Apr-2023

Test Sponsor: HPE

Hardware Availability: Mar-2023

Tested by: HPE

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	<b>103</b>	<b>572</b>	103	572	103	570	32	<b>103</b>	<b>572</b>	103	572	103	570
607.cactuBSSN_s	32	95.7	174	94.6	176	<b>94.9</b>	<b>176</b>	32	95.7	174	94.6	176	<b>94.9</b>	<b>176</b>
619.lbm_s	32	35.5	147	<b>35.9</b>	<b>146</b>	36.5	143	32	35.5	147	<b>35.9</b>	<b>146</b>	36.5	143
621.wrf_s	32	87.8	151	<b>87.7</b>	<b>151</b>	87.5	151	32	87.8	151	<b>87.7</b>	<b>151</b>	87.5	151
627.cam4_s	32	92.2	96.1	92.0	96.4	<b>92.1</b>	<b>96.2</b>	32	92.1	96.3	<b>92.1</b>	<b>96.3</b>	91.8	96.6
628.pop2_s	32	164	72.6	<b>163</b>	<b>73.0</b>	162	73.3	32	164	72.6	<b>163</b>	<b>73.0</b>	162	73.3
638.imagick_s	32	50.0	288	49.7	290	<b>49.7</b>	<b>290</b>	32	50.0	288	49.7	290	<b>49.7</b>	<b>290</b>
644.nab_s	32	<b>69.7</b>	<b>251</b>	69.6	251	69.9	250	32	<b>69.7</b>	<b>251</b>	69.6	251	69.9	250
649.fotonik3d_s	32	80.6	113	80.2	114	<b>80.4</b>	<b>113</b>	32	80.6	113	80.2	114	<b>80.4</b>	<b>113</b>
654.roms_s	32	<b>96.5</b>	<b>163</b>	96.2	164	96.5	163	32	<b>96.5</b>	<b>163</b>	96.2	164	96.5	163
<b>SPECspeed®2017_fp_base = 171</b>														
<b>SPECspeed®2017_fp_peak = 171</b>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

**SPECspeed®2017\_fp\_base = 171**

**SPECspeed®2017\_fp\_peak = 171**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Apr-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Gold 5415+ processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Dead Block Predictor set to Enabled

Workload Profile set to Custom

Intel DMT Link Frequency set to Gen2 Speed

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to No Package State

The reported date by sysinfo is incorrect due to computer clock being not set correctly.

The correct test date is: Apr-2023.

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Jul 28 14:55:03 2022
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. sysctl
  16. /sys/kernel/mm/transparent\_hugepage
  17. /sys/kernel/mm/transparent\_hugepage/khugepaged
  18. OS release
  19. Disk information
  20. /sys/devices/virtual/dmi/id
  21. dmidecode
  22. BIOS
- 

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_fp\_base = 171

SPECspeed®2017\_fp\_peak = 171

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
14:55:03 up 15 min, 0 users, load average: 0.07, 0.06, 0.10
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 2062886
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 2062886
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpspeed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base,peak -o all --define
  drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 5415+
vendor_id       : GenuineIntel
cpu family      : 6
model          : 143
stepping        : 8
microcode       : 0x2b0001b0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 8
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

**SPECspeed®2017\_fp\_base = 171**

**SPECspeed®2017\_fp\_peak = 171**

CPU2017 License: 3

**Test Date:** Apr-2023

Test Sponsor: HPE

**Hardware Availability:** Mar-2023

Tested by: HPE

**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
siblings      : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 128-143
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	32
On-line CPU(s) list:	0-31
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) Gold 5415+
CPU family:	6
Model:	143
Thread(s) per core:	2
Core(s) per socket:	8
Socket(s):	2
Stepping:	8
BogoMIPS:	5800.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc art cpuid aperf fmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erts invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect coldemote movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lll arch_capabilities
Virtualization:	VT-x
L1d cache:	768 KiB (16 instances)
L1i cache:	512 KiB (16 instances)
L2 cache:	32 MiB (16 instances)
L3 cache:	45 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-7,16-23
NUMA node1 CPU(s):	8-15,24-31
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

**SPECspeed®2017\_fp\_base = 171**

**SPECspeed®2017\_fp\_peak = 171**

CPU2017 License: 3

**Test Date:** Apr-2023

Test Sponsor: HPE

**Hardware Availability:** Mar-2023

Tested by: HPE

**Software Availability:** Dec-2022

## Platform Notes (Continued)

Vulnerability Spectre v2:

Mitigation: Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-7,16-23
node 0 size: 257756 MB
node 0 free: 256186 MB
node 1 cpus: 8-15,24-31
node 1 size: 257989 MB
node 1 free: 257184 MB
node distances:
node 0 1
  0: 10 20
  1: 20 10
```

-----  
9. /proc/meminfo

```
MemTotal:      528124240 kB
```

-----  
10. who -r  
run-level 5 Jul 28 14:40

-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target     Status
graphical          running
```

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@ haveged irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmiievfd iscsid iscsiuio issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nm-cloud-setup nmb openvpn@ ostree-remount pppoe pppoe-server rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 upower wpa_supplicant@
indirect	pcscd saned@ wickedd

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

SPECspeed®2017\_fp\_base = 171

SPECspeed®2017\_fp\_peak = 171

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
    root=UUID=16038a66-0f95-499e-a756-89b7efc430ae
    splash=silent
    resume=/dev/disk/by-uuid/1ac00a3a-7fbb-40b6-8213-f8e2decaf1b0
    mitigations=auto
    quiet
    security=apparmor
```

```
-----  
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

```
-----  
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

```
-----  
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

**SPECspeed®2017\_fp\_base = 171**

**SPECspeed®2017\_fp\_peak = 171**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Apr-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

### 19. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	349G	90G	260G	26%	/home

### 20. /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL360 Gen11
Product Family:	ProLiant
Serial:	CNX20800PZ

### 21. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

1x Hynix HMCG88AEBRA168N	32 GB	2 rank	4800, configured at 4400
7x Hynix HMCG88MEBRA113N	32 GB	2 rank	4800, configured at 4400
8x Hynix HMCG88MEBRA115N	32 GB	2 rank	4800, configured at 4400

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	HPE
BIOS Version:	1.30
BIOS Date:	03/01/2023
BIOS Revision:	1.30
Firmware Revision:	1.20

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactusBSSN\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

**SPECspeed®2017\_fp\_base = 171**

**SPECspeed®2017\_fp\_peak = 171**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Apr-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

**SPECspeed®2017\_fp\_base = 171**

**SPECspeed®2017\_fp\_peak = 171**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Apr-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

**SPECspeed®2017\_fp\_base = 171**

**SPECspeed®2017\_fp\_peak = 171**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Apr-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP  
-Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.html>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.90 GHz, Intel Xeon Gold 5415+)

**SPECspeed®2017\_fp\_base = 171**

**SPECspeed®2017\_fp\_peak = 171**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2022-07-28 05:25:03-0400.

Report generated on 2023-05-23 19:04:14 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.