



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Platinum 8468H, 2.10GHz)

**SPECSpeed®2017\_fp\_base = 336**

**SPECSpeed®2017\_fp\_peak = 336**

CPU2017 License: 9019


**Test Date:** May-2023

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Mar-2023

**Tested by:** Cisco Systems

**Software Availability:** Dec-2022

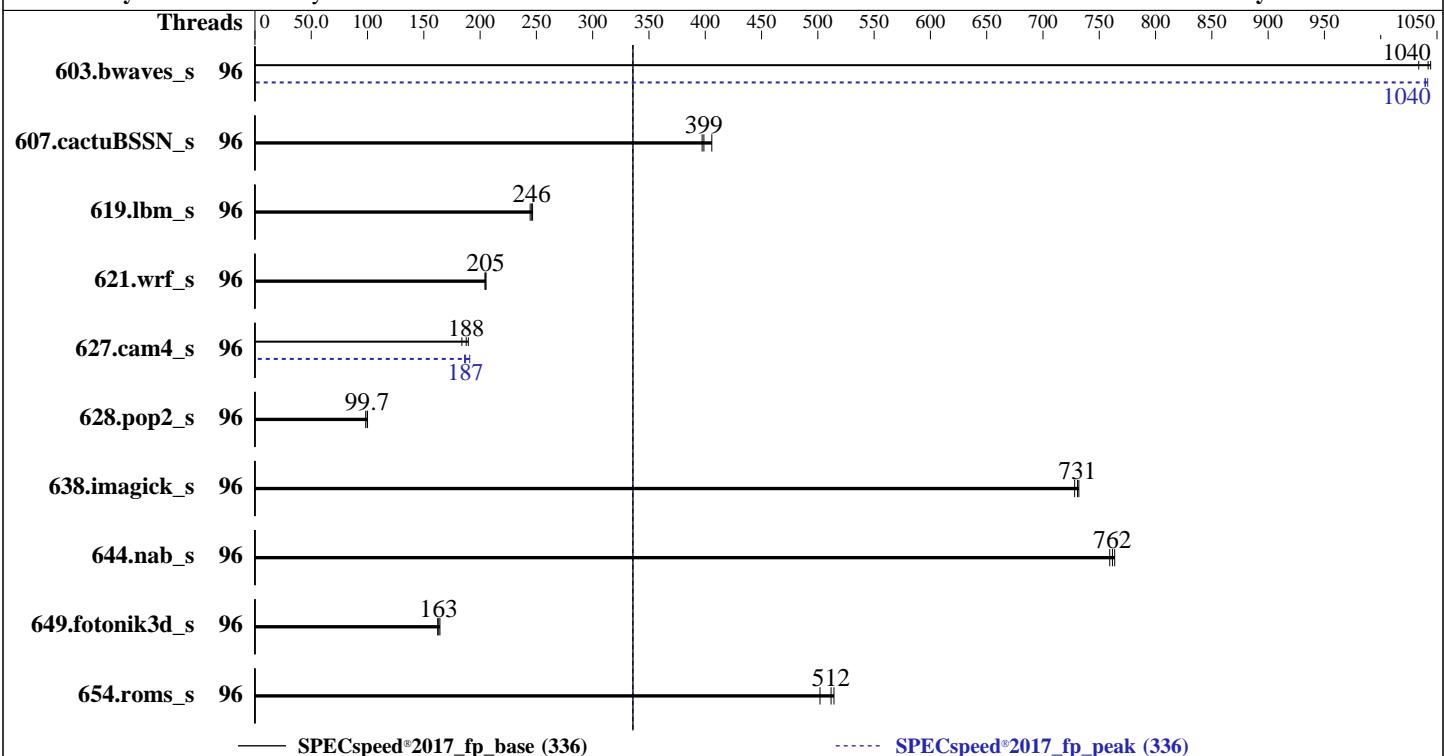

— SPECSpeed®2017\_fp\_base (336)

----- SPECSpeed®2017\_fp\_peak (336)

### Hardware

CPU Name: Intel Xeon Platinum 8468H  
 Max MHz: 3800  
 Nominal: 2100  
 Enabled: 96 cores, 2 chips  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version 5.1.1b released Mar-2023  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Platinum 8468H, 2.10GHz)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Threads
603.bwaves_s	96	57.1	1030	<b>56.6</b>	<b>1040</b>	56.5	1040	96	56.8	1040	<b>56.8</b>	<b>1040</b>	56.6	1040
607.cactuBSSN_s	96	42.0	397	<b>41.8</b>	<b>399</b>	41.1	406	96	42.0	397	<b>41.8</b>	<b>399</b>	41.1	406
619.lbm_s	96	21.4	244	<b>21.3</b>	<b>246</b>	21.2	247	96	21.4	244	<b>21.3</b>	<b>246</b>	21.2	247
621.wrf_s	96	64.5	205	64.7	204	<b>64.5</b>	<b>205</b>	96	64.5	205	64.7	204	<b>64.5</b>	<b>205</b>
627.cam4_s	96	46.8	190	<b>47.2</b>	<b>188</b>	48.2	184	96	46.5	191	47.6	186	<b>47.4</b>	<b>187</b>
628.pop2_s	96	<b>119</b>	<b>99.7</b>	119	100	121	98.4	96	<b>119</b>	<b>99.7</b>	119	100	121	98.4
638.imagick_s	96	19.8	728	19.7	732	<b>19.7</b>	<b>731</b>	96	19.8	728	19.7	732	<b>19.7</b>	<b>731</b>
644.nab_s	96	<b>22.9</b>	<b>762</b>	22.9	764	23.0	759	96	<b>22.9</b>	<b>762</b>	22.9	764	23.0	759
649.fotonik3d_s	96	<b>55.8</b>	<b>163</b>	55.5	164	56.2	162	96	<b>55.8</b>	<b>163</b>	55.5	164	56.2	162
654.roms_s	96	<b>30.8</b>	<b>512</b>	30.6	514	31.4	502	96	<b>30.8</b>	<b>512</b>	30.6	514	31.4	502
<b>SPECspeed®2017_fp_base = 336</b>														
<b>SPECspeed®2017_fp_peak = 336</b>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Intel Hyper-Threading Technology set to Disabled

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Platinum 8468H, 2.10GHz)

SPECSpeed®2017\_fp\_base = 336

SPECSpeed®2017\_fp\_peak = 336

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Platform Notes (Continued)

Sub NUMA Clustering set to Disabled

LLC Dead Line set to Disabled

ADDCS Sparsing set to Disabled

Processor C6 Report set to Enabled

UPI Link Enablement 1

UPI Power Management Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon May 29 04:27:55 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
04:27:55 up 3:21, 1 user, load average: 5.89, 5.69, 3.45  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttym1 - 01:07 3:19m 1.01s 0.13s -bash

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Platinum 8468H, 2.10GHz)

SPECSpeed®2017\_fp\_base = 336

SPECSpeed®2017\_fp\_peak = 336

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Platform Notes (Continued)

```
scheduling priority          (-e) 0
file size                  (blocks, -f) unlimited
pending signals             (-i) 4126917
max locked memory          (kbytes, -l) 64
max memory size            (kbytes, -m) unlimited
open files                 (-n) 1024
pipe size                  (512 bytes, -p) 8
POSIX message queues       (bytes, -q) 819200
real-time priority          (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes          (-u) 4126917
virtual memory              (kbytes, -v) unlimited
file locks                 (-x) unlimited
```

---

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=96
--tune all -o all --define drop_caches fpspeed
runcpu --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define
cores=96 --tune all --output_format all --define drop_caches --nopower --runmode speed --tune base:peak
--size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.024/templogs/preenv.fpspeed.024.0.log --lognum 024.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

---

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8468H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b000190
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 48
siblings        : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

---

```
7. lscpu
```

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Platinum 8468H, 2.10GHz)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

**CPU2017 License:** 9019

**Test Date:** May-2023

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Mar-2023

**Tested by:** Cisco Systems

**Software Availability:** Dec-2022

## Platform Notes (Continued)

```

Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 96
On-line CPU(s) list: 0-95
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8468H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 48
Socket(s): 2
Stepping: 8
CPU max MHz: 3800.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
       nonstop_tsc cpuid aperfmpf perf tsc_known_freq pnipclmulqdq dtes64 monitor
       ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrpr pdcm pcid dca sse4_1
       sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
       lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
       invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
       tpr_shadow vnni flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
       avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
       avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
       xsaveopt xsaved xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
       cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
       arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
       ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
       tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdir64b
       enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
       amx_tile flush_ll1d arch_capabilities

Virtualization: VT-x
L1d cache: 4.5 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 192 MiB (96 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-47
NUMA node1 CPU(s): 48-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

-----  
8. numactl --hardware

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Platinum 8468H, 2.10GHz)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

**CPU2017 License:** 9019

**Test Date:** May-2023

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Mar-2023

**Tested by:** Cisco Systems

**Software Availability:** Dec-2022

## Platform Notes (Continued)

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-47
node 0 size: 515698 MB
node 0 free: 513082 MB
node 1 cpus: 48-95
node 1 size: 516054 MB
node 1 free: 515487 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10
```

```
9. /proc/meminfo
MemTotal:      1056515124 kB
```

```
10. who -r
run-level 3 May 29 01:07
```

```
11. Systemd service manager version: systemd 249 (249.11+stable.124.g2bc0b2c447)
Default Target      Status
multi-user          running
```

```
12. Services, from systemctl list-unit-files
STATE            UNIT FILES
enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                  irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels
                  rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                  wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                  firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load
                  lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd
                  serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect         wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=155d53d1-2428-4816-a80b-8d0438d0586b
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Platinum 8468H,  
2.10GHz)

SPECSpeed®2017\_fp\_base = 336

SPECSpeed®2017\_fp\_peak = 336

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Platform Notes (Continued)

```
15. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space      2
    vm.compaction_proactiveness   20
    vm.dirty_background_bytes      0
    vm.dirty_background_ratio     10
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs    3000
    vm.dirty_ratio                 40
    vm.dirty_writeback_centisecs  500
    vm.dirtytime_expire_seconds   43200
    vm.extfrag_threshold          500
    vm.min_unmapped_ratio         1
    vm.nr_hugepages                0
    vm.nr_hugepages_mempolicy     0
    vm.nr_overcommit_hugepages    0
    vm.swappiness                  60
    vm.watermark_boost_factor    15000
    vm.watermark_scale_factor     10
    vm.zone_reclaim_mode          0
```

```
16. /sys/kernel/mm/transparent_hugepage
    defrag           [always] defer defer+madvise madvise never
    enabled          [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force
```

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                  1
    max_ptes_none          511
    max_ptes_shared        256
    max_ptes_swap          64
    pages_to_scan          4096
    scan_sleep_millisecs   10000
```

```
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP4
```

```
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2        btrfs  892G  9.3G  882G  2% /home
```

```
20. /sys/devices/virtual/dmi/id
    Vendor:      Cisco Systems Inc
    Product:     UCSX-210C-M7
    Serial:      FCH270978F5
```

```
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Platinum 8468H, 2.10GHz)

SPECSpeed®2017\_fp\_base = 336

SPECSpeed®2017\_fp\_peak = 336

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Platform Notes (Continued)

The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 0xAD00 HMCG94MEBRA109N 64 GB 2 rank 4800

-----  
22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: X210M7.5.1.1b.0.0308231534  
BIOS Date: 03/08/2023  
BIOS Revision: 5.29

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 607.cactubssn\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Platinum 8468H, 2.10GHz)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

**CPU2017 License:** 9019

**Test Date:** May-2023

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Mar-2023

**Tested by:** Cisco Systems

**Software Availability:** Dec-2022

## Base Compiler Invocation (Continued)

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Platinum 8468H, 2.10GHz)

**SPECSpeed®2017\_fp\_base = 336**

**SPECSpeed®2017\_fp\_peak = 336**

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Platinum 8468H,  
2.10GHz)

SPECSpeed®2017\_fp\_base = 336

SPECSpeed®2017\_fp\_peak = 336

CPU2017 License: 9019

Test Date: May-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids  
-Ofast -ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

```
649.fotonik3d_s: basepeak = yes
```

```
654.roms_s: basepeak = yes
```

Benchmarks using both Fortran and C:

```
621.wrf_s: basepeak = yes
```

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
628.pop2_s: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
607.cactuBSSN_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revH.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-29 07:27:55-0400.

Report generated on 2023-06-20 23:26:38 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-20.