



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-221H-TNR  
(X13DEM , Intel Xeon Max 9480)

**SPECspeed®2017\_int\_base = 13.4**

**SPECspeed®2017\_int\_peak = Not Run**

CPU2017 License: 001176


**Test Date:** Jul-2023

Test Sponsor: Supermicro

**Hardware Availability:** Jun-2023

Tested by: Supermico

**Software Availability:** Dec-2022

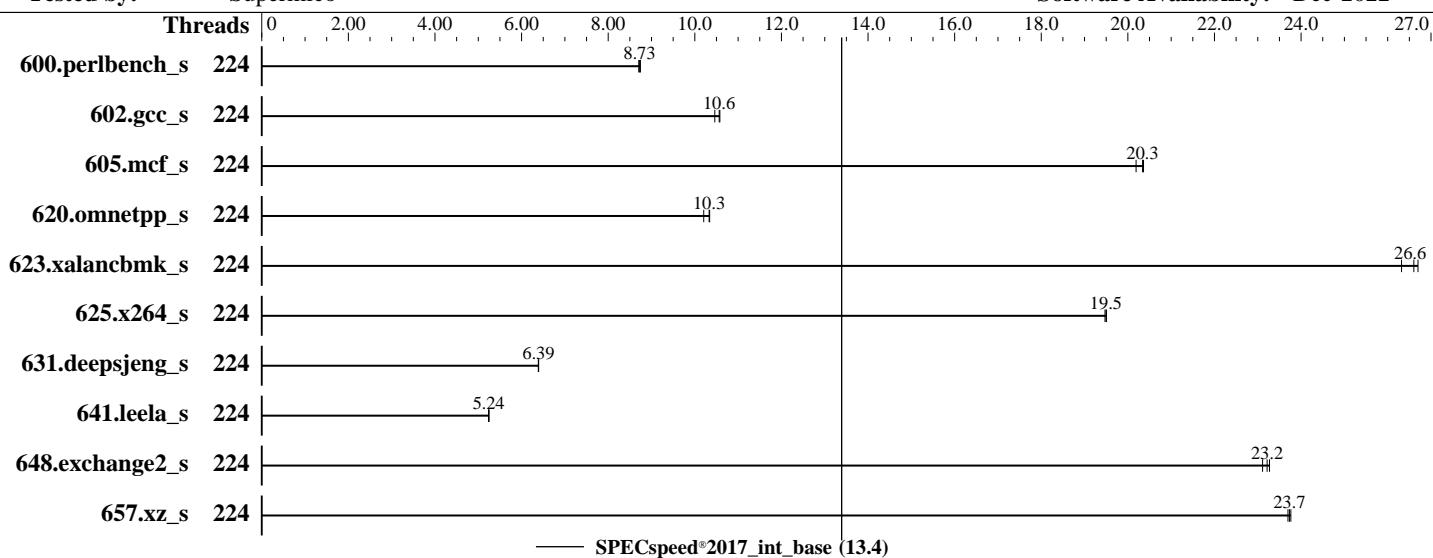

### Hardware

CPU Name: Intel Xeon Max 9480  
Max MHz: 3500  
Nominal: 1900  
Enabled: 112 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 112.5 MB I+D on chip per chip  
Other: None  
Memory: 1152 GB (16 x 64 GB 2Rx4 PC5-4800B-R + 2 x 64 GB HBM)  
Storage: 1 x 1.9 TB M.2 NVMe SSD  
Other: None

### OS:

SUSE Linux Enterprise Server 15 SP4

5.14.21-150400.22-default

Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
C/C++: Version 2023.0 of Intel C/C++ Compiler for Linux

### Parallel:

Yes

### Firmware:

Version 1.3 released Jun-2023

### File System:

xfs

### System State:

Run level 3 (multi-user)

### Base Pointers:

64-bit

### Peak Pointers:

Not Applicable

### Other:

jemalloc memory allocator V5.0.1

Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-221H-TNR  
(X13DEM , Intel Xeon Max 9480)

SPECspeed®2017\_int\_base = 13.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Jul-2023

Test Sponsor: Supermicro

Hardware Availability: Jun-2023

Tested by: Supermico

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	224	204	8.71	203	8.74	<b>203</b>	<b>8.73</b>							
602.gcc_s	224	381	10.5	<b>377</b>	<b>10.6</b>	376	10.6							
605.mcf_s	224	234	20.2	232	20.4	<b>232</b>	<b>20.3</b>							
620.omnetpp_s	224	160	10.2	<b>158</b>	<b>10.3</b>	158	10.3							
623.xalancbmk_s	224	53.8	26.3	53.1	26.7	<b>53.3</b>	<b>26.6</b>							
625.x264_s	224	90.6	19.5	90.4	19.5	<b>90.5</b>	<b>19.5</b>							
631.deepsjeng_s	224	224	6.39	<b>224</b>	<b>6.39</b>	224	6.39							
641.leela_s	224	326	5.24	<b>325</b>	<b>5.24</b>	325	5.25							
648.exchange2_s	224	<b>127</b>	<b>23.2</b>	126	23.3	127	23.1							
657.xz_s	224	261	23.7	260	23.8	<b>260</b>	<b>23.7</b>							

SPECspeed®2017\_int\_base = 13.4

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-221H-TNR  
(X13DEM , Intel Xeon Max 9480)

SPECspeed®2017\_int\_base = 13.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Jul-2023

Test Sponsor: Supermicro

Hardware Availability: Jun-2023

Tested by: Supermicro

Software Availability: Dec-2022

## General Notes (Continued)

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

### BIOS Settings:

Power Performance Tuning = BIOS Controls EPPB  
ENERGY\_PERF\_BIAS\_CFG mode = Performance  
DCU Streamer Prefetcher = Disable  
SNC = Enable SNC4 (4-clusters)  
LLC Dead Line Alloc = Disable

### IPMI Settings:

Fan Mode: Full Speed  
Enable Smart Power: OFF  
Using upgraded fans at 16.8K RPM

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on 102-241 Mon Jul 17 12:10:47 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-221H-TNR  
(X13DEM , Intel Xeon Max 9480)

SPECspeed®2017\_int\_base = 13.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Jul-2023

Test Sponsor: Supermicro

Hardware Availability: Jun-2023

Tested by: Supermico

Software Availability: Dec-2022

## Platform Notes (Continued)

```
1. uname -a
Linux 102-241 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
12:10:47 up 2 min, 1 user, load average: 1.88, 3.06, 1.40
USER      TTY      FROM             LOGIN@     IDLE    JCPU   PCPU WHAT
root      tty1          -           12:09    7.00s  1.09s  0.01s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4125080
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4125080
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=112 --tune base -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=112 --tune base --output_format all --define
  intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base --size
  refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.034/templogs/preenv.intspeed.034.0.log --lognum 034.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : Intel (R) Xeon (R) CPU Max 9480
vendor_id       : GenuineIntel
cpu family      : 6
model          : 143
stepping        : 8
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-221H-TNR  
(X13DEM , Intel Xeon Max 9480)

SPECspeed®2017\_int\_base = 13.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Jul-2023

Test Sponsor: Supermicro

Hardware Availability: Jun-2023

Tested by: Supermico

Software Availability: Dec-2022

## Platform Notes (Continued)

```
microcode      : 0x2c0001d1
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 56
siblings       : 112
2 physical ids (chips)
224 processors (hardware threads)
physical id 0: core ids 0-55
physical id 1: core ids 0-55
physical id 0: apicids 0-111
physical id 1: apicids 128-239
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 224
On-line CPU(s) list:    0-223
Vendor ID:              GenuineIntel
Model name:             Intel (R) Xeon (R) CPU Max 9480
CPU family:              6
Model:                  143
Thread(s) per core:     2
Core(s) per socket:     56
Socket(s):              2
Stepping:                8
Frequency boost:        enabled
CPU max MHz:            1901.0000
CPU min MHz:            800.0000
BogoMIPS:                3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
                        nonstop_tsc cpuid aperfmpfmon tsc_knwn_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                       lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                        invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospe waitpkg avx512_vbmi2 gfni vaes
                        vpcimulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
                        bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:          VT-x
L1d cache:                5.3 MiB (112 instances)
L1i cache:                3.5 MiB (112 instances)
L2 cache:                224 MiB (112 instances)
L3 cache:                225 MiB (2 instances)
NUMA node(s):              8
NUMA node0 CPU(s):        0-13,112-125
NUMA node1 CPU(s):        14-27,126-139
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-221H-TNR  
(X13DEM , Intel Xeon Max 9480)

SPECspeed®2017\_int\_base = 13.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Jul-2023

Test Sponsor: Supermicro

Hardware Availability: Jun-2023

Tested by: Supermicro

Software Availability: Dec-2022

## Platform Notes (Continued)

NUMA node2 CPU(s):	28-41,140-153
NUMA node3 CPU(s):	42-55,154-167
NUMA node4 CPU(s):	56-69,168-181
NUMA node5 CPU(s):	70-83,182-195
NUMA node6 CPU(s):	84-97,196-209
NUMA node7 CPU(s):	98-111,210-223
Vulnerability Itlb multihit:	Not affected
Vulnerability Llft:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	112.5M	225M	15	Unified	3	122880	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-13,112-125
node 0 size: 128544 MB
node 0 free: 126822 MB
node 1 cpus: 14-27,126-139
node 1 size: 129016 MB
node 1 free: 128574 MB
node 2 cpus: 28-41,140-153
node 2 size: 129016 MB
node 2 free: 128682 MB
node 3 cpus: 42-55,154-167
node 3 size: 129016 MB
node 3 free: 128653 MB
node 4 cpus: 56-69,168-181
node 4 size: 129016 MB
node 4 free: 128674 MB
node 5 cpus: 70-83,182-195
node 5 size: 129016 MB
node 5 free: 128327 MB
node 6 cpus: 84-97,196-209
node 6 size: 129016 MB
node 6 free: 128433 MB
node 7 cpus: 98-111,210-223
node 7 size: 128648 MB
node 7 free: 128300 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 17 17 17 26 26 26 26
1: 17 10 17 17 26 26 26 26
2: 17 17 10 17 26 26 26 26
3: 17 17 17 10 26 26 26 26
4: 26 26 26 26 10 17 17 17
5: 26 26 26 26 17 10 17 17
6: 26 26 26 26 17 17 10 17

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-221H-TNR  
(X13DEM , Intel Xeon Max 9480)

SPECspeed®2017\_int\_base = 13.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Jul-2023

Test Sponsor: Supermicro

Hardware Availability: Jun-2023

Tested by: Supermico

Software Availability: Dec-2022

## Platform Notes (Continued)

7: 26 26 26 26 17 17 17 10

9. /proc/meminfo

MemTotal: 1056045304 kB

10. who -r

run-level 3 Jul 17 12:08

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status  
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT LOAD ACTIVE SUB DESCRIPTION  
\* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nsqd nvmefc-boot-connections postfix purge-kernels rollback rsyslog sep5 smartd sshd wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny systemd-remount-fs
enabled-runtime	accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init iscsiuio issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb nvmf-autoconnect ostree-remount rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 upower
disabled	wickedd
indirect	wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default

root=UUID=2b95edbfa8ba-4a27-b211-c1f03f86601f

splash=silent

mitigations=auto

quiet

security=apparmor

crashkernel=321M,high

crashkernel=72M,low

15. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 800 MHz and 1.90 GHz.

The governor "ondemand" may decide which speed to use  
within this range.

boost state support:

Supported: yes

Active: yes

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-221H-TNR  
(X13DEM , Intel Xeon Max 9480)

SPECspeed®2017\_int\_base = 13.4

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Jul-2023

Test Sponsor: Supermicro

Hardware Availability: Jun-2023

Tested by: Supermico

Software Availability: Dec-2022

## Platform Notes (Continued)

```
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpge_pmd_size   2097152
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag              1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000
```

```
-----  
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----  
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs   1.1T  262G  865G  24% /home
```

```
-----  
21. /sys/devices/virtual/dmi/id
Vendor:        Supermicro
Product:       Super Server
Product Family: Family
Serial:        0123456789
```

```
-----  
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-221H-TNR  
(X13DEM , Intel Xeon Max 9480)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 13.4

SPECspeed®2017\_int\_peak = Not Run

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Intel 16 GB 1 rank 3200  
16x SK Hynix HMCG94MEBRA109N 64 GB 2 rank 4800

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.3  
BIOS Date: 06/01/2023  
BIOS Revision: 5.31

Each Intel Xeon CPU Max 9480 is configured with 64 GB of High Bandwidth Memory (HBM) in-package. dmidecode is additionally reporting the capacity of the CPU in-package HBM stack as: '8x Intel 16 GB 1 rank 3200'

## Compiler Version Notes

===== | 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base) 657.xz\_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

===== | 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base) 641.leela\_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

===== | 648.exchange2\_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-221H-TNR  
(X13DEM , Intel Xeon Max 9480)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermico

SPECspeed®2017\_int\_base = 13.4

SPECspeed®2017\_int\_peak = Not Run

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-math-errno  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-fno-math-errno -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-math-errno  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fno-standard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.2023-05-23.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.2023-05-23.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-17 15:10:46-0400.

Report generated on 2024-01-29 18:00:34 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-01.