



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 402

FusionServer 2288H V7 (Intel Xeon Gold 5416S)

SPECrate®2017\_fp\_peak = 403

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

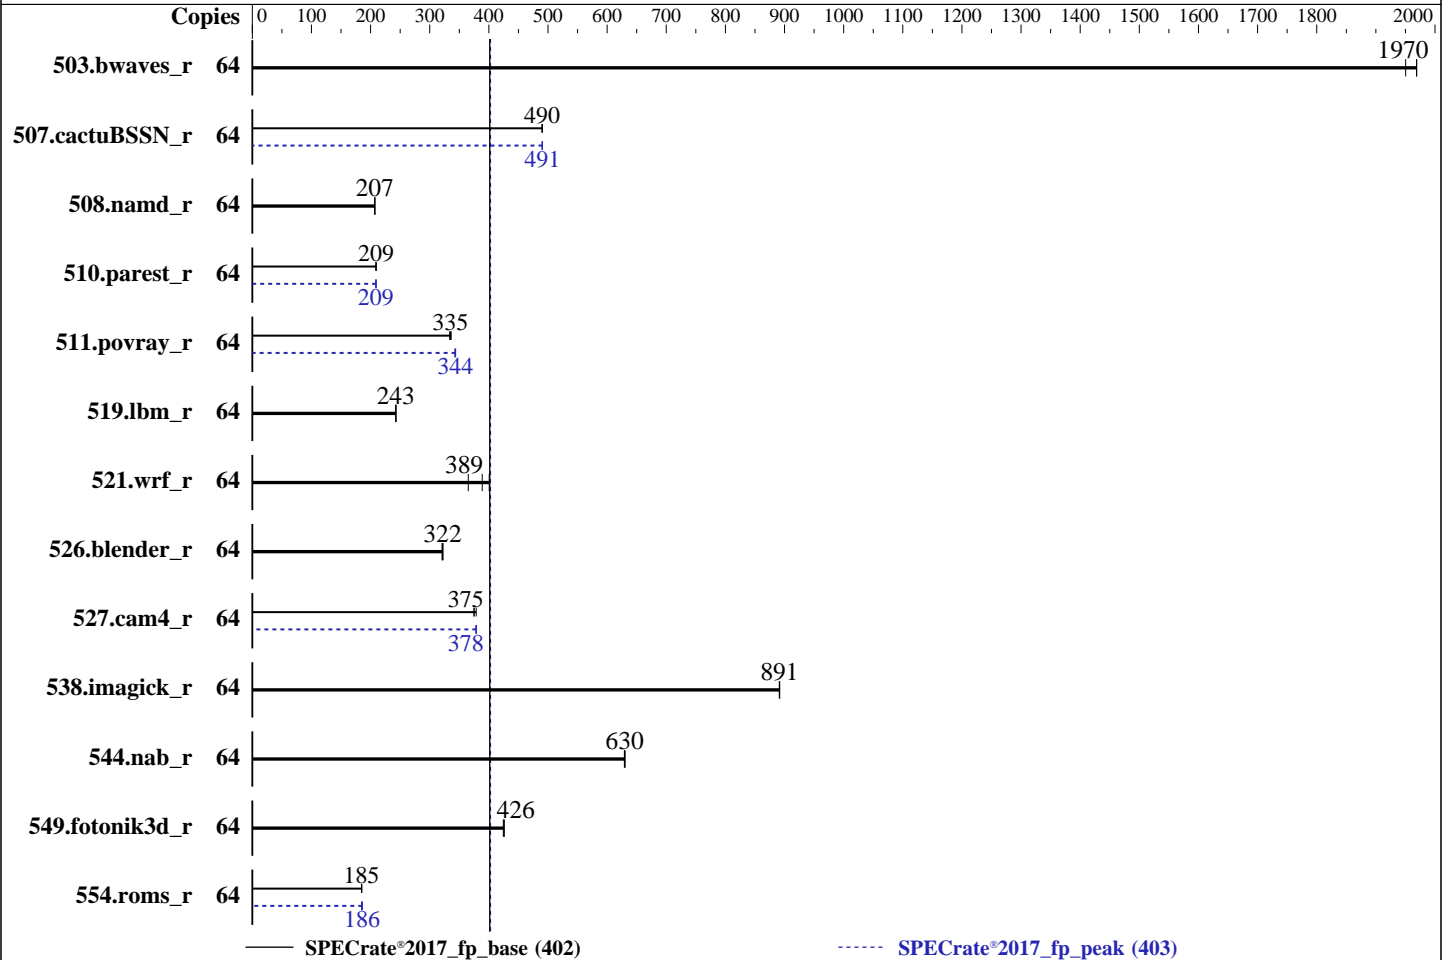

### Hardware

CPU Name: Intel Xeon Gold 5416S  
 Max MHz: 4000  
 Nominal: 2000  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)  
 Storage: 1 x 1920 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 2.00.55 Released Mar-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 402

FusionServer 2288H V7 (Intel Xeon Gold 5416S)

SPECrate®2017\_fp\_peak = 403

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jul-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	<b><u>326</u></b>	<b><u>1970</u></b>	329	1950	326	1970	64	<b><u>326</u></b>	<b><u>1970</u></b>	329	1950	326	1970
507.cactuBSSN_r	64	<b><u>165</u></b>	<b><u>490</u></b>	165	490	165	490	64	165	490	165	491	<b><u>165</u></b>	<b><u>491</u></b>
508.namd_r	64	294	207	293	207	<b><u>294</u></b>	<b><u>207</u></b>	64	294	207	293	207	<b><u>294</u></b>	<b><u>207</u></b>
510.parest_r	64	801	209	800	209	<b><u>800</u></b>	<b><u>209</u></b>	64	<b><u>801</u></b>	<b><u>209</u></b>	799	209	801	209
511.povray_r	64	448	334	444	336	<b><u>446</u></b>	<b><u>335</u></b>	64	436	342	435	344	<b><u>435</u></b>	<b><u>344</u></b>
519.lbm_r	64	278	243	<b><u>278</u></b>	<b><u>243</u></b>	278	243	64	278	243	<b><u>278</u></b>	<b><u>243</u></b>	278	243
521.wrf_r	64	358	401	<b><u>369</u></b>	<b><u>389</u></b>	393	365	64	358	401	<b><u>369</u></b>	<b><u>389</u></b>	393	365
526.blender_r	64	304	321	<b><u>303</u></b>	<b><u>322</u></b>	302	322	64	304	321	<b><u>303</u></b>	<b><u>322</u></b>	302	322
527.cam4_r	64	299	375	<b><u>298</u></b>	<b><u>375</u></b>	296	379	64	<b><u>296</u></b>	<b><u>378</u></b>	295	379	296	378
538.imagick_r	64	178	892	<b><u>179</u></b>	<b><u>891</u></b>	179	891	64	178	892	<b><u>179</u></b>	<b><u>891</u></b>	179	891
544.nab_r	64	<b><u>171</u></b>	<b><u>630</u></b>	171	629	171	630	64	<b><u>171</u></b>	<b><u>630</u></b>	171	629	171	630
549.fotonik3d_r	64	585	426	588	424	<b><u>586</u></b>	<b><u>426</u></b>	64	585	426	588	424	<b><u>586</u></b>	<b><u>426</u></b>
554.roms_r	64	<b><u>550</u></b>	<b><u>185</u></b>	551	185	549	185	64	550	185	<b><u>548</u></b>	<b><u>186</u></b>	547	186

SPECrate®2017\_fp\_base = **402**

SPECrate®2017\_fp\_peak = **403**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/spec2017-ic2023/lib/intel64:/home/spec2017-ic2023/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 402

FusionServer 2288H V7 (Intel Xeon Gold 5416S)

SPECrate®2017\_fp\_peak = 403

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /home/spec2017-ic2023/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Sat Jul 22 16:57:26 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux  
-----

2. w  
16:57:26 up 1 day, 10:08, 1 user, load average: 14.87, 47.57, 57.65  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 Fri06 34:00m 1.31s 0.09s -bash

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 402

### FusionServer 2288H V7 (Intel Xeon Gold 5416S)

## SPECrate®2017\_fp\_peak = 403

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2060225
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2060225
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 64 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define
smt-on --define cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches
--tune base,peak --iterations 3 -o all fprate
runcpu --define default-platform-flags --copies 64 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --iterations 3 --output_format all
--nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.147/temlogs/preenv.fprate.147.0.log --lognum 147.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/spec2017-ic2023
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 5416S
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 7
microcode      : 0x2b000111
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 16
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 128-159
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 402

## FusionServer 2288H V7 (Intel Xeon Gold 5416S)

## SPECrate®2017\_fp\_peak = 403

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 5416S
BIOS Model name:      Intel(R) Xeon(R) Gold 5416S
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):             2
Stepping:              7
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                      vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                      flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                      invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                      clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                      xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                      avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                      ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                      enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                      amx_tile flush_l1d arch_capabilities

Virtualization:        VT-x
L1d cache:             1.5 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              64 MiB (32 instances)
L3 cache:              60 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-7,32-39
NUMA node1 CPU(s):    8-15,40-47
NUMA node2 CPU(s):    16-23,48-55
NUMA node3 CPU(s):    24-31,56-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 402

FusionServer 2288H V7 (Intel Xeon Gold 5416S)

SPECrate®2017\_fp\_peak = 403

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-7,32-39
node 0 size: 128045 MB
node 0 free: 113901 MB
node 1 cpus: 8-15,40-47
node 1 size: 129020 MB
node 1 free: 118483 MB
node 2 cpus: 16-23,48-55
node 2 size: 129020 MB
node 2 free: 117236 MB
node 3 cpus: 24-31,56-63
node 3 size: 129009 MB
node 3 free: 115482 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527458440 kB

10. who -r

run-level 3 Jul 21 06:49

11. Systemd service manager version: systemd 250 (250-6.e19\_0)

```

Default Target Status
multi-user      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD    ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

13. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd sysstat
systemd-network-generator tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled       arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell kvm_stat
man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdm-rebuild
serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 402

FusionServer 2288H V7 (Intel Xeon Gold 5416S)

SPECrate®2017\_fp\_peak = 403

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

indirect            sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing            1
kernel.randomize_va_space       2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                   0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                   40
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio           1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    10
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag            always defer defer+madvice [madvice] never
enabled           [always] madvice never
hpage_pmd_size   2097152
shmem_enabled    always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs   60000
defrag                   1
max_ptes_none            511
max_ptes_shared          256
max_ptes_swap            64

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 402

FusionServer 2288H V7 (Intel Xeon Gold 5416S)

SPECrate®2017\_fp\_peak = 403

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
20. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)  
system-release Red Hat Enterprise Linux release 9.0 (Plow)  
-----

21. Disk information  
SPEC is set to: /home/spec2017-ic2023  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 1.7T 102G 1.6T 6% /home  
-----

22. /sys/devices/virtual/dmi/id  
Vendor: XFUSION  
Product: 2288H V7  
Product Family: Eagle Stream  
Serial: serial  
-----

23. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800, configured at 4400  
-----

24. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: XFUSION  
BIOS Version: 2.00.55  
BIOS Date: 03/07/2023  
BIOS Revision: 0.55  
-----

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 402

FusionServer 2288H V7 (Intel Xeon Gold 5416S)

SPECrate®2017\_fp\_peak = 403

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Compiler Version Notes (Continued)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 402

FusionServer 2288H V7 (Intel Xeon Gold 5416S)

SPECrate®2017\_fp\_peak = 403

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_fp\_base = 402

FusionServer 2288H V7 (Intel Xeon Gold 5416S)

SPECrate®2017\_fp\_peak = 403

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

**SPECrate®2017\_fp\_base = 402**

**FusionServer 2288H V7 (Intel Xeon Gold 5416S)**

**SPECrate®2017\_fp\_peak = 403**

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

**SPECrate®2017\_fp\_base = 402**

**FusionServer 2288H V7 (Intel Xeon Gold 5416S)**

**SPECrate®2017\_fp\_peak = 403**

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-22 16:57:25-0400.

Report generated on 2023-08-18 11:03:11 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-18.