



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017


Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

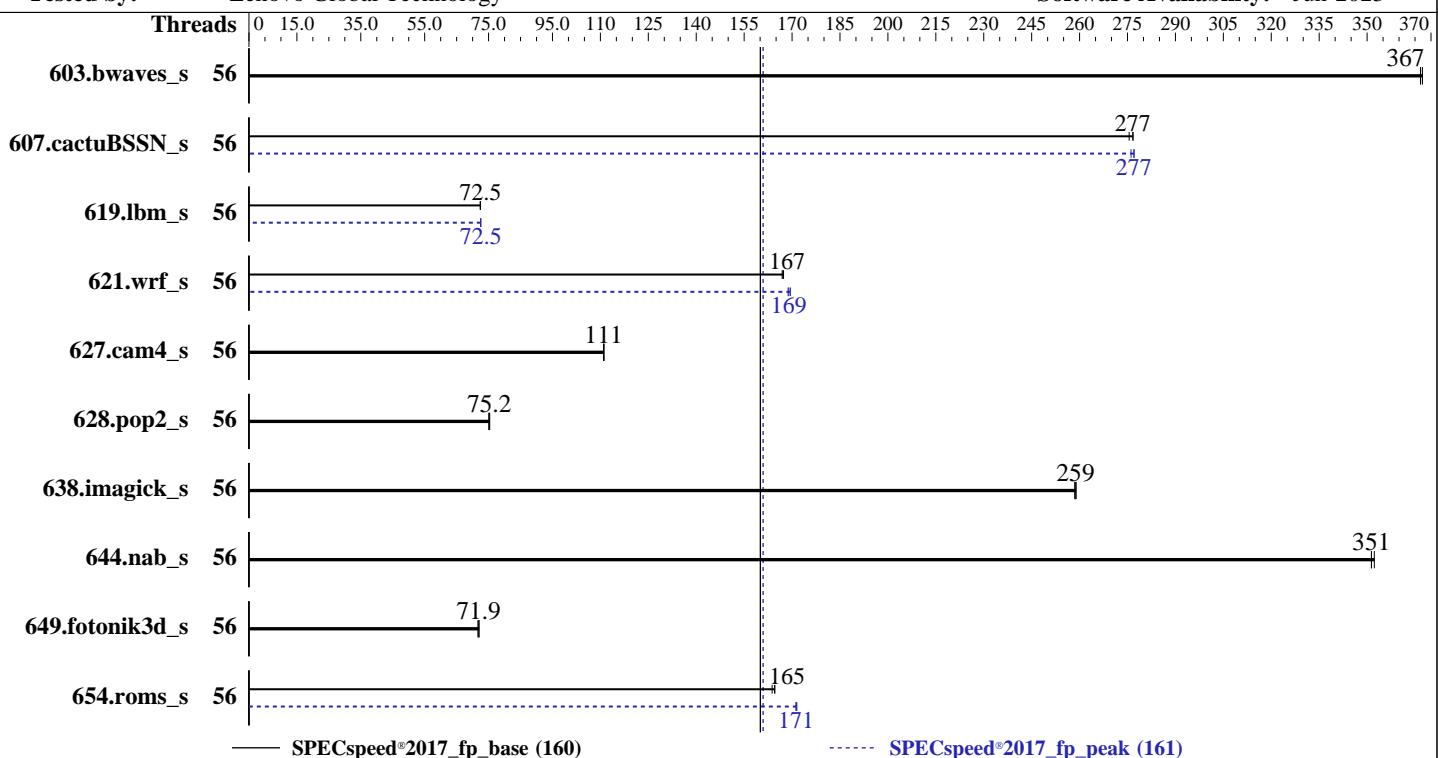

Hardware

CPU Name: AMD EPYC 7663P
Max MHz: 3500
Nominal: 2000
Enabled: 56 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 256 MB I+D on chip per chip,
32 MB shared / 7 cores
Other: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP5
Compiler: Kernel 5.14.21-150500.53-default
Parallel: C/C++/Fortran: Version 3.2.0 of AOCC
Firmware: Yes
File System: Lenovo BIOS Version CFE137D 7.10 released Jun-2023
System State: xfs
Base Pointers: Run level 3 (multi-user)
Peak Pointers: 64-bit
Other: 64-bit
Power Management: jemalloc: jemalloc memory allocator library v5.1.0
BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	161	367	<u>161</u>	<u>367</u>	161	367	56	161	367	<u>161</u>	<u>367</u>	161	367
607.cactuBSSN_s	56	60.5	276	60.2	277	<u>60.2</u>	<u>277</u>	56	60.4	276	60.2	277	<u>60.2</u>	<u>277</u>
619.lbm_s	56	72.3	72.5	<u>72.3</u>	<u>72.5</u>	72.4	72.4	56	72.3	72.5	<u>72.2</u>	<u>72.5</u>	72.2	72.6
621.wrf_s	56	79.0	167	<u>79.1</u>	<u>167</u>	79.2	167	56	<u>78.3</u>	<u>169</u>	78.4	169	78.0	169
627.cam4_s	56	<u>79.8</u>	<u>111</u>	79.7	111	79.9	111	56	<u>79.8</u>	<u>111</u>	79.7	111	79.9	111
628.pop2_s	56	158	75.1	<u>158</u>	<u>75.2</u>	158	75.4	56	158	75.1	<u>158</u>	<u>75.2</u>	158	75.4
638.imagick_s	56	55.8	258	55.7	259	<u>55.7</u>	<u>259</u>	56	55.8	258	55.7	259	<u>55.7</u>	<u>259</u>
644.nab_s	56	<u>49.7</u>	<u>351</u>	49.6	352	49.7	351	56	<u>49.7</u>	<u>351</u>	49.6	352	<u>49.7</u>	<u>351</u>
649.fotonik3d_s	56	127	72.0	<u>127</u>	<u>71.9</u>	127	71.7	56	127	72.0	<u>127</u>	<u>71.9</u>	127	71.7
654.roms_s	56	<u>95.7</u>	<u>165</u>	95.6	165	96.1	164	56	<u>91.9</u>	<u>171</u>	92.0	171	91.8	171

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-55"
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.9-amd-milanx-aocc320-A1/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017-1.1.9-amd-
    milanx-aocc320-A1/amd_speed_aocc320_milanx_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "56"
```

Environment variables set by runcpu during the 607.cactubSSN_s peak run:

```
GOMP_CPU_AFFINITY = "0-55"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0-55"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY = "0-55"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0-55"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

L1 Stream HW Prefetcher set to Disabled

SMT Mode set to Disabled

SOC P-states set to P0

```
Sysinfo program /home/cpu2017-1.1.9-amd-milanx-aocc320-A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Jul 18 09:47:51 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
09:47:51 up 6 min, 1 user, load average: 0.25, 0.09, 0.02
USER      TTY      FROM             LOGIN@     IDLE    JCPU    PCPU WHAT
root      ttys1          -           09:41    15.00s  1.29s  0.06s /bin/bash ./amd_speed_aocc320_milanx_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority       (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 1025950
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes        (-u) 1025950
virtual memory             (kbytes, -v) unlimited
file locks                 (-x) unlimited
```

```
5. sysinfo process ancestry
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./speccpu_milanX.sh
/bin/bash ./Run036-compliant-amd-speedfp.sh
python3 ./run_amd_speed_aocc320_milanx_A1.py
/bin/bash ./amd_speed_aocc320_milanx_A1.sh
runcpu --config amd_speed_aocc320_milanx_A1.cfg --tune all --reportable --iterations 3 fpsspeed
runcpu --configfile amd_speed_aocc320_milanx_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpsspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.037/templogs/preenv.fpsspeed.037.0.log --lognum 037.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-milanx-aocc320-A1

-----
6. /proc/cpuinfo
    model name      : AMD EPYC 7663P 56-Core Processor
    vendor_id       : AuthenticAMD
    cpu family     : 25
    model          : 1
    stepping        : 1
    microcode      : 0xa0011ce
    bugs            : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 2560 4K pages
    cpu cores      : 56
    siblings        : 56
    1 physical ids (chips)
    56 processors (hardware threads)
    physical id 0: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62
    physical id 0: apicids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
```

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          48 bits physical, 48 bits virtual
Byte Order:              Little Endian
CPU(s):                 56
On-line CPU(s) list:   0-55
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 7663P 56-Core Processor
CPU family:             25
Model:                  1
Thread(s) per core:    1
Core(s) per socket:    56
Socket(s):              1
Stepping:               1
Frequency boost:        enabled
CPU max MHz:            3541.0149
CPU min MHz:            1500.0000
BogoMIPS:                3992.70
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
                        xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

```
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core
perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single
hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2
invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsaves
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero
irperf xsaverptr rdpru wbnoinvd amd_ppin brs arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes
vpclmulqdq rdpid overflow_recov succor smca
```

Virtualization:

AMD-V

L1d cache: 1.8 MiB (56 instances)

L1i cache: 1.8 MiB (56 instances)

L2 cache: 28 MiB (56 instances)

L3 cache: 256 MiB (8 instances)

NUMA node(s): 1

NUMA node0 CPU(s): 0-55

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling, PBRSB-eIBRS Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.8M	8	Data	1	64	1	64
L1i	32K	1.8M	8	Instruction	1	64	1	64
L2	512K	28M	8	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-55

node 0 size: 256518 MB

node 0 free: 255540 MB

node distances:

node 0

0: 10

9. /proc/meminfo

MemTotal: 262674804 kB

10. who -r

run-level 3 Jul 18 09:41

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target Status
multi-user running

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

```
-----  
12. Services, from systemctl list-unit-files  
STATE          UNIT FILES  
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator  
                kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd  
                systemd-pstore wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime    systemd-remount-fs  
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
                firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievrd issue-add-ssh-keys  
                kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb rpcbind rpmconfigcheck  
                rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd  
                systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
                systemd-time-wait-sync systemd-timesyncd  
generated      ntp_sync  
indirect       wickedd  
  
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=52d7c982-f59a-45be-a5d3-ac137bfab34b  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
  
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 1.50 GHz and 2.00 GHz.  
    The governor "performance" may decide which speed to use  
    within this range.  
boost state support:  
    Supported: yes  
    Active: yes  
  
-----  
15. sysctl  
kernel.numa_balancing          0  
kernel.randomize_va_space       0  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes       0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 8  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  1  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode           1  
  
-----  
16. /sys/kernel/mm/transparent_hugepage
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

```
defrag      always defer defer+madvice [madvice] never
enabled     always [madvice] never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs 60000  
defrag 1  
max_ptes_none 511  
max_ptes_shared 256  
max_ptes_swap 64  
pages_to_scan 4096  
scan_sleep_millisecs 10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP5
```

```
-----  
19. Disk information  
SPEC is set to: /home/cpu2017-1.1.9-amd-milanx-aocc320-A1  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/md126p3 xfs 892G 25G 867G 3% /
```

```
-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Lenovo  
Product: ThinkSystem SR635 -[7Y98XXXXXX]-  
Product Family: ThinkSystem  
Serial: 0123456789
```

```
-----  
21. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
8x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200
```

```
-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: CFE137D  
BIOS Date: 06/28/2023  
BIOS Revision: 7.10
```

Compiler Version Notes

```
=====  
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
```

```
-----  
AMD clang version 13.0.0 (CLANG: A0CC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++, C, Fortran | 607.cactusBSSN_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_S: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapi -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapi -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsl-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSPEED®2017_fp_base = 160

SPECSPEED®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

```
638.imagick_s: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz,AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Peak Optimization Flags (Continued)

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635
(2.00 GHz, AMD EPYC 7663P)

SPECSpeed®2017_fp_base = 160

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-lcicm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-S.html>
<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-S.xml>
<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-17 21:47:50-0400.

Report generated on 2023-08-16 14:20:27 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.