



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

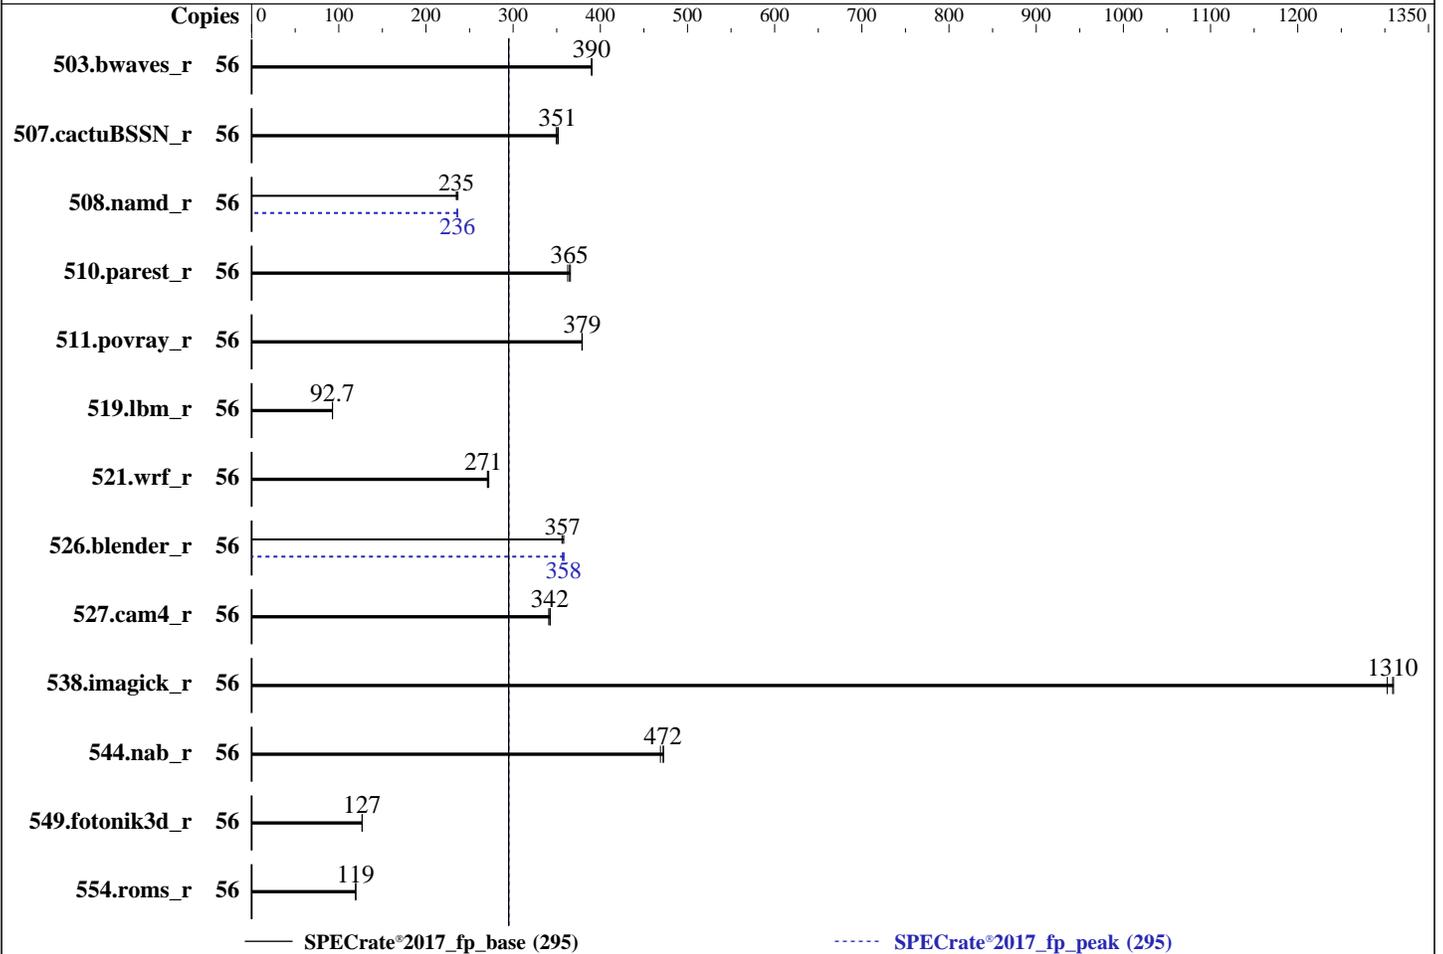

Hardware

CPU Name: AMD EPYC 7663P
 Max MHz: 3500
 Nominal: 2000
 Enabled: 56 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 7 cores
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP5
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
 Parallel: No
 Firmware: Lenovo BIOS Version CFE137D 7.10 released Jun-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Oct-2023
Software Availability: Jun-2023

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	56	1440	390	1440	390	1439	390	56	1440	390	1440	390	1439	390
507.cactuBSSN_r	56	202	351	203	349	201	352	56	202	351	203	349	201	352
508.namd_r	56	226	235	225	237	226	235	56	225	236	225	236	226	236
510.parest_r	56	404	363	401	366	402	365	56	404	363	401	366	402	365
511.povray_r	56	345	379	345	379	345	379	56	345	379	345	379	345	379
519.lbm_r	56	636	92.8	637	92.7	637	92.7	56	636	92.8	637	92.7	637	92.7
521.wrf_r	56	461	272	463	271	464	270	56	461	272	463	271	464	270
526.blender_r	56	238	358	240	356	239	357	56	239	356	238	358	238	358
527.cam4_r	56	287	341	286	343	286	342	56	287	341	286	343	286	342
538.imagick_r	56	106	1310	106	1310	107	1300	56	106	1310	106	1310	107	1300
544.nab_r	56	199	472	200	472	201	469	56	199	472	200	472	201	469
549.fotonik3d_r	56	1721	127	1722	127	1721	127	56	1721	127	1722	127	1721	127
554.roms_r	56	745	119	745	119	746	119	56	745	119	745	119	746	119

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-milanx-aocc320-A1/amd_rate_aocc320_milanx_A_lib/lib;/home/cpu2017-1.1.9-amd-m
ilanx-aocc320-A1/amd_rate_aocc320_milanx_A_lib/lib32:"
MALLOCONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

NUMA Nodes per Socket set to NPS4

L1 Stream HW Prefetcher set to Disabled

LLC as NUMA Node set to Enabled

Memory Interleave set to Disabled

SMT Mode set to Disabled

Sysinfo program /home/cpu2017-1.1.9-amd-milanx-aocc320-A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Mon Aug 7 15:53:30 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Oct-2023
Software Availability: Jun-2023

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w
15:53:30 up 2:00, 1 user, load average: 4.16, 33.13, 47.29
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 13:53 10.00s 1.22s 0.06s /bin/bash ./amd_rate_aocc320_milanx_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 1026717
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 1026717
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
/bin/bash ./Run026-compliant-amd-ratefp.sh
python3 ./run_amd_rate_aocc320_milanx_A1.py
/bin/bash ./amd_rate_aocc320_milanx_A1.sh
runcpu --config amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.111/templogs/preenv.fprate.111.0.log --lognum 111.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017-1.1.9-amd-milanx-aocc320-A1

6. /proc/cpuinfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Oct-2023
Software Availability: Jun-2023

Platform Notes (Continued)

```
model name      : AMD EPYC 7663P 56-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 1
stepping       : 1
microcode      : 0xa0011ce
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 2560 4K pages
cpu cores      : 56
siblings       : 56
1 physical ids (chips)
56 processors (hardware threads)
physical id 0: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62
physical id 0: apicids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:  0-55
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 7663P 56-Core Processor
CPU family:            25
Model:                 1
Thread(s) per core:   1
Core(s) per socket:   56
Socket(s):             1
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3541.0149
CPU min MHz:           1500.0000
BogoMIPS:              3992.40
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
                        xsave avx fl6c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
                        misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core
                        perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single
                        hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
                        invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero
                        irperf xsaveerptr rdpru wbnoinvd amd_ppin brs arat npt lbrv svm_lock
                        nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                        pfthreshold v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes
                        vpclmulqdq rdpid overflow_recov succor smca
Virtualization:        AMD-V
L1d cache:             1.8 MiB (56 instances)
L1i cache:             1.8 MiB (56 instances)
L2 cache:              28 MiB (56 instances)
L3 cache:              256 MiB (8 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 295

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

```

NUMA node1 CPU(s):          7-13
NUMA node2 CPU(s):          14-20
NUMA node3 CPU(s):          21-27
NUMA node4 CPU(s):          28-34
NUMA node5 CPU(s):          35-41
NUMA node6 CPU(s):          42-48
NUMA node7 CPU(s):          49-55
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                             filling, PBR SB-eIBRS Not affected
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.8M	8	Data	1	64	1	64
L1i	32K	1.8M	8	Instruction	1	64	1	64
L2	512K	28M	8	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-6
node 0 size: 30991 MB
node 0 free: 30649 MB
node 1 cpus: 7-13
node 1 size: 32252 MB
node 1 free: 31908 MB
node 2 cpus: 14-20
node 2 size: 32254 MB
node 2 free: 31965 MB
node 3 cpus: 21-27
node 3 size: 32253 MB
node 3 free: 31943 MB
node 4 cpus: 28-34
node 4 size: 32254 MB
node 4 free: 31989 MB
node 5 cpus: 35-41
node 5 size: 32253 MB
node 5 free: 31987 MB
node 6 cpus: 42-48
node 6 size: 32254 MB
node 6 free: 31964 MB
node 7 cpus: 49-55
node 7 size: 32196 MB
node 7 free: 31924 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  11  12  12  12  12  12  12
1:  11  10  12  12  12  12  12  12
2:  12  12  10  11  12  12  12  12

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Oct-2023
Software Availability: Jun-2023

Platform Notes (Continued)

```

3: 12 12 11 10 12 12 12 12
4: 12 12 12 12 10 11 12 12
5: 12 12 12 12 11 10 12 12
6: 12 12 12 12 12 12 10 11
7: 12 12 12 12 12 12 11 10

```

```

-----
9. /proc/meminfo
   MemTotal:      262870200 kB

```

```

-----
10. who -r
    run-level 3 Aug 7 13:53

```

```

-----
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
    Default Target Status
    multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
indirect wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=24d1e11b-665b-4592-9918-8c0c6c3eb850
splash=silent
quiet
security=apparmor
mitigations=auto

```

```

-----
14. cpupower frequency-info
    analyzing CPU 0:
      current policy: frequency should be within 1.50 GHz and 2.00 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.

    boost state support:
      Supported: yes
      Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Oct-2023
Software Availability: Jun-2023

Platform Notes (Continued)

```

vm.dirty_bytes          0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio          8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages         0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness           1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-milanx-aocc320-A1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   893G   26G  868G   3% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SR655 -[7Y00000000]-
Product Family: ThinkSystem
Serial:      0123456789

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
8x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Oct-2023
Software Availability: Jun-2023

Platform Notes (Continued)

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: CFE137D
BIOS Date: 06/28/2023
BIOS Revision: 7.10

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2023
Hardware Availability: Oct-2023
Software Availability: Jun-2023

Compiler Version Notes (Continued)

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 295

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Base Portability Flags (Continued)

```
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -Hz,1,0x1 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loop-fusion
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -convert-pow-exp-to-int=false -z muldefs -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

Peak Optimization Flags (Continued)

508.namd_r (continued):

```
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

```
526.blender_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -finline-aggressive
-mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
(2.00 GHz,AMD EPYC 7663P)

SPECrate®2017_fp_base = 295

SPECrate®2017_fp_peak = 295

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.html>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.xml>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-07 03:53:30-0400.

Report generated on 2023-08-30 09:42:09 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.