



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11


(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 450

SPECspeed®2017\_fp\_peak = 459

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Aug-2023  
Hardware Availability: Sep-2023  
Software Availability: Apr-2023

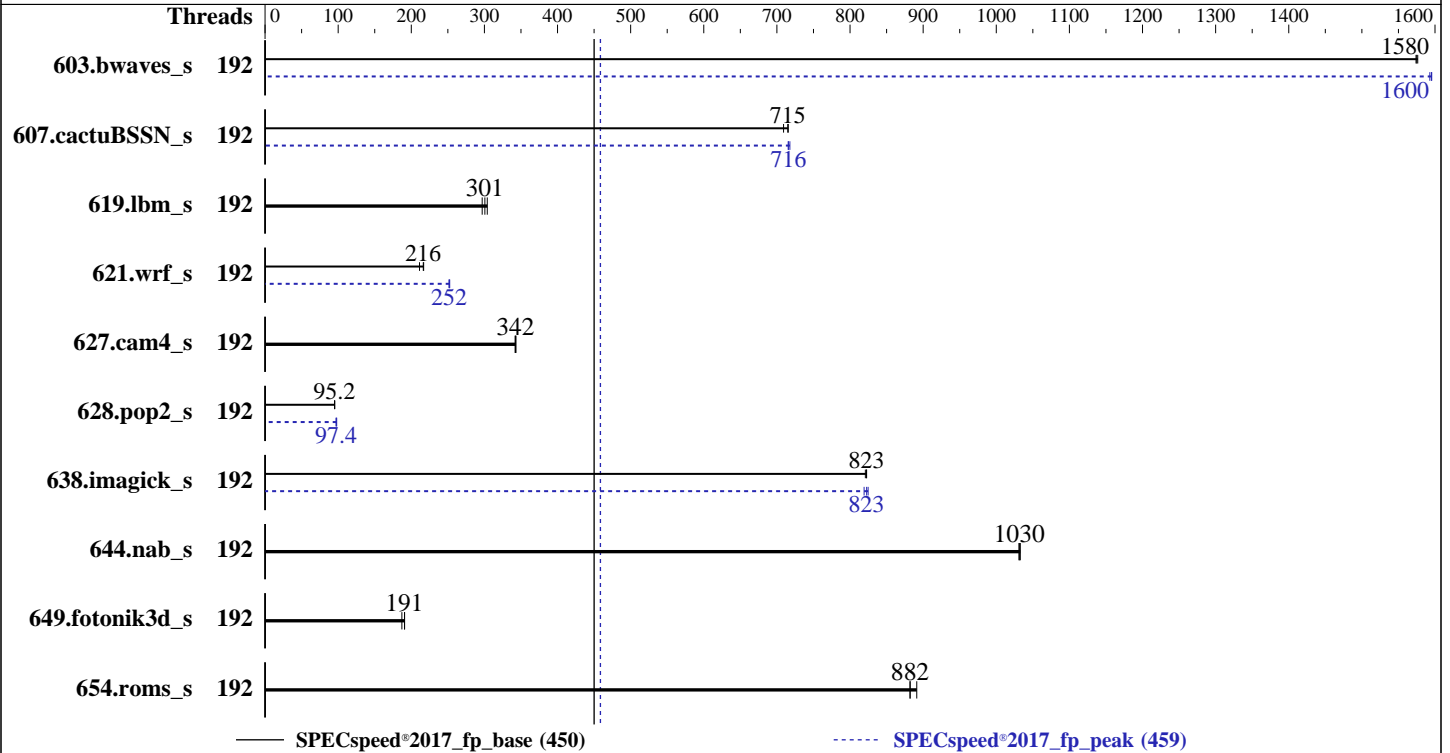

### Hardware

CPU Name: AMD EPYC 9684X  
 Max MHz: 3700  
 Nominal: 2550  
 Enabled: 192 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 1152 MB I+D on chip per chip,  
 96 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: HPE BIOS Version v1.40 07/12/2023 released Jul-2023  
 File System: btrfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECSpeed®2017\_fp\_base = 450

SPECSpeed®2017\_fp\_peak = 459

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	192	<b><u>37.5</u></b>	<b><u>1580</u></b>	37.5	1570	37.4	1580	192	37.0	1590	<b><u>37.0</u></b>	<b><u>1600</u></b>	37.0	1600
607.cactuBSSN_s	192	23.3	716	23.5	709	<b><u>23.3</u></b>	<b><u>715</u></b>	192	23.3	716	23.2	718	<b><u>23.3</u></b>	<b><u>716</u></b>
619.lbm_s	192	<b><u>17.4</u></b>	<b><u>301</u></b>	17.2	304	17.6	297	192	<b><u>17.4</u></b>	<b><u>301</u></b>	17.2	304	17.6	297
621.wrf_s	192	<b><u>61.1</u></b>	<b><u>216</u></b>	62.6	211	61.0	217	192	<b><u>52.5</u></b>	<b><u>252</u></b>	52.5	252	52.4	253
627.cam4_s	192	<b><u>25.9</u></b>	<b><u>342</u></b>	25.9	342	25.8	343	192	<b><u>25.9</u></b>	<b><u>342</u></b>	25.9	342	25.8	343
628.pop2_s	192	125	95.3	125	95.0	<b><u>125</u></b>	<b><u>95.2</u></b>	192	121	98.0	122	97.2	<b><u>122</u></b>	<b><u>97.4</u></b>
638.imagick_s	192	17.5	823	<b><u>17.5</u></b>	<b><u>823</u></b>	17.6	821	192	17.6	819	17.5	825	<b><u>17.5</u></b>	<b><u>823</u></b>
644.nab_s	192	16.9	1030	16.9	1030	<b><u>16.9</u></b>	<b><u>1030</u></b>	192	16.9	1030	16.9	1030	<b><u>16.9</u></b>	<b><u>1030</u></b>
649.fotonik3d_s	192	48.7	187	<b><u>47.8</u></b>	<b><u>191</u></b>	47.8	191	192	48.7	187	<b><u>47.8</u></b>	<b><u>191</u></b>	47.8	191
654.roms_s	192	17.9	882	17.7	891	<b><u>17.8</u></b>	<b><u>882</u></b>	192	17.9	882	17.7	891	<b><u>17.8</u></b>	<b><u>882</u></b>

SPECSpeed®2017\_fp\_base = **450**

SPECSpeed®2017\_fp\_peak = **459**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

To always enable THP for peak runs of:  
603.bwaves\_s, 607.cactuBSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

To disable THP for peak runs of 621.wrf\_s:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 450

SPECspeed®2017\_fp\_peak = 459

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Operating System Notes (Continued)

```
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-191"  
LD\_LIBRARY\_PATH = "/home/cpu2017/amd\_speed\_aocc400\_znver4\_A\_lib/lib:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "192"

Environment variables set by runcpu during the 603.bwaves\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-191"

Environment variables set by runcpu during the 607.cactuBSSN\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-191"

Environment variables set by runcpu during the 621.wrf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-191"

Environment variables set by runcpu during the 628.pop2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-191"

Environment variables set by runcpu during the 638.imagick\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-191"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration  
Workload Profile set to General Peak Frequency Compute  
Determinism Control set to Manual  
Performance Determinism set to Power Deterministic  
AMD SMT Option set to Disabled  
Memory Patrol Scrubbing set to Disabled  
Last-Level Cache (LLC) as NUMA Node set to Enabled  
ACPI CST C2 Latency set to 18 microseconds

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

**(2.55 GHz, AMD EPYC 9684X)**

**SPECspeed®2017\_fp\_base = 450**

**SPECspeed®2017\_fp\_peak = 459**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Apr-2023

## Platform Notes (Continued)

Memory PStates set to Disabled  
 Thermal Configuration set to Maximum Cooling  
 Workload Profile set to Custom  
 Power Regulator set to OS Control Mode  
 The system ROM used for this result contains microcode version 0xa10123e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version Genoa-XPI 1.0.0.8

Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on localhost Fri Aug 4 09:43:09 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
09:43:09 up 8 min, 3 users, load average: 1.60, 1.55, 0.98
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      :        :              20May22    ?xdm?      2:42      0.03s    gdm-session-worker [pam/gdm-password]
root      :1       :1            20May22    ?xdm?      2:42      0.00s    /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
root      pts/1    172.16.0.100  20May22    29.00s     1.17s     0.10s    /bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 450

SPECspeed®2017\_fp\_peak = 459

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Platform Notes (Continued)

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 3094513
max locked memory      (kbytes, -l) 2097152
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 3094513
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/1
-bash
python3 ./run_fpspeed_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.021/templogs/preenv.fpspeed.021.0.log --lognum 021.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9684X 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 2
microcode      : 0xa10123e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores      : 96
siblings       : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 1: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 1: apicids
256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.37.2:

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

**(2.55 GHz, AMD EPYC 9684X)**

**SPECspeed®2017\_fp\_base = 450**

**SPECspeed®2017\_fp\_peak = 459**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       192
On-line CPU(s) list:         0-191
Vendor ID:                    AuthenticAMD
Model name:                   AMD EPYC 9684X 96-Core Processor
CPU family:                   25
Model:                        17
Thread(s) per core:          1
Core(s) per socket:          96
Socket(s):                    2
Stepping:                     2
Frequency boost:              enabled
CPU max MHz:                  2550.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     5092.35
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld

Virtualization:               AMD-V
L1d cache:                    6 MiB (192 instances)
L1i cache:                    6 MiB (192 instances)
L2 cache:                     192 MiB (192 instances)
L3 cache:                     2.3 GiB (24 instances)
NUMA node(s):                 24
NUMA node0 CPU(s):            0-7
NUMA node1 CPU(s):            8-15
NUMA node2 CPU(s):            16-23
NUMA node3 CPU(s):            24-31
NUMA node4 CPU(s):            32-39
NUMA node5 CPU(s):            40-47
NUMA node6 CPU(s):            48-55
NUMA node7 CPU(s):            56-63
NUMA node8 CPU(s):            64-71
NUMA node9 CPU(s):            72-79
NUMA node10 CPU(s):           80-87
NUMA node11 CPU(s):           88-95
NUMA node12 CPU(s):           96-103
NUMA node13 CPU(s):           104-111
NUMA node14 CPU(s):           112-119
NUMA node15 CPU(s):           120-127
NUMA node16 CPU(s):           128-135
NUMA node17 CPU(s):           136-143
NUMA node18 CPU(s):           144-151
NUMA node19 CPU(s):           152-159

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.55 GHz, AMD EPYC 9684X)

**SPECspeed®2017\_fp\_base = 450**

**SPECspeed®2017\_fp\_peak = 459**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Platform Notes (Continued)

```

NUMA node20 CPU(s):          160-167
NUMA node21 CPU(s):          168-175
NUMA node22 CPU(s):          176-183
NUMA node23 CPU(s):          184-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                              filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	96M	2.3G	16	Unified	3	98304	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 24 nodes (0-23)
node 0 cpus: 0-7
node 0 size: 31943 MB
node 0 free: 31314 MB
node 1 cpus: 8-15
node 1 size: 32253 MB
node 1 free: 31836 MB
node 2 cpus: 16-23
node 2 size: 32253 MB
node 2 free: 32044 MB
node 3 cpus: 24-31
node 3 size: 32253 MB
node 3 free: 32019 MB
node 4 cpus: 32-39
node 4 size: 32253 MB
node 4 free: 32151 MB
node 5 cpus: 40-47
node 5 size: 32253 MB
node 5 free: 32183 MB
node 6 cpus: 48-55
node 6 size: 32253 MB
node 6 free: 32099 MB
node 7 cpus: 56-63
node 7 size: 32219 MB
node 7 free: 32139 MB
node 8 cpus: 64-71
node 8 size: 32253 MB
node 8 free: 32186 MB
node 9 cpus: 72-79
node 9 size: 32253 MB
node 9 free: 32177 MB
node 10 cpus: 80-87
node 10 size: 32253 MB
node 10 free: 32186 MB
node 11 cpus: 88-95

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

**(2.55 GHz, AMD EPYC 9684X)**

**SPECspeed®2017\_fp\_base = 450**

**SPECspeed®2017\_fp\_peak = 459**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Platform Notes (Continued)

```

node 11 size: 32253 MB
node 11 free: 32200 MB
node 12 cpus: 96-103
node 12 size: 32253 MB
node 12 free: 32029 MB
node 13 cpus: 104-111
node 13 size: 32253 MB
node 13 free: 32157 MB
node 14 cpus: 112-119
node 14 size: 32253 MB
node 14 free: 32160 MB
node 15 cpus: 120-127
node 15 size: 32253 MB
node 15 free: 32160 MB
node 16 cpus: 128-135
node 16 size: 32253 MB
node 16 free: 32190 MB
node 17 cpus: 136-143
node 17 size: 32253 MB
node 17 free: 32174 MB
node 18 cpus: 144-151
node 18 size: 32253 MB
node 18 free: 32145 MB
node 19 cpus: 152-159
node 19 size: 32253 MB
node 19 free: 32163 MB
node 20 cpus: 160-167
node 20 size: 32159 MB
node 20 free: 32054 MB
node 21 cpus: 168-175
node 21 size: 32253 MB
node 21 free: 32171 MB
node 22 cpus: 176-183
node 22 size: 32253 MB
node 22 free: 32176 MB
node 23 cpus: 184-191
node 23 size: 32253 MB
node 23 free: 32113 MB
node distances:

```

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
0:	10	11	11	11	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32	32	32	32	32
1:	11	10	11	11	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32	32	32	32	32
2:	11	11	10	11	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32	32	32	32	32
3:	11	11	11	10	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32	32	32	32	32
4:	11	11	11	11	10	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32	32	32	32	32
5:	11	11	11	11	11	10	11	11	11	11	11	11	32	32	32	32	32	32	32	32	32	32	32	32
6:	11	11	11	11	11	11	10	11	11	11	11	11	32	32	32	32	32	32	32	32	32	32	32	32
7:	11	11	11	11	11	11	11	10	11	11	11	11	32	32	32	32	32	32	32	32	32	32	32	32
8:	11	11	11	11	11	11	11	11	10	11	11	11	32	32	32	32	32	32	32	32	32	32	32	32
9:	11	11	11	11	11	11	11	11	11	10	11	11	32	32	32	32	32	32	32	32	32	32	32	32
10:	11	11	11	11	11	11	11	11	11	11	10	11	32	32	32	32	32	32	32	32	32	32	32	32
11:	11	11	11	11	11	11	11	11	11	11	10	32	32	32	32	32	32	32	32	32	32	32	32	32
12:	32	32	32	32	32	32	32	32	32	32	32	10	11	11	11	11	11	11	11	11	11	11	11	11
13:	32	32	32	32	32	32	32	32	32	32	32	11	10	11	11	11	11	11	11	11	11	11	11	11
14:	32	32	32	32	32	32	32	32	32	32	32	11	11	10	11	11	11	11	11	11	11	11	11	11
15:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	10	11	11	11	11	11	11	11	11	11
16:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	10	11	11	11	11	11	11	11	11
17:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	10	11	11	11	11	11	11	11
18:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	10	11	11	11	11	11	11
19:	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	10	11	11	11	11	11

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 450

SPECspeed®2017\_fp\_peak = 459

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Platform Notes (Continued)

20:	32	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	10	11	11	11
21:	32	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	11	10	11	11
22:	32	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	11	11	10	11
23:	32	32	32	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	11	11	11	10

9. /proc/meminfo  
MemTotal: 792220972 kB

10. who -r  
run-level 5 May 20 11:16

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid iscsiuiio issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nm-cloud-setup nmb openvpn@ ostree-remount pppoe pppoe-server rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2 upower wpa_supplicant@
indirect	pcscd saned@ wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=e710f57a-f290-46a0-a58f-3ef44ale3f08  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 1.50 GHz and 2.55 GHz.  
The governor "performance" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes

15. tuned-adm active  
Current active profile: latency-performance

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.55 GHz, AMD EPYC 9684X)

**SPECspeed®2017\_fp\_base = 450**

**SPECspeed®2017\_fp\_peak = 459**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Apr-2023

## Platform Notes (Continued)

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      3
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdc2 btrfs 445G 99G 347G 23% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      HPE
Product:     ProLiant DL385 Gen11
Product Family: ProLiant
Serial:      DL385G11-006

```

```

-----
22. dmidecode

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

**(2.55 GHz, AMD EPYC 9684X)**

**SPECspeed®2017\_fp\_base = 450**

**SPECspeed®2017\_fp\_peak = 459**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

9x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800  
15x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.40  
BIOS Date: 07/12/2023  
BIOS Revision: 1.40  
Firmware Revision: 1.40

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 450

SPECspeed®2017\_fp\_peak = 459

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

## Base Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 450

SPECspeed®2017\_fp\_peak = 459

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 450

SPECspeed®2017\_fp\_peak = 459

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -fstruct-layout=9 -mllvm -unroll-threshold=50

-fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECSpeed®2017\_fp\_base = 450

SPECSpeed®2017\_fp\_peak = 459

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2023  
**Hardware Availability:** Sep-2023  
**Software Availability:** Apr-2023

## Peak Optimization Flags (Continued)

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

627.cam4\_s: basepeak = yes

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 450

SPECspeed®2017\_fp\_peak = 459

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-04 00:13:08-0400.

Report generated on 2023-11-06 15:29:04 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-06.