



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

CPU2017 License: 006042


Test Date: Sep-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Jan-2023

Tested by: Tyrone Systems

Software Availability: May-2022

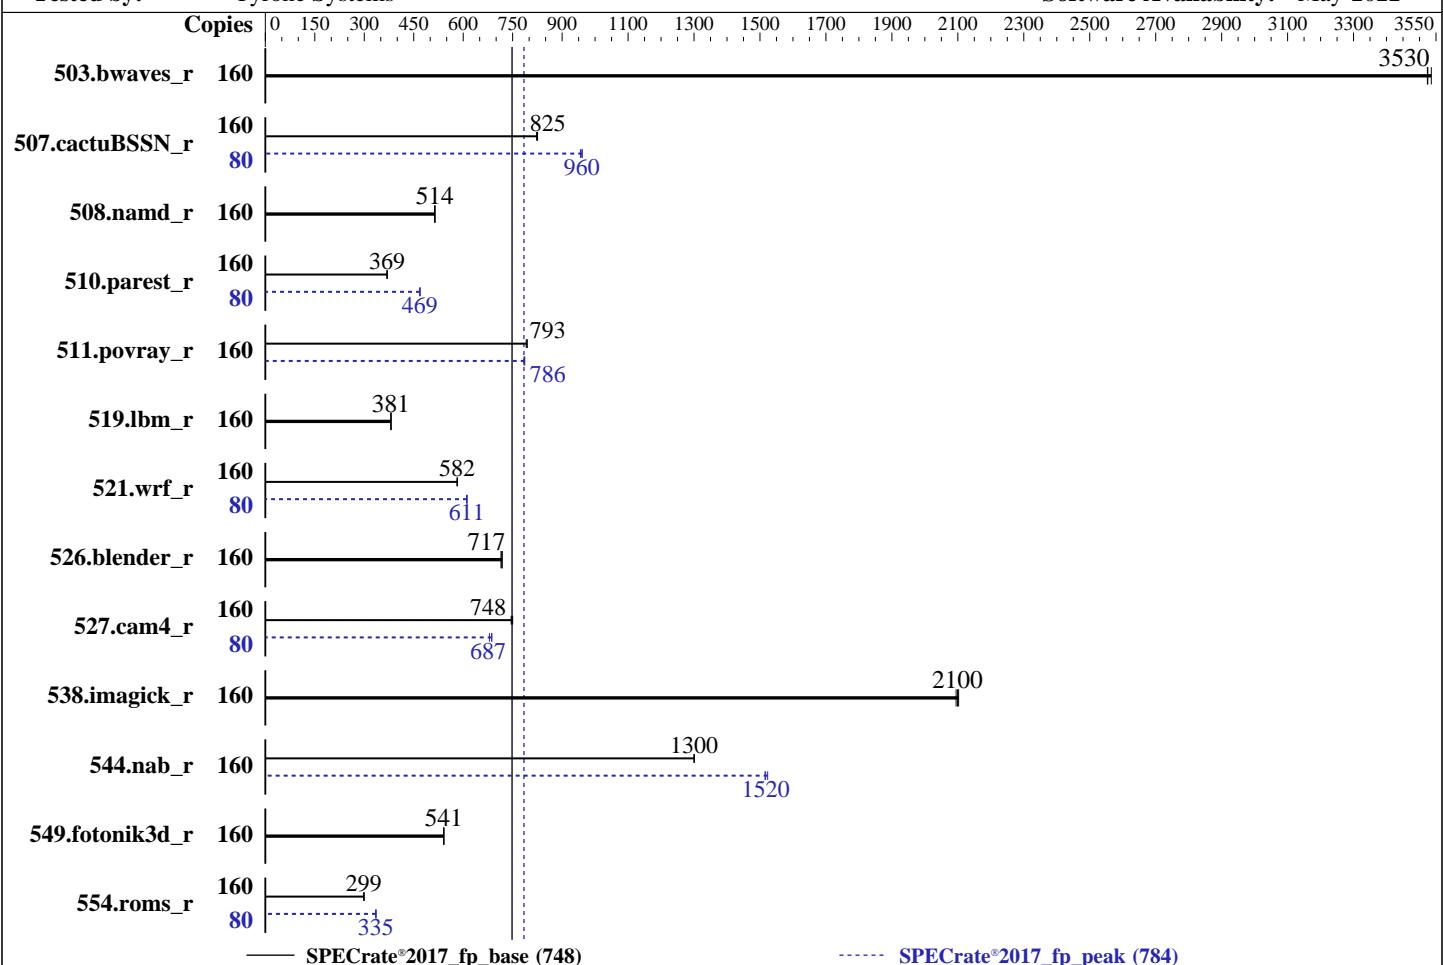

— SPECrate®2017_fp_base (748)

----- SPECrate®2017_fp_peak (784)

Hardware

CPU Name: Intel Xeon Platinum 8460Y+
Max MHz: 3700
Nominal: 2000
Enabled: 80 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 105 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 512 GB NVMe SSD
Other: None

OS:

Red Hat Enterprise Linux release 8.5 (Ootpa)

Compiler:

Kernel 4.18.0-348.el8.x86_64

C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;

Parallel:

No

Firmware:

Version 1.3 released Jun-2023

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

CPU2017 License: 006042

Test Date: Sep-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Jan-2023

Tested by: Tyrone Systems

Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	455	3520	455	3530	454	3540	160	455	3520	455	3530	454	3540
507.cactusBSSN_r	160	246	823	245	826	245	825	80	105	961	106	956	106	960
508.namd_r	160	296	514	296	513	295	515	160	296	514	296	513	295	515
510.parest_r	160	1133	369	1133	370	1135	369	80	447	469	447	469	446	469
511.povray_r	160	471	794	471	793	472	791	160	477	784	475	786	475	787
519.lbm_r	160	442	381	443	381	443	381	160	442	381	443	381	443	381
521.wrf_r	160	616	581	615	582	616	582	80	293	611	293	611	293	612
526.blender_r	160	341	715	339	718	340	717	160	341	715	339	718	340	717
527.cam4_r	160	374	748	375	745	373	750	80	204	687	204	687	206	680
538.imagick_r	160	189	2100	190	2100	190	2090	160	189	2100	190	2100	190	2090
544.nab_r	160	207	1300	207	1300	207	1300	160	177	1520	178	1520	177	1520
549.fotonik3d_r	160	1152	541	1152	541	1153	541	160	1152	541	1152	541	1153	541
554.roms_r	160	851	299	849	299	851	299	80	379	335	379	336	379	335

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

Test Date: Sep-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology = Custom
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable
Hyper-Threading = Enabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on Tyronespec Fri Sep 1 13:10:46 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 239 (239-51.el8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
-

1. uname -a
Linux Tyronespec 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86_64 x86_64 x86_64 GNU/Linux

2. w
13:10:46 up 7:26, 1 user, load average: 114.84, 148.76, 155.07

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	06:04	7:00m	1.09s	0.02s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c) 0
data seg size	(kbytes, -d) unlimited
scheduling priority	(-e) 0
file size	(blocks, -f) unlimited
pending signals	(-i) 4126783
max locked memory	(kbytes, -l) 64
max memory size	(kbytes, -m) unlimited
open files	(-n) 1024
pipe size	(512 bytes, -p) 8
POSIX message queues	(bytes, -q) 819200
real-time priority	(-r) 0
stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 4126783
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 17
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=160 -c
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=80 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=160 --configfile
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=80 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

model name	: Intel(R) Xeon(R) Platinum 8460Y+
vendor_id	: GenuineIntel
cpu family	: 6
model	: 143
stepping	: 8
microcode	: 0xb000461
bugs	: spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores	: 40
siblings	: 80
2 physical ids (chips)	
160 processors (hardware threads)	
physical id 0: core ids 0-39	
physical id 1: core ids 0-39	
physical id 0: apicids 0-79	
physical id 1: apicids 128-207	

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.32.1:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                160
On-line CPU(s) list:   0-159
Thread(s) per core:    2
Core(s) per socket:    40
Socket(s):              2
NUMA node(s):           2
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
CPU family:             6
Model:                 143
Model name:             Intel(R) Xeon(R) Platinum 8460Y+
BIOS Model name:        Intel(R) Xeon(R) Platinum 8460Y+
Stepping:               8
CPU MHz:                2001.000
CPU max MHz:            2001.0000
CPU min MHz:            800.0000
BogoMIPS:               4000.00
Virtualization:         VT-x
L1d cache:              48K
L1i cache:              32K
L2 cache:                2048K
L3 cache:                107520K
NUMA node0 CPU(s):      0-39,80-119
NUMA node1 CPU(s):      40-79,120-159
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                        acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                        arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpfperf
                        tsc_noreset_freq pn1 pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
                        f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                        invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust sgx bmi1 hle avx2 smep bmi2 erms
                        invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                        avx512cd sha_ni avx512bw avx512vl xsavopt xsavc xgetbv1 xsaves cqmq_llc cqmq_occup_llc
                        cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote
                        movdiri movdir64b enqcmd sgx_lc fsrm md_clear serialize tsxldtrk pconfig arch_lbr
                        avx512_fp16 flush_l1d arch_capabilities
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-39,80-119
node 0 size: 515680 MB
node 0 free: 480438 MB
node 1 cpus: 40-79,120-159
node 1 size: 516074 MB
node 1 free: 484486 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

```
node distances:
node    0      1
 0:   10    21
 1:   21    10

-----
9. /proc/meminfo
MemTotal:      1056516628 kB

-----
10. who -r
run-level 3 Sep 1 05:45

-----
11. Systemd service manager version: systemd 239 (239-51.el8)
Default Target  Status
multi-user      running

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon
                atd audited autovt@ avahi-daemon bluetooth chrony crond cups display-manager firewalld gdm
                getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned
                libstoragemgmt libvиртd loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd
                nis-domainname nvidia-hibernate nvidia-resume nvidia-suspend nvmefc-boot-connections
                ostree-remount qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark
                sep5 smartd sshd sssd syslog timedatectl tuned udisks2 vdo vgaughtd vmtoolsd
disabled       arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait console-getty cpupower cups-browsed debug-shell
                dnsmasq ebttables gssproxy httpd httpd@ initial-setup initial-setup-reconfiguration iprdump
                iprinit iprupdate iscsid iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update
                ndctl-monitor netcf-transaction nfs-blkmap nfs-convert nfs-server nftables numad nvidia-powerd
                nvmf-autoconnect oddjobd podman podman-auto-update podman-restart psacct radvd ras-mc-ctl
                rasdaemon rdisc rhcd rhsm-facts saslauthd serial-getty@ snmpd snmptrapd speech-dispatcherd
                sshd-keygen@ switcheroo-control systemd-nspawn@ systemd-resolved tcsd tog-pegasus upower
                virtinterfaced virtnetworkd virtnodedeved virtnwfilterd virtproxyd virtqemud virtsecretd
                virtstoraged wpa_supplicant
generated      SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap
                gcc-toolset-11-stap-server gcc-toolset-11-systemtap gcc-toolset-9-stap-server
                gcc-toolset-9-systemtap scripts startup
indirect       spice-vdagentd sssd-automount sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd
                virtlogd
masked         systemd-timedated

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-348.el8.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

-----
14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 2.00 GHz.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

Test Date: Sep-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	0
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release	/etc/*-version
os-release	Red Hat Enterprise Linux 8.5 (Ootpa)
redhat-release	Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release	Red Hat Enterprise Linux release 8.5 (Ootpa)

20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

itlb_multihit	Not affected
l1tf	Not affected
mds	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

Test Date: Sep-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

```
meltdown      Not affected
spec_store_bypass  Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1     Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2     Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbd          Not affected
tsx_async_abort  Not affected
```

For more information, see the Linux documentation on hardware vulnerabilities, for example
<https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

21. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	402G	370G	32G	93%	/home

22. /sys/devices/virtual/dmi/id

Vendor:	Tyrone Systems
Product:	Tyrone Camarero SDI200A3N-212
Product Family:	Family
Serial:	A497867X3106771

23. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R8GA0BB0-CQKZH 64 GB 2 rank 4800

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	American Megatrends International, LLC.
BIOS Version:	1.3
BIOS Date:	06/01/2023
BIOS Revision:	5.31

Compiler Version Notes

```
=====
```

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
=====
```

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
=====
```

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

CPU2017 License: 006042

Test Date: Sep-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Jan-2023

Tested by: Tyrone Systems

Software Availability: May-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactubssn_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

```
544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Peak Optimization Flags (Continued)

544.nab_r (continued):

```
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200C2G-48
(2.00 GHz, Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 748

SPECrate®2017_fp_peak = 784

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Sep-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-01 09:10:46-0400.

Report generated on 2023-10-11 12:28:26 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-10.