



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N, 2.00GHz)

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

CPU2017 License: 9019


Test Date: Sep-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

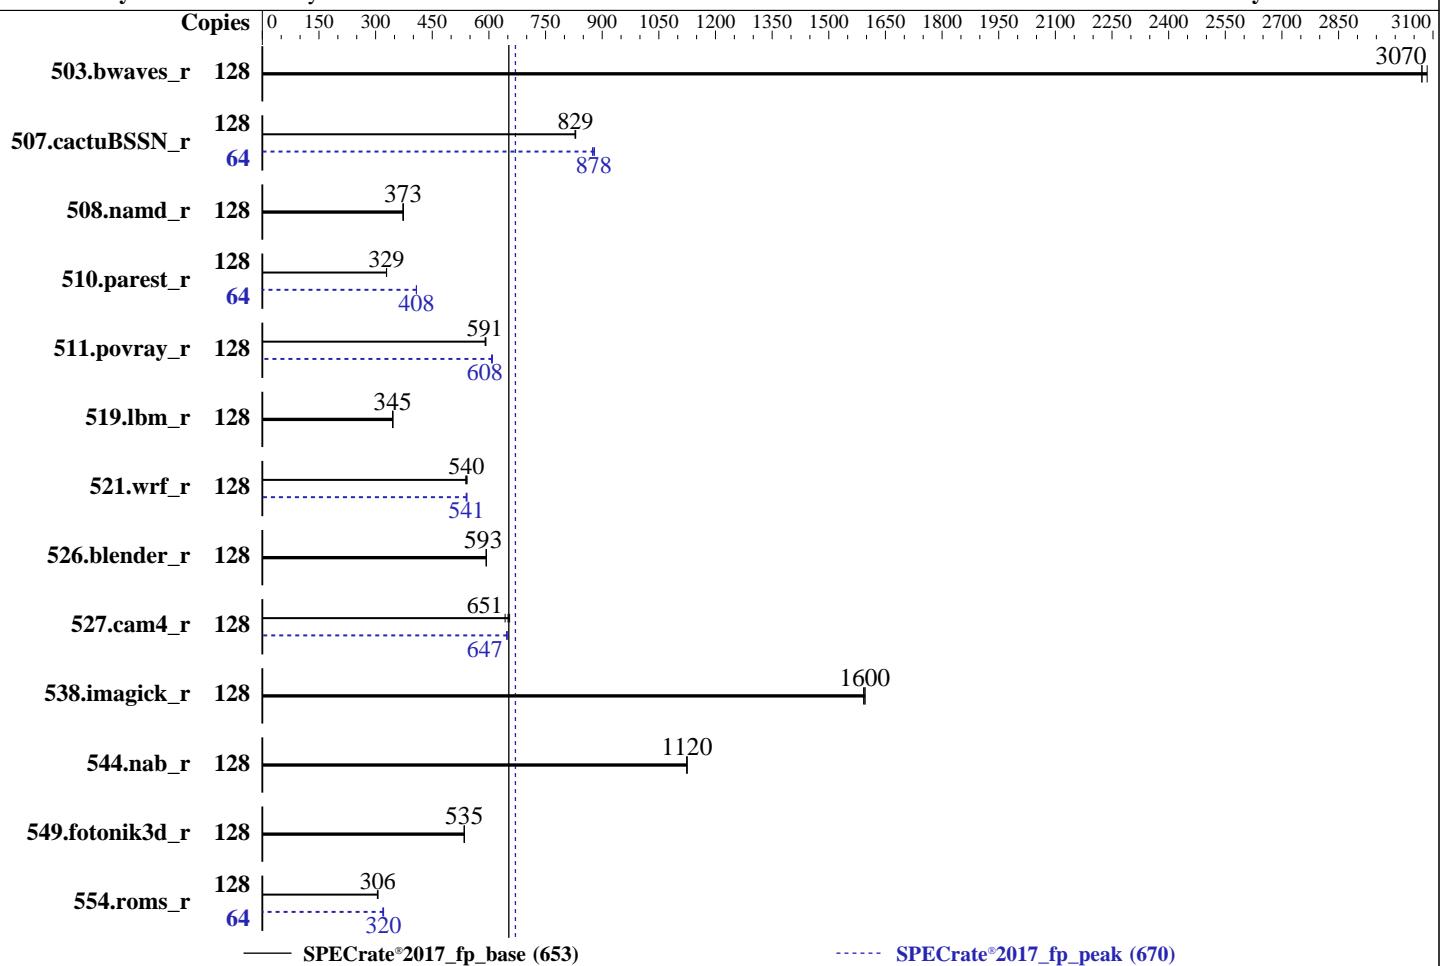

Hardware

CPU Name: Intel Xeon Gold 6438N
 Max MHz: 3600
 Nominal: 2000
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB M.2 SSD SATA
 Other: None

OS:

SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default

Compiler:
 C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;

Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;

No

Firmware: Version 4.3.1d released May-2023

File System: xfs

System State: Run level 3 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 64-bit

Other: jemalloc memory allocator V5.0.1

Power Management: BIOS set to prefer performance at the cost of additional power usage

Software



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N, 2.00GHz)

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

CPU2017 License: 9019

Test Date: Sep-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	416	3080	418	3070	418	3070	128	416	3080	418	3070	418	3070
507.cactuBSSN_r	128	196	828	195	830	195	829	64	<u>92.3</u>	878	92.1	880	92.7	874
508.namd_r	128	326	373	326	374	327	372	128	326	373	326	374	327	372
510.parest_r	128	1019	329	1017	329	1018	329	64	410	408	410	408	410	408
511.povray_r	128	505	592	507	590	506	591	128	492	608	491	609	492	607
519.lbm_r	128	390	346	391	345	391	345	128	390	346	391	345	391	345
521.wrf_r	128	532	539	529	542	531	540	128	529	542	531	540	530	541
526.blender_r	128	329	593	328	593	329	593	128	329	593	328	593	329	593
527.cam4_r	128	342	655	348	643	344	651	128	346	647	346	647	345	649
538.imagick_r	128	199	1600	200	1600	200	1590	128	199	1600	200	1600	200	1590
544.nab_r	128	192	1120	192	1120	192	1120	128	192	1120	192	1120	192	1120
549.fotonik3d_r	128	933	535	933	535	933	535	128	933	535	933	535	933	535
554.roms_r	128	667	305	665	306	665	306	64	317	321	319	319	317	320

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N, 2.00GHz)

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

CPU2017 License: 9019

Test Date: Sep-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetcher set to Enabled
DCU streamer Prefetch set to Enabled
Enhanced CPU Performance set to Auto
LLC Dead Line set to Disabled
ADDC Sparing set to Disabled
Processor C6 Report set to Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on srv04 Thu Sep 28 17:51:28 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux srv04 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N,
2.00GHz)

SPECCrate®2017_fp_base = 653

SPECCrate®2017_fp_peak = 670

CPU2017 License: 9019

Test Date: Sep-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
17:51:28 up 7 min, 1 user, load average: 0.08, 0.05, 0.03
USER      TTY      FROM          LOGIN@     IDLE     JCPU     PCPU WHAT
root      ttysl     -           17:51     7.00s   1.40s   0.17s -bash
```

3. Username

```
From environment variable $USER: root
```

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals          (-i) 4126809
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes       (-u) 4126809
virtual memory           (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --action=build --action validate --define default-platform-flags --define numcopies=128 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
  cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all
  fprate
runcpu --action build --action validate --define default-platform-flags --define numcopies=128 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
  cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all
  --output_format all --nopower --runmode rate --tune base:peak --size reframe fprate --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.304/templogs/preenv.fprate.304.0.log --lognum 304.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6438N
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b000461
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N, 2.00GHz)

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

CPU2017 License: 9019

Test Date: Sep-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Gold 6438N
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 8
CPU max MHz: 3600.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperf fmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
enqcmd fsrm md_clear serialize tsxlentrk pconfig arch_lbr avx512_fp16
amx_tile flush_l1d arch_capabilities
```

Virtualization:

```
VT-x
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 120 MiB (2 instances)
```

NUMA node(s): 4

```
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
```

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N,
2.00GHz)

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

CPU2017 License: 9019

Test Date: Sep-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Spectre v1:

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation: Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-15,64-79

node 0 size: 257688 MB

node 0 free: 255988 MB

node 1 cpus: 16-31,80-95

node 1 size: 258005 MB

node 1 free: 256926 MB

node 2 cpus: 32-47,96-111

node 2 size: 258039 MB

node 2 free: 257195 MB

node 3 cpus: 48-63,112-127

node 3 size: 257992 MB

node 3 free: 257135 MB

node distances:

node 0 1 2 3

0: 10 12 21 21

1: 12 10 21 21

2: 21 21 10 12

3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1056487872 kB

10. who -r

run-level 3 Sep 28 17:44

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled apparmor audited cron getty@ haveged irqbalance issue-generator kbdsettings klog
lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime systemd-remount-fs

disabled autofs blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once
haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load lunmask man-db-create
multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N,
2.00GHz)

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

CPU2017 License: 9019

Test Date: Sep-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect      wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
    root=UUID=82136e43-7b14-445e-80c8-a54855d5e2c7
    splash=silent
    mitigations=auto
    quiet
    security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.60 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag              1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N, 2.00GHz)

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

CPU2017 License: 9019

Test Date: Sep-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdb3 xfs 436G 14G 423G 4% /

20. /sys/devices/virtual/dmi/id
Vendor: Cisco Systems Inc
Product: UCSC-C240-M7SX
Serial: WZP26360KC7

21. dmidecode
Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x 0xCE00 M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Cisco Systems, Inc.
BIOS Version: C240M7.4.3.1d.0.0503232353
BIOS Date: 05/03/2023
BIOS Revision: 5.29

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N, 2.00GHz)

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====
C++, C, Fortran | 507.cactubSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N, 2.00GHz)

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

CPU2017 License: 9019

Test Date: Sep-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N,
2.00GHz)

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

CPU2017 License: 9019

Test Date: Sep-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N,
2.00GHz)

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

CPU2017 License: 9019

Test Date: Sep-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -fltoto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6438N,
2.00GHz)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECrate®2017_fp_base = 653

SPECrate®2017_fp_peak = 670

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revJ.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revJ.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-28 20:51:28-0400.

Report generated on 2023-10-25 10:39:19 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-24.