



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 397

SPECSpeed®2017_fp_peak = 399

CPU2017 License: 6573


Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Aug-2023

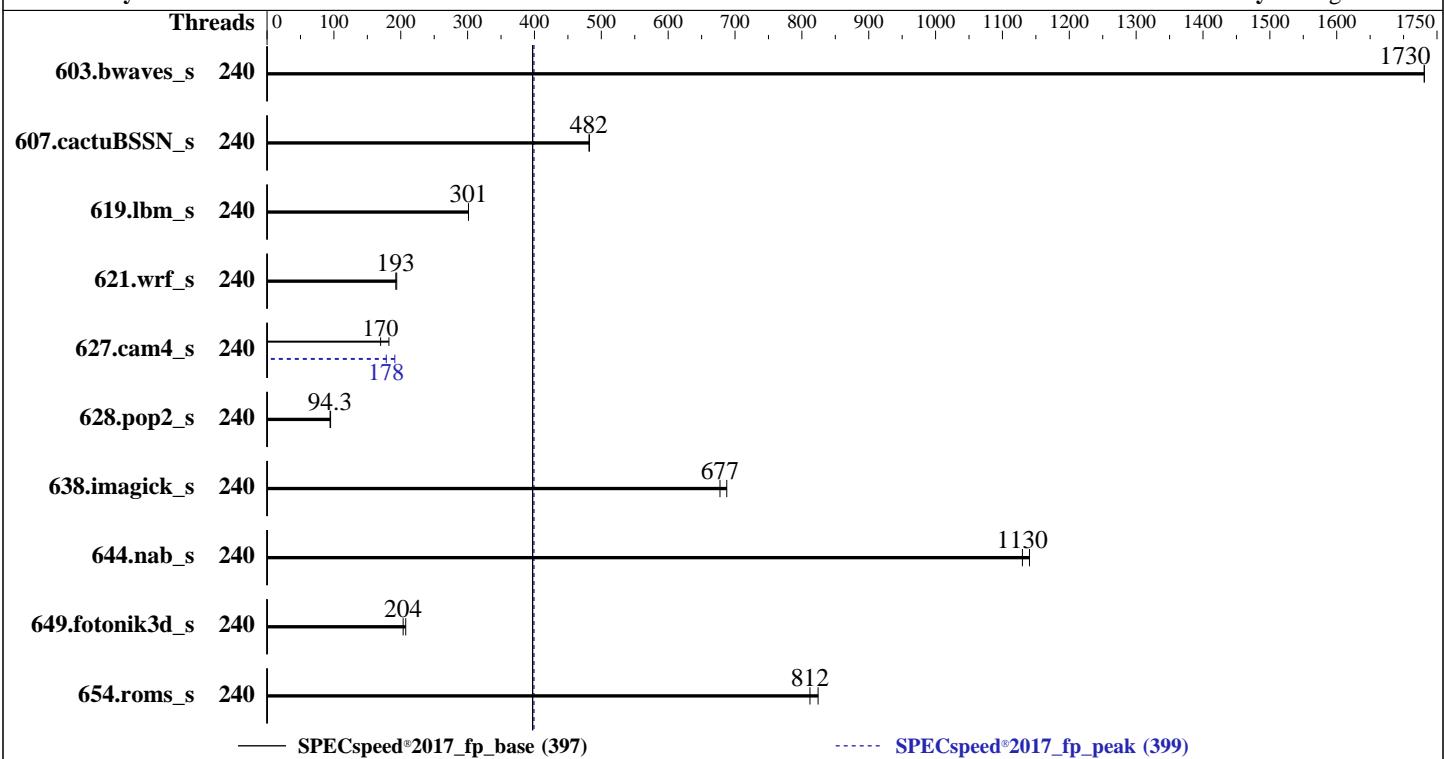

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 240 cores, 4 chips
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 130 GB on tmpfs
 Other: None

OS:

Red Hat Enterprise Linux 9.2 (Plow)

5.14.0-284.25.1.el9_2.x86_64

C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;

Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;

Yes

Firmware: Version 1.6.6 released Sep-2023

File System: tmpfs

System State: Run level 3 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 64-bit

Other: jemalloc memory allocator V5.0.1

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.

Software



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 397

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECSpeed®2017_fp_peak = 399

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Aug-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	240	34.1	1730	34.1	1730			240	34.1	1730	34.1	1730		
607.cactuBSSN_s	240	34.6	482	34.6	482			240	34.6	482	34.6	482		
619.lbm_s	240	17.4	301	17.4	301			240	17.4	301	17.4	301		
621.wrf_s	240	68.2	194	68.7	193			240	68.2	194	68.7	193		
627.cam4_s	240	52.2	170	48.6	182			240	49.7	178	46.4	191		
628.pop2_s	240	125	95.0	126	94.3			240	125	95.0	126	94.3		
638.imagick_s	240	21.0	688	21.3	677			240	21.0	688	21.3	677		
644.nab_s	240	15.3	1140	15.5	1130			240	15.3	1140	15.5	1130		
649.fotonik3d_s	240	44.8	204	43.9	207			240	44.8	204	43.9	207		
654.roms_s	240	19.1	824	19.4	812			240	19.1	824	19.4	812		

SPECSpeed®2017_fp_base = 397

SPECSpeed®2017_fp_peak = 399

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-ic2023.x/lib_2023.0/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.x/je5.0.1-64
"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 130 GB ramdisk created with the cmd: "mount -t tmpfs -o size=130G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECSpeed®2017_fp_base = 397

SPECSpeed®2017_fp_peak = 399

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Aug-2023

Platform Notes

BIOS settings:

```
    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled

    Logical Processor : Disabled
    DCU Streamer Prefetcher : Disabled
    Sub NUMA Cluster : 2-way Clustering
    Optimizer Mode : Enabled
    Opportunistic Snoop Broadcast : Disabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
    C1E : Disabled
    C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
    PCI ASPM L1 Link
    Power Management : Disabled
```

```
Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.x/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Oct 11 14:46:38 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-14.el9_2.3)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-284.25.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Thu Jul 20 09:11:28 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 397

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = 399

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Aug-2023

Platform Notes (Continued)

2. w
14:46:38 up 5 days, 5:01, 1 user, load average: 6.07, 6.00, 3.51
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 Fri10 2:23m 1.82s 0.00s /bin/bash ./dell-run-speccpu.sh speed --define
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1 --output_format
html,pdf,txt

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (i) 8252616
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 8252616
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.1 --output_format html,pdf,txt
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.1 --output_format html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base,peak -o all --define
drop_caches --define DL-4S=1 --define DL-BIOS-SNC=2 --define DL-LQC=1 --iterations 2 --define
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1 --output_format
html,pdf,txt fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base,peak --output_format all
--define drop_caches --define DL-4S=1 --define DL-BIOS-SNC=2 --define DL-LQC=1 --iterations 2 --define
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1 --output_format
html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv
--logfile \$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.x

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8490H

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 397

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECSpeed®2017_fp_peak = 399

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Aug-2023

Platform Notes (Continued)

```

vendor_id      : GenuineIntel
cpu family    : 6
model         : 143
stepping       : 6
microcode     : 0x2b0004d0
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss
cpu cores     : 60
siblings       : 60
4 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
0,362,364,366,368,370,372,374
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
8,490,492,494,496,498,500,502

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```

From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 240
On-line CPU(s) list:    0-239
Vendor ID:               GenuineIntel
BIOS Vendor ID:          Intel
Model name:              Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:         Intel(R) Xeon(R) Platinum 8490H
CPU family:              6
Model:                  143
Thread(s) per core:     1
Core(s) per socket:     60
Socket(s):              4
Stepping:                6
CPU max MHz:             3500.0000
CPU min MHz:             800.0000
BogoMIPS:                3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                           clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                           lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                           nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                           ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 397

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_peak = 399

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Aug-2023

Platform Notes (Continued)

```
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bm1 avx2 smep bm2
erms invpcid cqmqrdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqmqrdt_llc cqmqrdt_total cqmqrdt_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lll
arch_capabilities
```

Virtualization:

L1d cache:	11.3 MiB (240 instances)
L1i cache:	7.5 MiB (240 instances)
L2 cache:	480 MiB (240 instances)
L3 cache:	450 MiB (4 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120,128,136,144,152,160,168,1 76,184,192,200,208,216,224,232
NUMA node1 CPU(s):	4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140,148,156,164,172 ,180,188,196,204,212,220,228,236
NUMA node2 CPU(s):	1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137,145,153,161,169,1 77,185,193,201,209,217,225,233
NUMA node3 CPU(s):	5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,165,173 ,181,189,197,205,213,221,229,237
NUMA node4 CPU(s):	2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138,146,154,162,170 ,178,186,194,202,210,218,226,234
NUMA node5 CPU(s):	6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142,150,158,166,174 ,182,190,198,206,214,222,230,238
NUMA node6 CPU(s):	3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163,171 ,179,187,195,203,211,219,227,235
NUMA node7 CPU(s):	7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,167,175 ,183,191,199,207,215,223,231,239

Vulnerability Itlb multihit:

Not affected

Vulnerability L1tf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW

sequence

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	32K	7.5M	8	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	112.5M	450M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 397

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECSpeed®2017_fp_peak = 399

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Aug-2023

Platform Notes (Continued)

0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120,128,136,144,152,160,168,176,184,192,200,208,216,224,232
node 0 size: 256981 MB
node 0 free: 253967 MB
node 1 cpus:
4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140,148,156,164,172,180,188,196,204,212,220,228,236
node 1 size: 258041 MB
node 1 free: 254919 MB
node 2 cpus:
1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137,145,153,161,169,177,185,193,201,209,217,225,233
node 2 size: 258041 MB
node 2 free: 251888 MB
node 3 cpus:
5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,165,173,181,189,197,205,213,221,229,237
node 3 size: 258041 MB
node 3 free: 251643 MB
node 4 cpus:
2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138,146,154,162,170,178,186,194,202,210,218,226,234
node 4 size: 258041 MB
node 4 free: 251805 MB
node 5 cpus:
6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142,150,158,166,174,182,190,198,206,214,222,230,238
node 5 size: 258041 MB
node 5 free: 256890 MB
node 6 cpus:
3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163,171,179,187,195,203,211,219,227,235
node 6 size: 258001 MB
node 6 free: 253157 MB
node 7 cpus:
7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,167,175,183,191,199,207,215,223,231,239
node 7 size: 258027 MB
node 7 free: 257363 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 21 21 21 21 21 21
1: 12 10 21 21 21 21 21 21
2: 21 21 10 12 21 21 21 21
3: 21 21 12 10 21 21 21 21
4: 21 21 21 10 12 21 21 21
5: 21 21 21 12 10 21 21 21
6: 21 21 21 21 21 10 12 21
7: 21 21 21 21 21 21 12 10

9. /proc/meminfo
MemTotal: 2112734248 kB

10. who -r
run-level 3 Oct 6 09:45

11. Systemd service manager version: systemd 252 (252-14.el9_2.3)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd audited avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 397

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECSpeed®2017_fp_peak = 399

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Aug-2023

Platform Notes (Continued)

```
gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
systemd-network-generator udisks2 upower vgaauthd vmtoolsd
enabled-runtime
disabled
arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnf-system-upgrade dnsmasq iprdump iprinit ipruleupdate iscsid
iscsiuiu kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvmf-autoconnect
ostree-readonly-sysroot-migration podman podman-auto-update podman-clean-transient
podman-kube@ podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts
rpmdb-rebuild selinux-check-proper-disable serial-getty@ speech-dispatcherd sshd-keygen@
systemd-boot-check-no-failures systemd-boot-update systemd-pstore systemd-sysexit
wpa_supplicant
indirect
spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
systemd-sysupdate systemd-sysupdate-reboot
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.25.1.el9_2.x86_64  
root=/dev/mapper/rhel-root  
ro  
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 3.50 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor       10
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R860 (Intel Xeon Platinum 8490H)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECSpeed®2017_fp_base = 397

SPECSpeed®2017_fp_peak = 399

Test Date: Oct-2023

Hardware Availability: May-2023

Software Availability: Aug-2023

Platform Notes (Continued)

vm.zone_reclaim_mode

0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvise [madvise] never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)

19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.x
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 130G 5.4G 125G 5% /mnt/ramdisk

20. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R860
Product Family: PowerEdge
Serial: SLR8603

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
30x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
1x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
1x 00AD063200AD HMCG94MEBRA109N 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.6.6
BIOS Date: 09/20/2023
BIOS Revision: 1.6



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 397

SPECspeed®2017_fp_peak = 399

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Aug-2023

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactubssn_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 397

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECSpeed®2017_fp_peak = 399

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Aug-2023

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 397

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECSpeed®2017_fp_peak = 399

CPU2017 License: 6573

Test Date: Oct-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Aug-2023

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECSpeed®2017_fp_base = 397

SPECSpeed®2017_fp_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2023

Hardware Availability: May-2023

Software Availability: Aug-2023

Peak Optimization Flags (Continued)

627.cam4_s (continued):

```
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.html
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.xml
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-11 15:46:37-0400.

Report generated on 2023-11-21 20:33:09 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-21.