



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017


Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

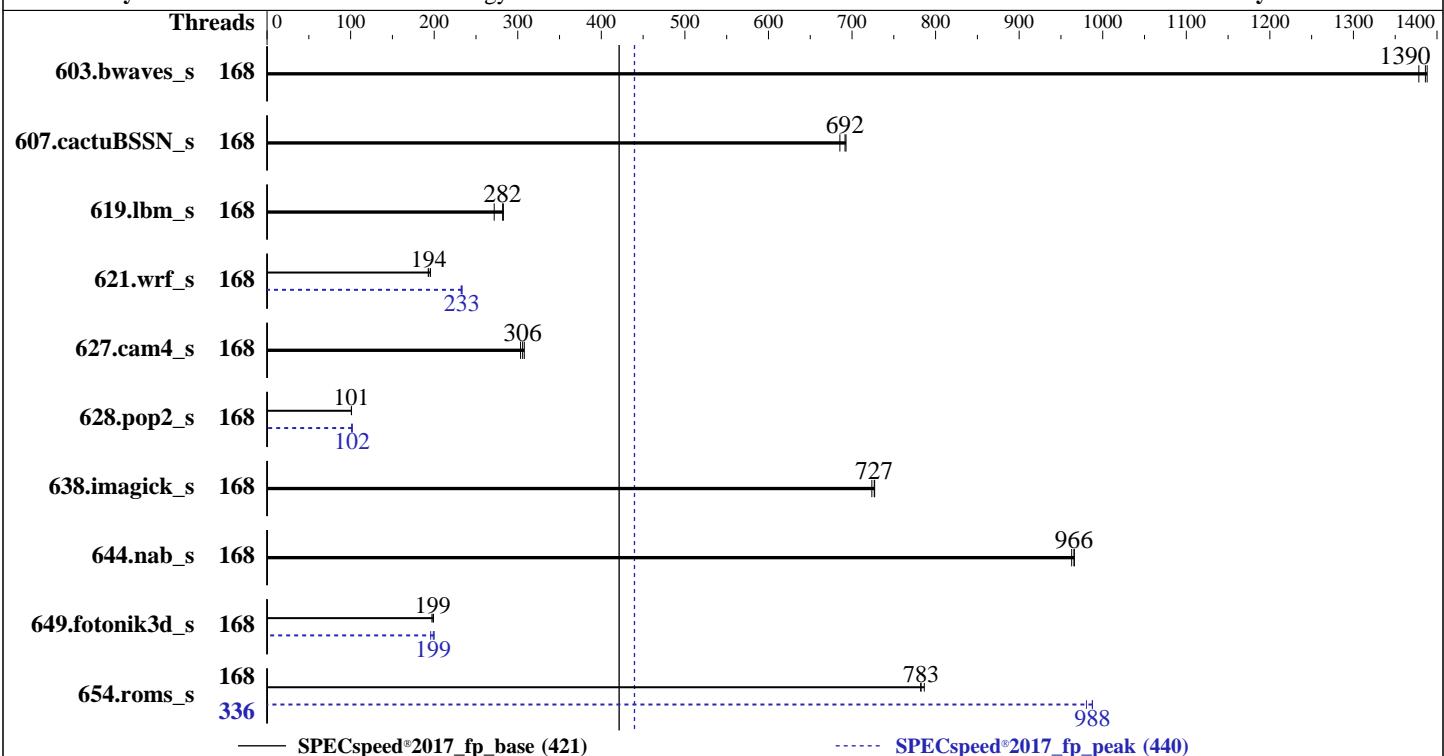

— SPECSpeed®2017_fp_base (421)

----- SPECSpeed®2017_fp_peak (440)

Hardware

CPU Name: AMD EPYC 9634
Max MHz: 3700
Nominal: 2250
Enabled: 168 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip,
32 MB shared / 7 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 3.84 TB NVME SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
Compiler: Kernel 5.14.21-150400.22-default
Parallel: C/C++/Fortran: Version 4.0.0 of AOCC
Firmware: Yes
File System: Lenovo BIOS Version QGE115H 3.10 released Sep-2023
System State: xfs
Base Pointers: Run level 3 (multi-user)
Peak Pointers: 64-bit
Other: 64-bit
Power Management: None
BIOS and OS set to prefer performance at the cost
of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	168	42.8	1380	42.5	1390	42.6	1390	168	42.8	1380	42.5	1390	42.6	1390		
607.cactubSSN_s	168	24.1	692	24.1	693	24.3	685	168	24.1	692	24.1	693	24.3	685		
619.lbm_s	168	19.3	272	18.5	283	18.6	282	168	19.3	272	18.5	283	18.6	282		
621.wrf_s	168	67.6	196	68.3	194	68.6	193	168	56.7	233	56.7	233	56.9	232		
627.cam4_s	168	28.8	308	29.0	306	29.2	303	168	28.8	308	29.0	306	29.2	303		
628.pop2_s	168	117	101	118	101	118	101	168	117	101	117	102	117	102		
638.imagick_s	168	19.9	727	19.8	727	19.9	724	168	19.9	727	19.8	727	19.9	724		
644.nab_s	168	18.1	966	18.1	963	18.1	966	168	18.1	966	18.1	963	18.1	966		
649.fotonik3d_s	168	45.9	199	46.2	197	45.8	199	168	45.8	199	46.5	196	45.6	200		
654.roms_s	168	20.1	783	20.0	786	20.1	782	336	15.9	988	15.9	988	16.1	980		

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactubSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Operating System Notes (Continued)

run as root.

To disable THP for peak runs of 621.wrf_s:

```
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

To enable THP only on request for peak runs of 654.roms_s:

```
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-335"  
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/amd_speed_aocc400_znver4_A_lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "336"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY = "0-167"
```

Environment variables set by runcpu during the 628.pop2_s peak run:

```
GOMP_CPU_AFFINITY = "0-167"
```

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

```
GOMP_CPU_AFFINITY = "0-167"  
PGHPF_ZMEM = "yes"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0 168 1 169 2 170 3 171 4 172 5 173 6 174 7 175 8 176 9 177 10 178 11 179 12 180 13  
181 14 182 15 183 16 184 17 185 18 186 19 187 20 188 21 189 22 190 23 191 24 192 25 193 26 194 27 195  
28 196 29 197 30 198 31 199 32 200 33 201 34 202 35 203 36 204 37 205 38 206 39 207 40 208 41 209 42  
210 43 211 44 212 45 213 46 214 47 215 48 216 49 217 50 218 51 219 52 220 53 221 54 222 55 223 56 224  
57 225 58 226 59 227 60 228 61 229 62 230 63 231 64 232 65 233 66 234 67 235 68 236 69 237 70 238 71  
239 72 240 73 241 74 242 75 243 76 244 77 245 78 246 79 247 80 248 81 249 82 250 83 251 84 252 85 253  
86 254 87 255 88 256 89 257 90 258 91 259 92 260 93 261 94 262 95 263 96 264 97 265 98 266 99 267 100  
268 101 269 102 270 103 271 104 272 105 273 106 274 107 275 108 276 109 277 110 278 111 279 112 280  
113 281 114 282 115 283 116 284 117 285 118 286 119 287 120 288 121 289 122 290 123 291 124 292 125  
293 126 294 127 295 128 296 129 297 130 298 131 299 132 300 133 301 134 302 135 303 136 304 137 305  
138 306 139 307 140 308 141 309 142 310 143 311 144 312 145 313 146 314 147 315 148 316 149 317 150  
318 151 319 152 320 153 321 154 322 155 323 156 324 157 325 158 326 159 327 160 328 161 329 162 330  
163 331 164 332 165 333 166 334 167 335"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Oct 17 15:03:18 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
15:03:18 up 1 min, 1 user, load average: 0.67, 0.30, 0.11
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttym1 - 29Apr22 535days 1.29s 0.24s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3093981
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```
open files          (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority      (-r) 0
stack size          (kbytes, -s) unlimited
cpu time            (seconds, -t) unlimited
max user processes   (-u) 3093981
virtual memory       (kbytes, -v) unlimited
file locks           (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
/bin/bash ./Run036-compliant-amd-speedfp.sh
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.086/templogs/preenv.fpspeed.086.0.log --lognum 086.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9634 84-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 17
stepping        : 1
microcode       : 0xa10113b
bugs            : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores      : 84
siblings        : 168
2 physical ids (chips)
336 processors (hardware threads)
physical id 0: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94
physical id 1: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94
physical id 0: apicids 0-13,16-29,32-45,48-61,64-77,80-93,96-109,112-125,128-141,144-157,160-173,176-189
physical id 1: apicids
256-269,272-285,288-301,304-317,320-333,336-349,352-365,368-381,384-397,400-413,416-429,432-445
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                336
On-line CPU(s) list:  0-335
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9634 84-Core Processor
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECspeed®2017_fp_base = 421

SPECspeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

CPU family:	25
Model:	17
Thread(s) per core:	2
Core(s) per socket:	84
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	3700.1951
CPU min MHz:	1500.0000
BogoMIPS:	4493.11
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl dni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibr skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bni avx2 smep bni2 erms invpcid cqmi rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmi_llc cqmi_occup_llc cqmi_mbm_total cqmi_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbm umip pku ospke avx512_vbni2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpocntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:	AMD-V
L1d cache:	5.3 MiB (168 instances)
L1i cache:	5.3 MiB (168 instances)
L2 cache:	168 MiB (168 instances)
L3 cache:	768 MiB (24 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-83,168-251
NUMA node1 CPU(s):	84-167,252-335
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	5.3M	8	Data	1	64	1	64
L1i	32K	5.3M	8	Instruction	1	64	1	64
L2	1M	168M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-83,168-251

node 0 size: 386749 MB

node 0 free: 382973 MB

node 1 cpus: 84-167,252-335

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 1 size: 386771 MB
node 1 free: 385777 MB
node distances:
node   0   1
 0: 10 32
 1: 32 10

-----
9. /proc/meminfo
MemTotal:      792085772 kB

-----
10. who -r
run-level 3 Apr 29 20:00

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target  Status
multi-user      running

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
                issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections postfix
                purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronynd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmiev
                issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap
                ntpd nvmf-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@
                smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect        wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=0defad2f-24c3-4660-9dad-86a53249f8ba
splash=silent
mitigations=auto
quiet
security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
boost state support:
    Supported: yes
    Active: yes

-----
15. sysctl
kernel.numa_balancing           1
kernel.randomize_va_space       0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```
vm.compaction_proactiveness      20
vm.dirty_background_bytes        0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag           [always] defer defer+madvise madvise never
    enabled          [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag               1
    max_ptes_none        511
    max_ptes_shared      256
    max_ptes_swap        64
    pages_to_scan        4096
    scan_sleep_millisecs 10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP4

-----
19. Disk information
    SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2
    Filesystem  Type  Size  Used Avail Use% Mounted on
    /dev/nvme0n1p2  xfs  893G  21G  873G  3% /

-----
20. /sys/devices/virtual/dmi/id
    Vendor:      Lenovo
    Product:     ThinkSystem SR675 V3 System Board
    Product Family: ThinkSystem
    Serial:      None

-----
21. dmidecode
    Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECspeed®2017_fp_base = 421

SPECspeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

4x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800
8x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800
12x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: QGE115H-3.10
BIOS Date: 09/07/2023
BIOS Revision: 3.10
Firmware Revision: 3.10

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactubSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -futo -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

649.fotonik3d_s (continued):

```
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdaloc -lflang
```

654.roms_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdaloc -lflang
```

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

627.cam4_s: basepeak = yes

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz, AMD EPYC 9634)

SPECSpeed®2017_fp_base = 421

SPECSpeed®2017_fp_peak = 440

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-17 03:03:17-0400.

Report generated on 2023-11-21 20:35:15 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-21.