



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

### QuantaGrid S44NL-1U

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017\_int\_base = 945

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9050


**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Dec-2023

**Hardware Availability:** Nov-2023

**Software Availability:** Nov-2022

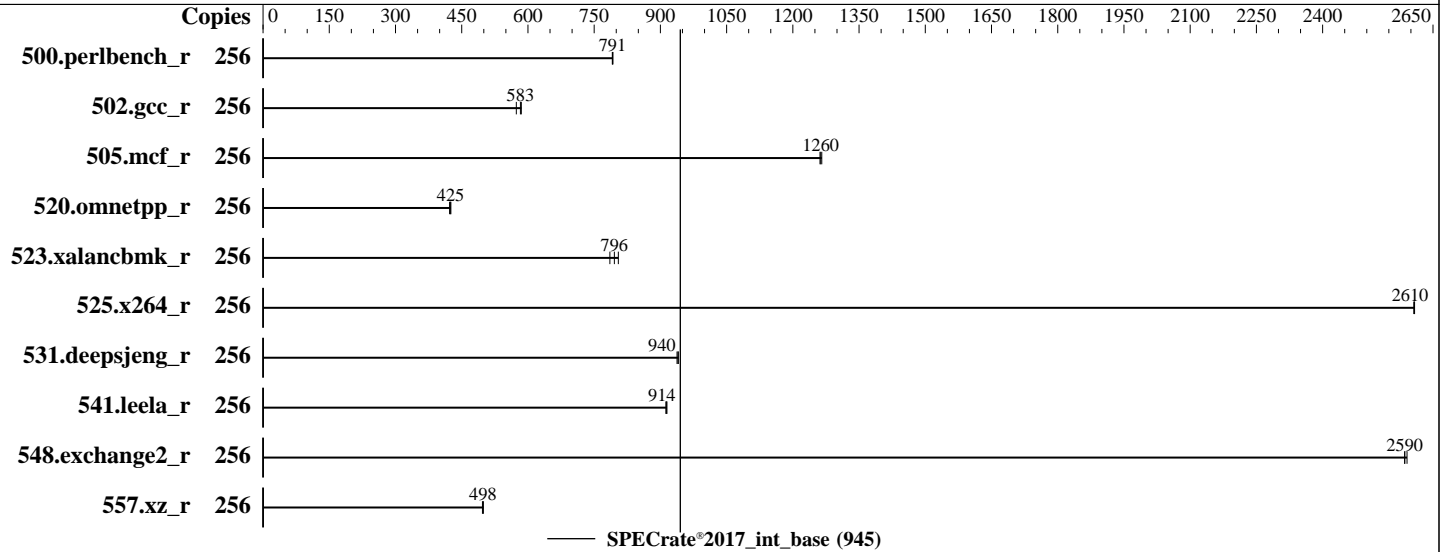

### Hardware

CPU Name: AMD EPYC 9754  
 Max MHz: 3100  
 Nominal: 2250  
 Enabled: 128 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 16 MB shared / 8 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 960 GB NVMe SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 3A09 released Aug-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid S44NL-1U

(2.25 GHz,AMD EPYC 9754)

SPECrate®2017\_int\_base = 945

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Nov-2023

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	515	791	514	793	<u>515</u>	<u>791</u>							
502.gcc_r	256	<u>622</u>	<u>583</u>	620	585	632	574							
505.mcf_r	256	327	1270	<u>328</u>	<u>1260</u>	328	1260							
520.omnetpp_r	256	<u>790</u>	<u>425</u>	790	425	795	422							
523.xalancbmk_r	256	<u>340</u>	<u>796</u>	336	805	344	786							
525.x264_r	256	<u>172</u>	<u>2610</u>	172	2610	172	2610							
531.deepsjeng_r	256	<u>312</u>	<u>940</u>	312	941	313	938							
541.leela_r	256	465	912	<u>464</u>	<u>914</u>	463	915							
548.exchange2_r	256	259	2590	259	2590	<u>259</u>	<u>2590</u>							
557.xz_r	256	554	499	556	497	<u>555</u>	<u>498</u>							

SPECrate®2017\_int\_base = 945

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid S44NL-1U

(2.25 GHz,AMD EPYC 9754)

SPECrate®2017\_int\_base = 945

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Dec-2023

**Hardware Availability:** Nov-2023

**Software Availability:** Nov-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/root/cpu2017/amd\_rate\_aocc400\_znver4\_A\_lib/lib:/root/cpu2017/amd\_rate\_aocc400\_znver4\_A\_lib/lib32:"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

ACPI CST C2 Latency set to 18

NUMA nodes per socket set to NPS4

Determinism Control is Manual

Determinism Slider set to Power

cTDP Control set to Manual

cTDP set to 400

PPT Control set to Manual

PPT set to 400

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Dec 19 04:12:52 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid S44NL-1U  
(2.25 GHz,AMD EPYC 9754)

SPECrate®2017\_int\_base = 945

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Nov-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

21. dmidecode  
22. BIOS

1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
04:12:52 up 3:47, 1 user, load average: 136.18, 224.72, 242.70  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 00:27 3:46m 1.56s 0.05s /bin/bash ./amd\_rate\_aocc400\_znver4\_A1.sh

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 1545932  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 1545932  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
/bin/bash ./test.sh  
python3 ./run\_amd\_rate\_aocc400\_znver4\_A1.py  
/bin/bash ./amd\_rate\_aocc400\_znver4\_A1.sh  
runcpu --config amd\_rate\_aocc400\_znver4\_A1.cfg --tune base --reportable --iterations 3 intrate  
runcpu --configfile amd\_rate\_aocc400\_znver4\_A1.cfg --tune base --reportable --iterations 3 --nopower  
--runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /root/cpu2017

6. /proc/cpuinfo  
model name : AMD EPYC 9754 128-Core Processor  
vendor\_id : AuthenticAMD  
cpu family : 25  
model : 160  
stepping : 1

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid S44NL-1U

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017\_int\_base = 945

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Nov-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

```

microcode      : 0xaa00116
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 128
siblings      : 256
1 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-127
physical id 0: apicids 0-255

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9754 128-Core Processor
CPU family:            25
Model:                 160
Thread(s) per core:    2
Core(s) per socket:    128
Socket(s):             1
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3100.3411
CPU min MHz:           1500.0000
BogoMIPS:              4493.30
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d sme
                        sev sev_es
Virtualization:        AMD-V
L1d cache:             4 MiB (128 instances)
L1i cache:             4 MiB (128 instances)
L2 cache:              128 MiB (128 instances)
L3 cache:              256 MiB (16 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-31,128-159
NUMA node1 CPU(s):    32-63,160-191
NUMA node2 CPU(s):    64-95,192-223

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid S44NL-1U**

(2.25 GHz,AMD EPYC 9754)

SPECrate®2017\_int\_base = 945

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Dec-2023

**Hardware Availability:** Nov-2023

**Software Availability:** Nov-2022

## Platform Notes (Continued)

```

NUMA node3 CPU(s):          96-127,224-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                             filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	16M	256M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-31,128-159
node 0 size: 96411 MB
node 0 free: 95648 MB
node 1 cpus: 32-63,160-191
node 1 size: 96752 MB
node 1 free: 96134 MB
node 2 cpus: 64-95,192-223
node 2 size: 96717 MB
node 2 free: 96270 MB
node 3 cpus: 96-127,224-255
node 3 size: 96625 MB
node 3 free: 96163 MB
node distances:
node  0  1  2  3
 0:  10  12  12  12
 1:  12  10  12  12
 2:  12  12  10  12
 3:  12  12  12  10

```

9. /proc/meminfo

MemTotal: 395783356 kB

10. who -r

run-level 3 Dec 19 00:27

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
havedged irqbalance issue-generator kbdsettings klog lvm2-monitor nsd

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid S44NL-1U

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017\_int\_base = 945

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Nov-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

```

nmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm
grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rdisc rpbind
rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd
indirect wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=0cc41f89-8ac0-4222-a067-6a610cf6a136
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                The governor "performance" may decide which speed to use
                within this range.
boost state support:
Supported: yes
Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid S44NL-1U**

(2.25 GHz,AMD EPYC 9754)

SPECrate®2017\_int\_base = 945

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Dec-2023

**Hardware Availability:** Nov-2023

**Software Availability:** Nov-2022

## Platform Notes (Continued)

17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

18. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise High Performance Computing 15 SP4

```

19. Disk information

SPEC is set to: /root/cpu2017

```

Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 717G 76G 642G 11% /

```

20. /sys/devices/virtual/dmi/id

```

Vendor: Quanta Cloud Technology Inc.
Product: QuantaGrid S44NL-1U
Product Family: S6NL

```

21. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  12x SK Hynix HMC88MEBRA113N 32 GB 2 rank 4800

```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 3A09
BIOS Date: 08/08/2023
BIOS Revision: 5.27
Firmware Revision: 3.17

```

## Compiler Version Notes

```

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

```

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

```

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid S44NL-1U

(2.25 GHz,AMD EPYC 9754)

SPECrate®2017\_int\_base = 945

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Nov-2023

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

-----  
Fortran | 548.exchange2\_r(base)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502 gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid S44NL-1U**

(2.25 GHz,AMD EPYC 9754)

SPECrate®2017\_int\_base = 945

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Dec-2023

**Hardware Availability:** Nov-2023

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.html>

[http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1\\_AMD\\_Bergamo.html](http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1_AMD_Bergamo.html)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid S44NL-1U**

(2.25 GHz,AMD EPYC 9754)

**SPECrate®2017\_int\_base = 945**

**SPECrate®2017\_int\_peak = Not Run**

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Dec-2023

**Hardware Availability:** Nov-2023

**Software Availability:** Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.xml>

[http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1\\_AMD\\_Bergamo.xml](http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1_AMD_Bergamo.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-18 15:12:51-0500.

Report generated on 2024-01-16 17:16:37 by CPU2017 PDF formatter v6716.

Originally published on 2024-01-16.