



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6526Y, 2.80GHz)

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: May-2023

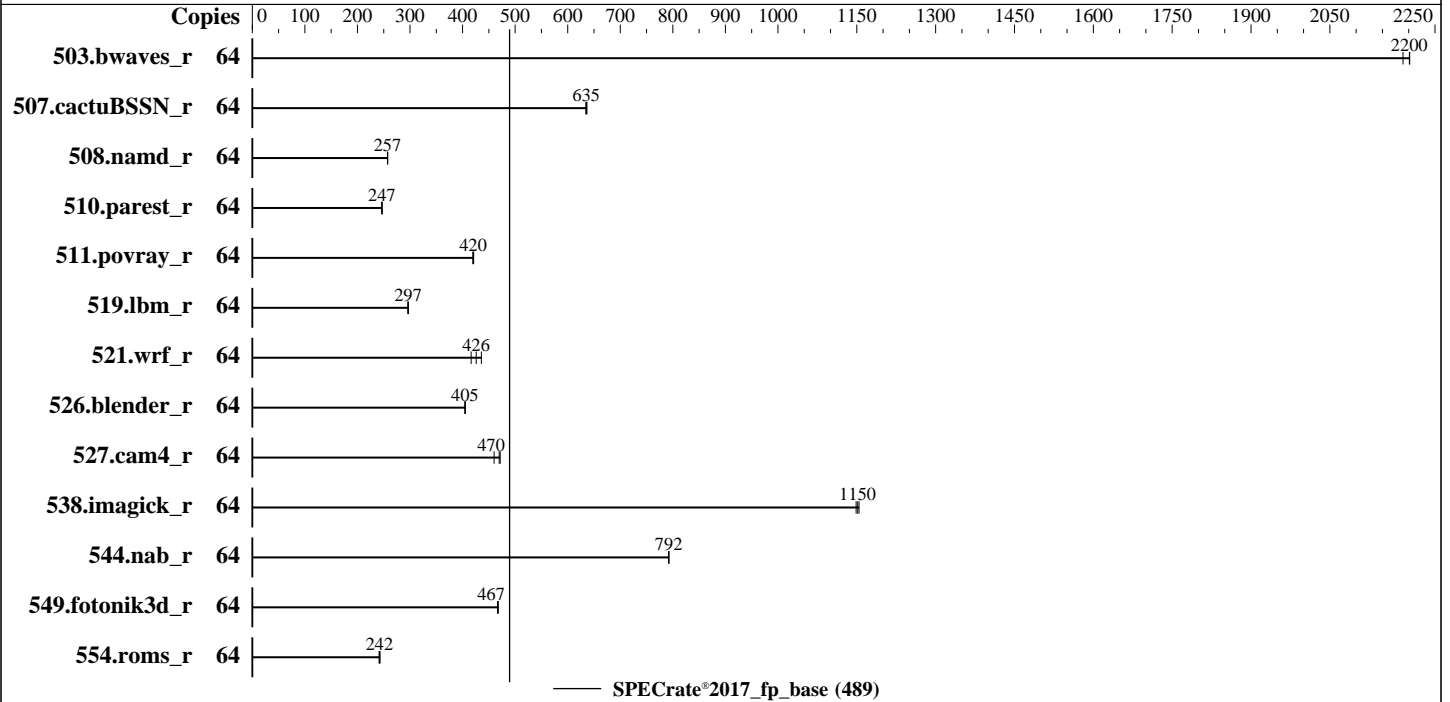

Hardware

CPU Name: Intel Xeon Gold 6526Y
 Max MHz: 3900
 Nominal: 2800
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 37.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)
 Storage: 1 x 960 GB M.2 SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 4.3.3a released Jan-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6526Y, 2.80GHz)

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: May-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	<u>292</u>	<u>2200</u>	293	2190	291	2200							
507.cactuBSSN_r	64	<u>128</u>	<u>635</u>	127	637	128	635							
508.namd_r	64	<u>236</u>	<u>257</u>	236	258	236	257							
510.parest_r	64	<u>679</u>	<u>247</u>	678	247	680	246							
511.povray_r	64	356	420	355	421	<u>356</u>	<u>420</u>							
519.lbm_r	64	227	297	<u>227</u>	<u>297</u>	228	296							
521.wrf_r	64	344	416	329	436	<u>337</u>	<u>426</u>							
526.blender_r	64	<u>241</u>	<u>405</u>	241	405	241	405							
527.cam4_r	64	237	472	243	460	<u>238</u>	<u>470</u>							
538.imagick_r	64	139	1150	<u>138</u>	<u>1150</u>	138	1150							
544.nab_r	64	136	792	136	792	<u>136</u>	<u>792</u>							
549.fotonik3d_r	64	535	467	<u>534</u>	<u>467</u>	533	468							
554.roms_r	64	<u>420</u>	<u>242</u>	422	241	419	243							

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6526Y, 2.80GHz)

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: May-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Sub NUMA Clustering set to Enable SNC2(2-clusters)
Adjacent cache line prefetcher set to Enabled
DCU streamer prefetch set to Disabled
Enhanced CPU performance set to Auto
LLC Dead Line set to Disabled
Processor C6 Report set to Enabled
ADDDC Sparing set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on specsrv Sat Feb 17 08:23:29 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux specsrv 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6526Y, 2.80GHz)

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: May-2023

Platform Notes (Continued)

```
2. w
   08:23:29 up 6:08, 1 user, load average: 18.52, 42.03, 50.98
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root  tty1    -             02:20    6:02m  1.05s  0.14s  -bash
```

```
-----
3. Username
   From environment variable $USER:  root
```

```
-----
4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals        (-i) 4126948
   max locked memory       (kbytes, -l) 64
   max memory size         (kbytes, -m) unlimited
   open files              (-n) 1024
   pipe size               (512 bytes, -p) 8
   POSIX message queues    (bytes, -q) 819200
   real-time priority      (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time                (seconds, -t) unlimited
   max user processes      (-u) 4126948
   virtual memory          (kbytes, -v) unlimited
   file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --reportable --iterations 3 --define smt-on --define
  cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base -o all
  fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --reportable --iterations 3 --define smt-on --define
  cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base
  --output_format all --nopower --runmode rate --tune base --size refrate --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.323/temlogs/preenv.fprate.323.0.log --lognum 323.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
   model name      : INTEL(R) XEON(R) GOLD 6526Y
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 207
   stepping       : 2
   microcode      : 0x21000200
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
   cpu cores      : 16
   siblings       : 32
   2 physical ids (chips)
   64 processors (hardware threads)
   physical id 0 : core ids 0-15
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6526Y, 2.80GHz)

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: May-2023

Platform Notes (Continued)

physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 128-159
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       64
On-line CPU(s) list:         0-63
Vendor ID:                    GenuineIntel
Model name:                   INTEL(R) XEON(R) GOLD 6526Y
CPU family:                   6
Model:                        207
Thread(s) per core:          2
Core(s) per socket:          16
Socket(s):                    2
Stepping:                     2
CPU max MHz:                  3900.0000
CPU min MHz:                  800.0000
BogoMIPS:                     5600.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                vmmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                                hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                                avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                                avx512_vpopsntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                amx_tile flush_lld arch_capabilities
Virtualization:               VT-x
L1d cache:                    1.5 MiB (32 instances)
L1i cache:                    1 MiB (32 instances)
L2 cache:                     64 MiB (32 instances)
L3 cache:                     75 MiB (2 instances)
NUMA node(s):                 4
NUMA node0 CPU(s):            0-7,32-39
NUMA node1 CPU(s):            8-15,40-47
NUMA node2 CPU(s):            16-23,48-55
NUMA node3 CPU(s):            24-31,56-63
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6526Y, 2.80GHz)

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: May-2023

Platform Notes (Continued)

Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	37.5M	75M	15	Unified	3	40960	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-7,32-39
node 0 size: 257693 MB
node 0 free: 252977 MB
node 1 cpus: 8-15,40-47
node 1 size: 258009 MB
node 1 free: 254318 MB
node 2 cpus: 16-23,48-55
node 2 size: 258043 MB
node 2 free: 254332 MB
node 3 cpus: 24-31,56-63
node 3 size: 258014 MB
node 3 free: 254221 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056523492 kB

10. who -r

run-level 3 Feb 17 02:15

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6526Y, 2.80GHz)

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: May-2023

Platform Notes (Continued)

indirect systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=7a984919-bd0d-4451-8476-5139e3d5b29b
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.90 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6526Y, 2.80GHz)

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: May-2023

Platform Notes (Continued)

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3       xfs   220G  29G  192G  13% /
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:         Cisco Systems Inc
Product:        UCSC-C240-M7SX
Serial:         WZP26330JLV
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 5200
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:    Cisco Systems, Inc.
BIOS Version:   C240M7.4.3.3a.0.0118241337
BIOS Date:      01/18/2024
BIOS Revision:  5.32
-----
```

Compiler Version Notes

```
=====
C          | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 508.namd_r(base) 510.parest_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C    | 511.povray_r(base) 526.blender_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6526Y, 2.80GHz)

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: May-2023

Compiler Version Notes (Continued)

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6526Y, 2.80GHz)

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: May-2023

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6526Y, 2.80GHz)

SPECrate®2017_fp_base = 489

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: May-2023

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-EMR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-EMR-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-17 11:23:29-0500.

Report generated on 2024-03-14 11:02:47 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-13.